

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

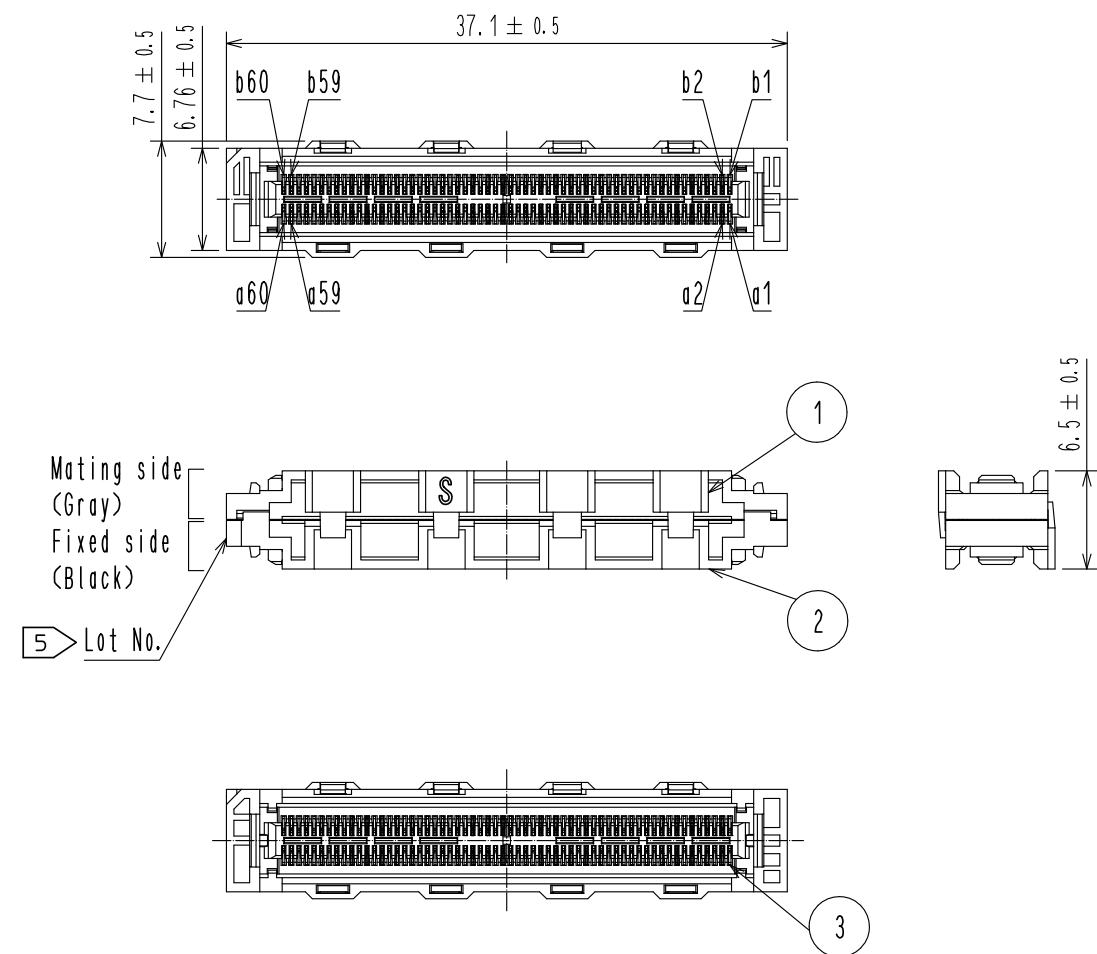


Table.1 Stacking height and connector combinations ◀ 1

Board distance (Stacking height)	Header connector of Board α	Interposer	Header connector of Board β	Recommended spacer height(L) ◀ 3
8mm	FX10A-120P-SV(**)	FX10-120IP-8H(03)	FX10A-120P-SV(**)	8 ± 0.127mm
9mm	FX10A-120P-SV1(**)		FX10A-120P-SV(**)	9 ± 0.127mm
10mm	FX10A-120P-SV1(**)		FX10A-120P-SV1(**)	10 ± 0.127mm

Table.2 Pin configuration of Interposer ◀ 4

Row A Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Pin configuration	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		
Row B Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
Pin configuration	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S		

S: Signal

- Note.
- 1 The header connectors are decided by board distance (stacking height). Connector combination is shown in Table 1.
 - 2 Fixed side (Black side) of interposer should be mated with header mounted on board α.
Mating side (Gray side) should be mated with header mounted on board β.
 - 3 Spacers are required to support the PWB's and protect the SMT solder joints.
Recommended spacer height is shown in Table 1.
 - 4 Pin configuration is shown in Table 2.
This product consists of 120 Single-ended lines.
 - 5 Lot No. shall be marked on the indicated position.
 - 6 50pcs of this product are packed in soft tray. See Fig.3 for details.

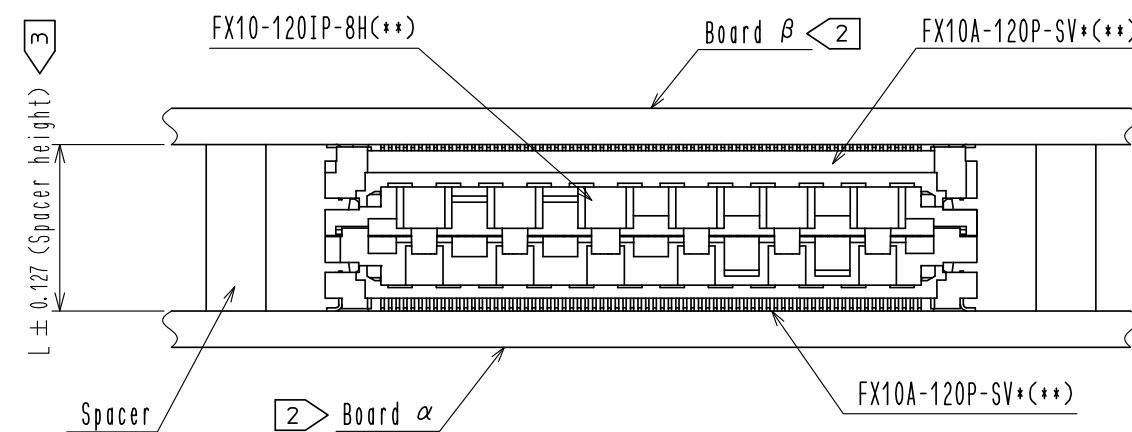


Fig.1 Recommended spacer height (Free)

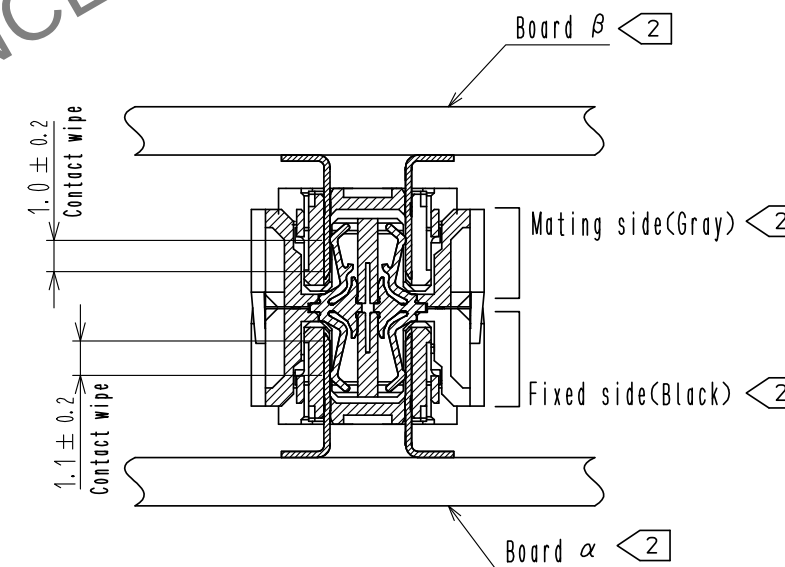



Fig.2 Mating cross section (Free)

2	LCP(Black)	UL94V-0	4	PS	(Tray)			
1	LCP(Gray)	UL94V-0	3	Copper Alloy	Ni1.5μm+Au0.76μm			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : TM. MATSUO		17. 07. 20		DRAWING NO.	EDC-361677-03-00		
	CHECKED : MK. EZAKI		17. 07. 20		PART NO.	FX10-120IP-8H(03)		
	DESIGNED : AS. MATSUZAWA		17. 07. 20		CODE NO.	CL608-0017-3-03		
	DRAWN : XINGYU CHENG		17. 07. 20			 1/2		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


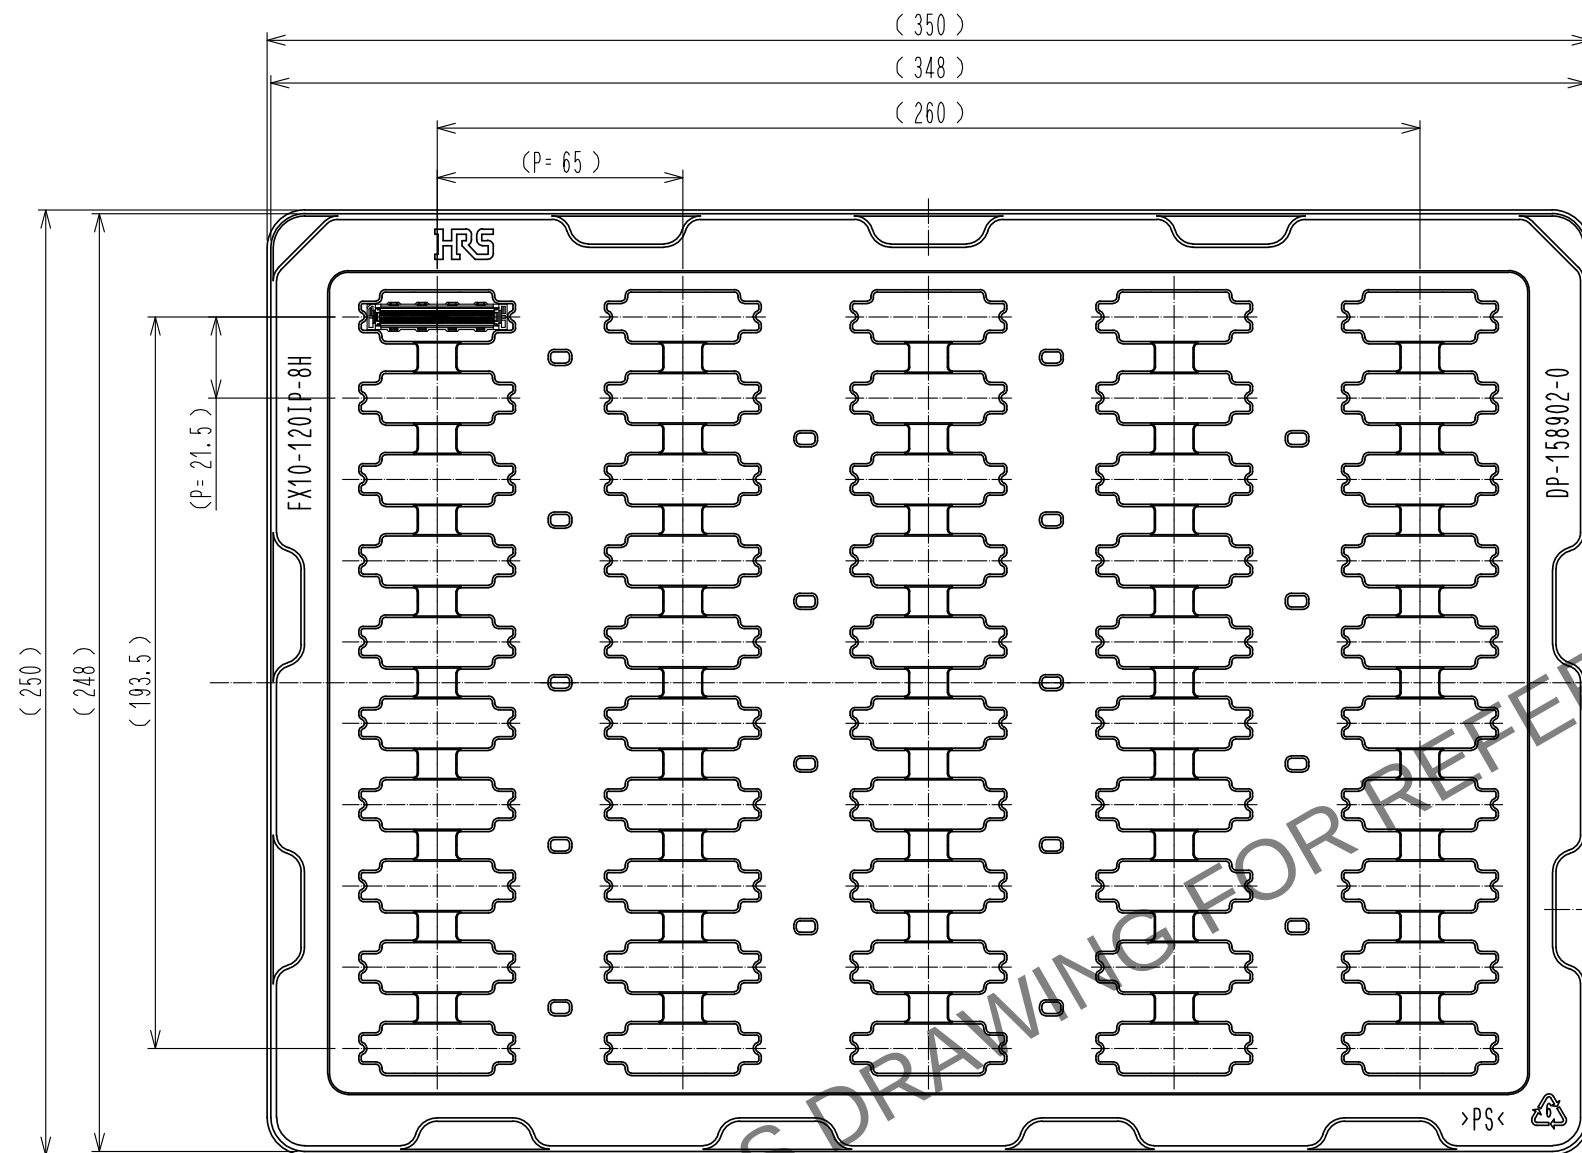


Fig.3 Drawing for packing (1:2) 

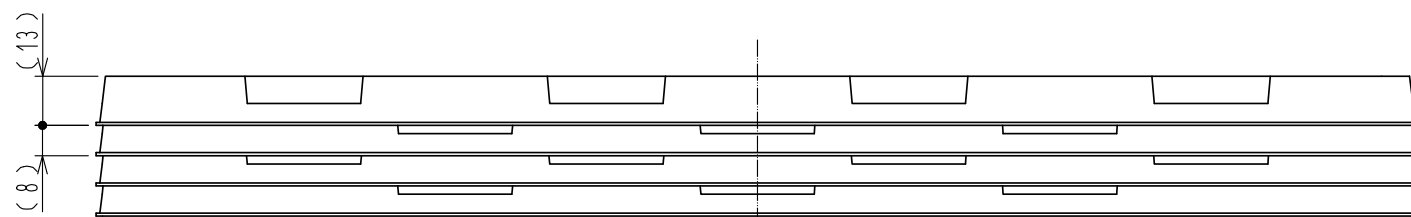


Fig.4 Stacked tray drawing (1:2)

	DRAWING NO.	EDC-361677-03-00	
	PART NO.	FX10-120IP-8H<03>	
	CODE NO.	CL608-0017-3-03	 2/2