


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

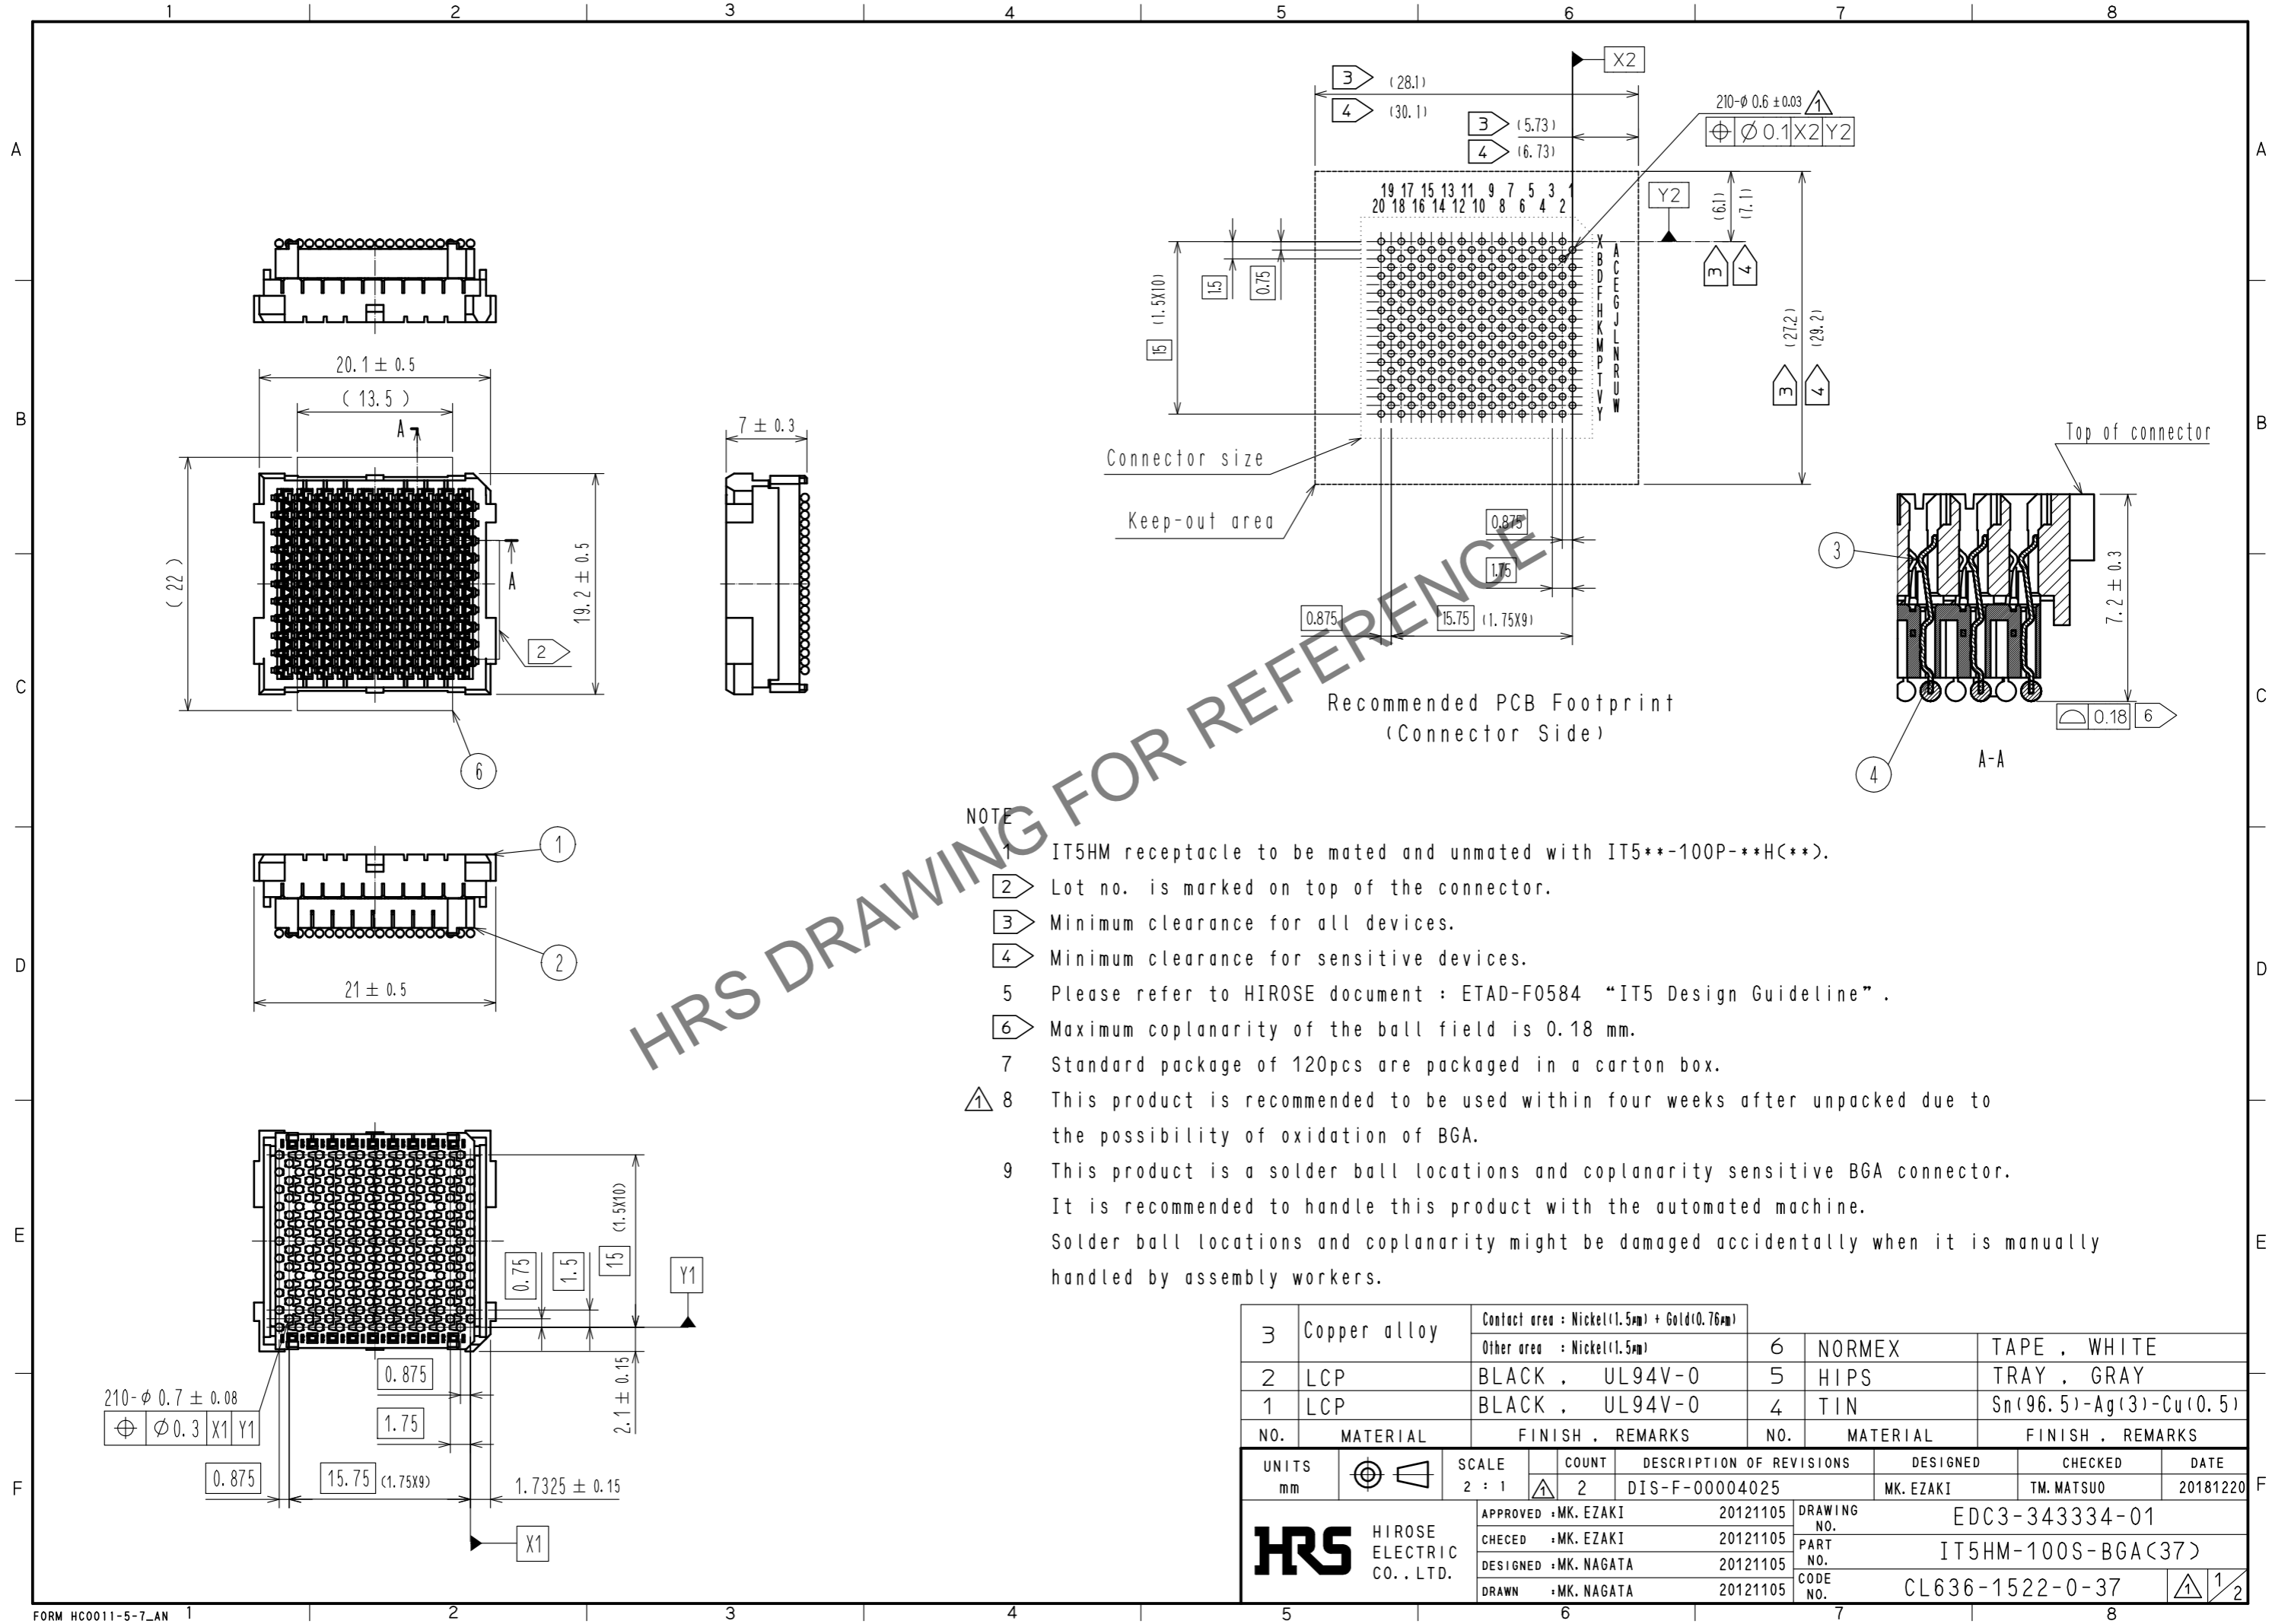


HRS DRAWING FOR REFERENCE

- NOTE**
- 1 IT5HM receptacle to be mated and unmated with IT5**-100P-***H(**).
 - 2 Lot no. is marked on top of the connector.
 - 3 Minimum clearance for all devices.
 - 4 Minimum clearance for sensitive devices.
 - 5 Please refer to HIROSE document : ETAD-F0584 "IT5 Design Guideline".
 - 6 Maximum coplanarity of the ball field is 0.18 mm.
 - 7 Standard package of 120pcs are packaged in a carton box.
 - 8 This product is recommended to be used within four weeks after unpacked due to the possibility of oxidation of BGA.
 - 9 This product is a solder ball locations and coplanarity sensitive BGA connector. It is recommended to handle this product with the automated machine. Solder ball locations and coplanarity might be damaged accidentally when it is manually handled by assembly workers.

3	Copper alloy	Contact area : Nickel(1.5 μ m) + Gold(0.76 μ m) Other area : Nickel(1.5 μ m)	6	NORMEX	TAPE . WHITE
2	LCP	BLACK , UL94V-0	5	HIPS	TRAY . GRAY
1	LCP	BLACK , UL94V-0	4	TIN	Sn(96.5)-Ag(3)-Cu(0.5)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-00004025	
APPROVED : MK. EZAKI 20121105			DESIGNED MK. EZAKI		
CHECKED : MK. EZAKI 20121105			CHECKED TM. MATSUO		
DESIGNED : MK. NAGATA 20121105			DATE 20181220		
DRAWN : MK. NAGATA 20121105			DRAWING NO. EDC3-343334-01		
HRS HIROSE ELECTRIC CO., LTD.			PART NO. IT5HM-100S-BGA(37)		
			CODE NO. CL636-1522-0-37		

Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

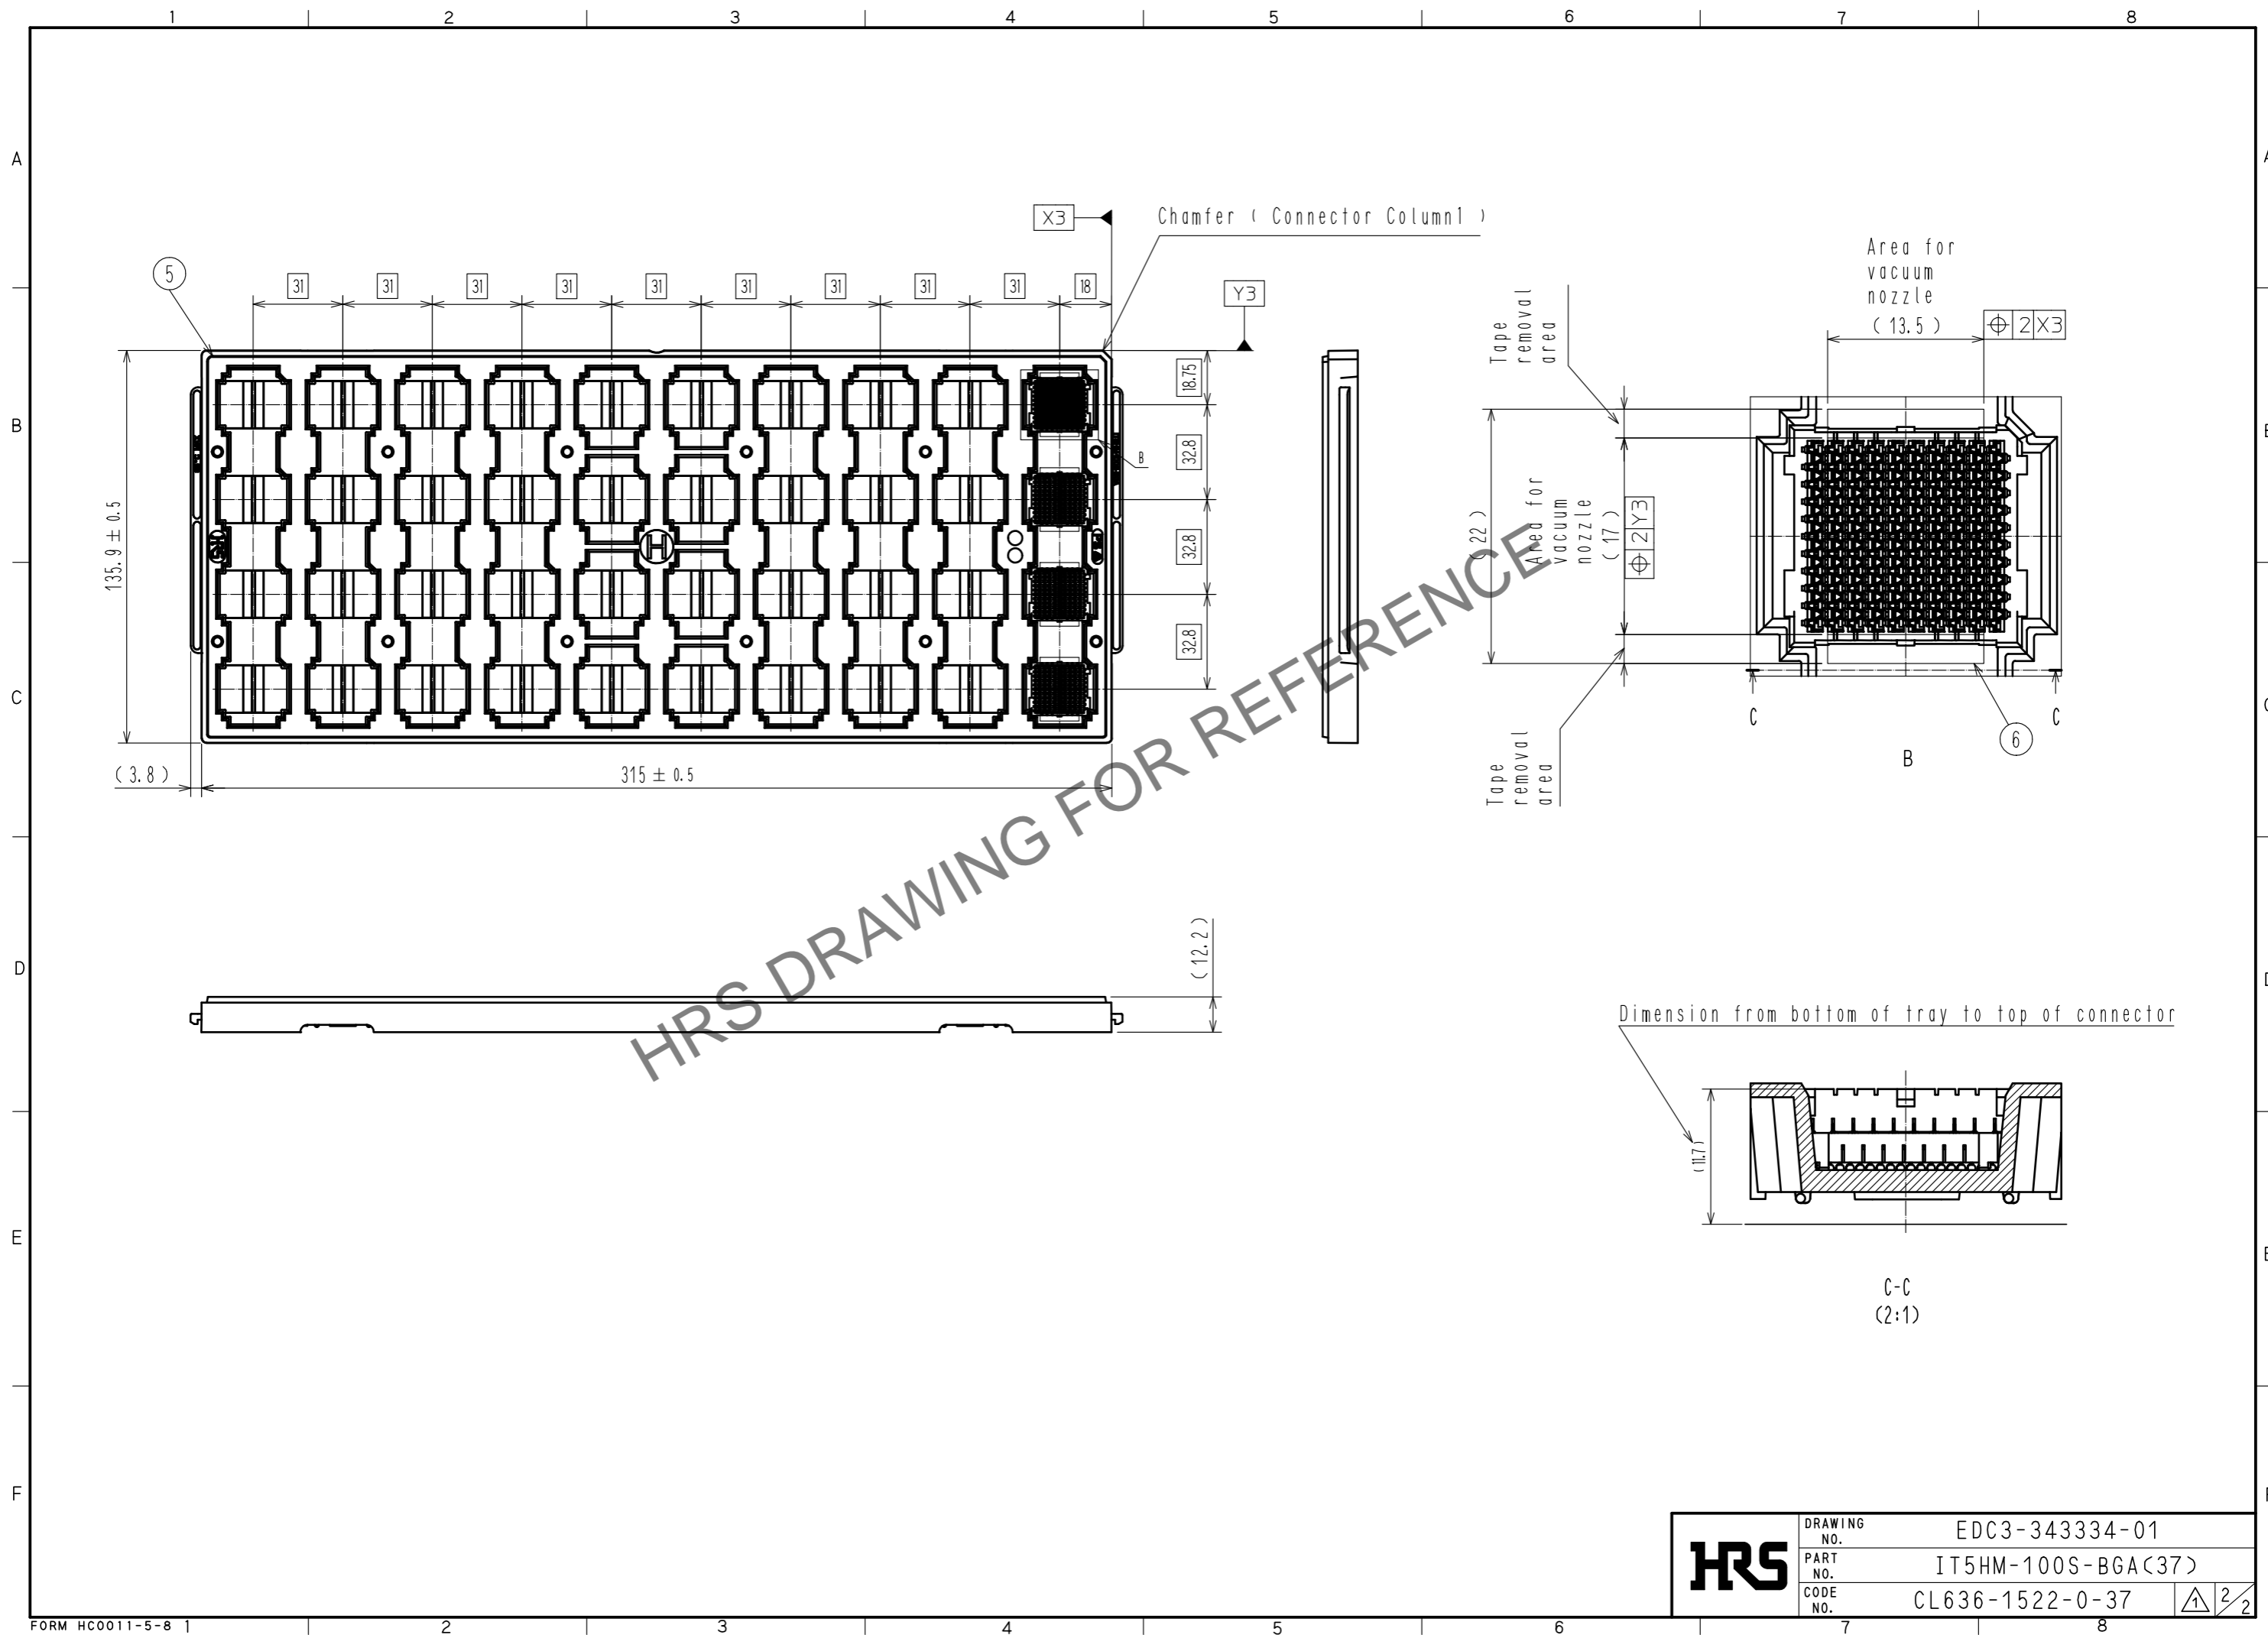

HRS	DRAWING NO.	EDC3-343334-01
	PART NO.	IT5HM-100S-BGA(37)
	CODE NO.	CL636-1522-0-37
		\triangle 2/2