
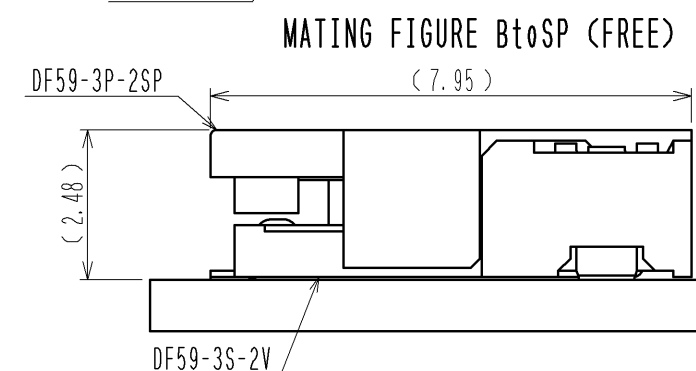
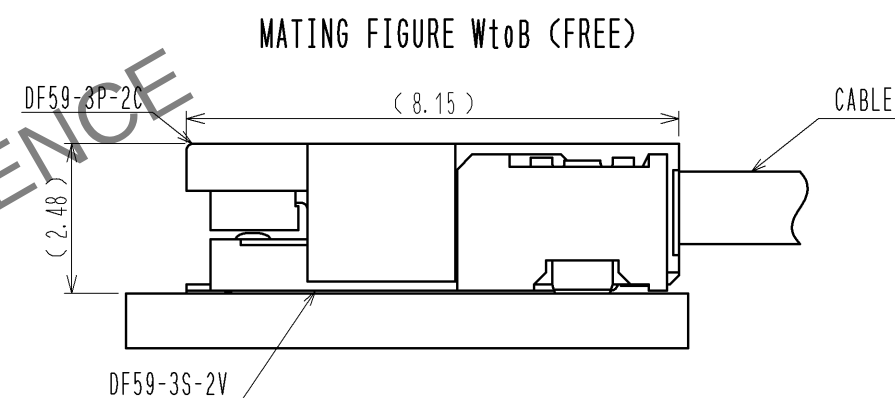
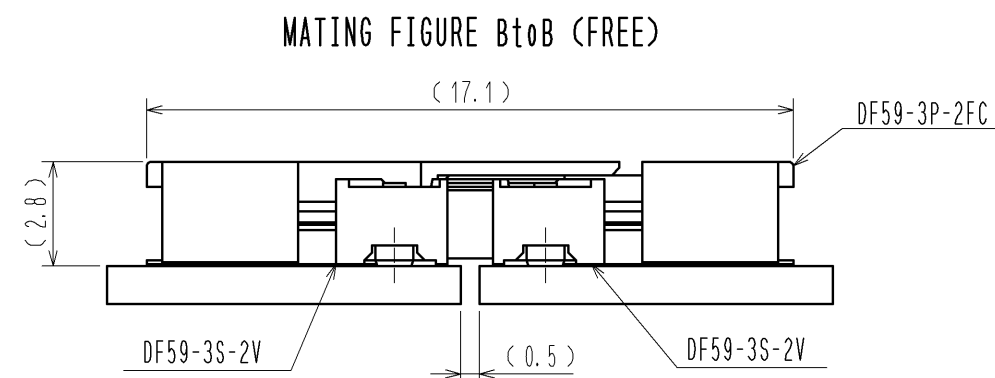


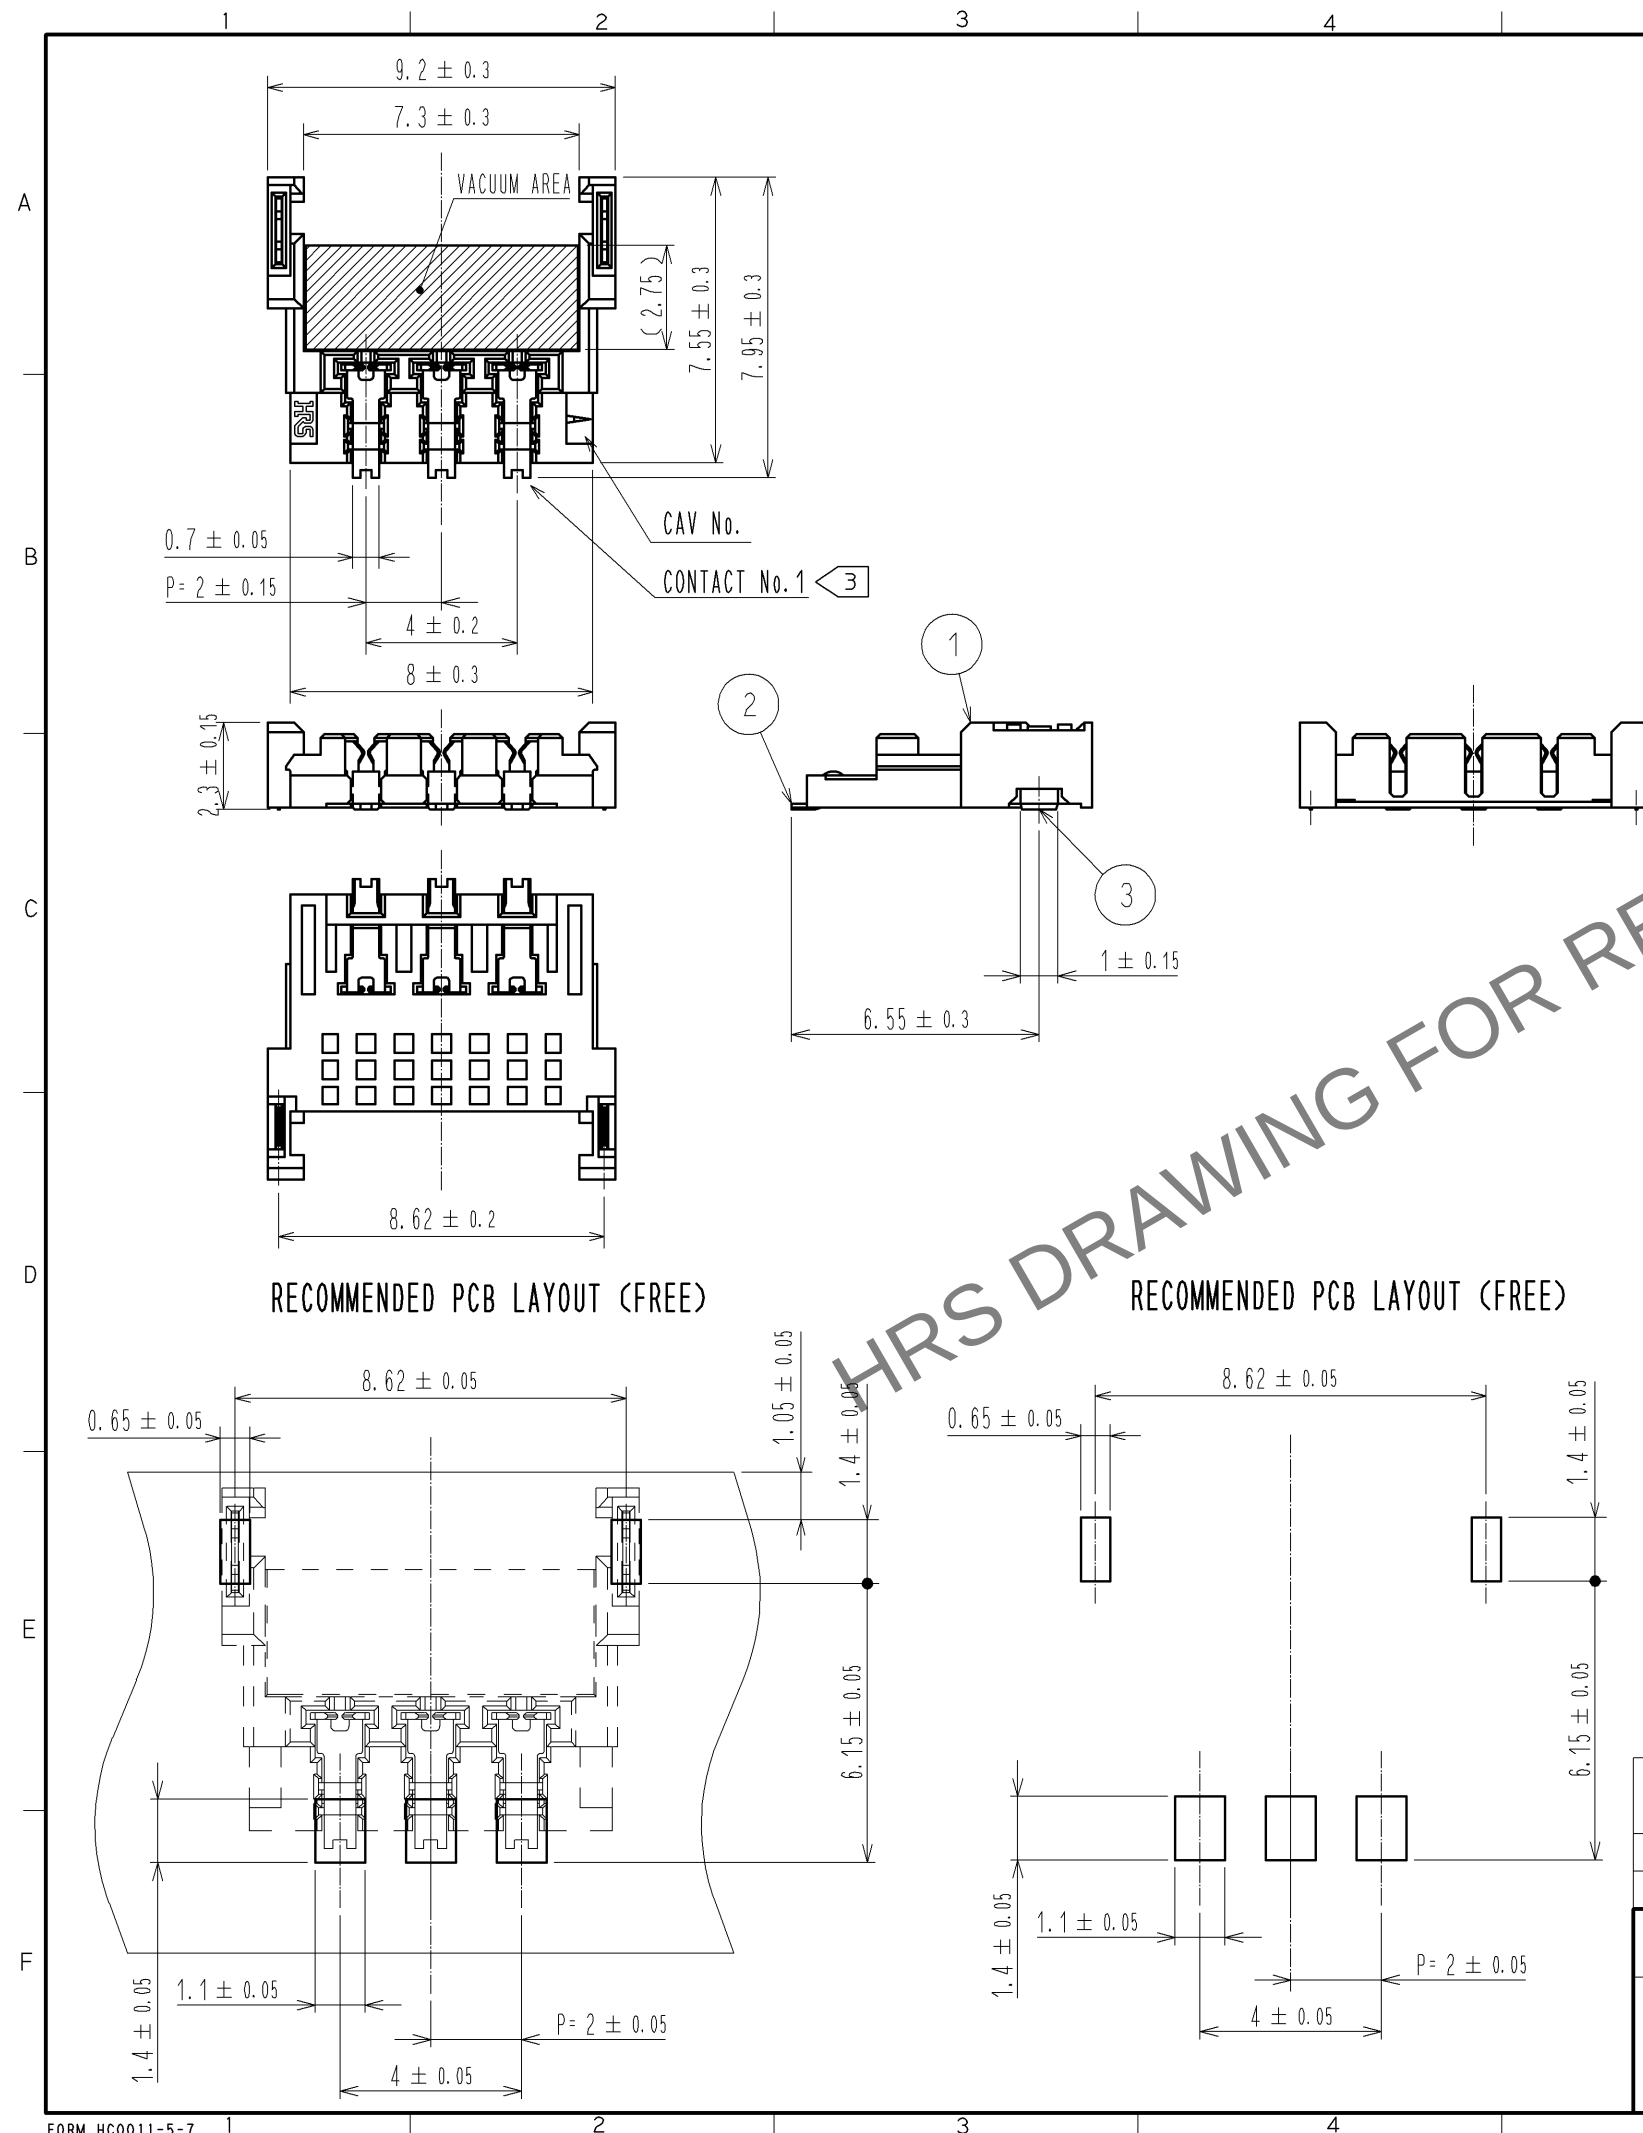

NOTE1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.

2. () IS REFERENCE DIMENSION.

3 MATING DF59-3P-2C, DF59-3P-2SP ARE APPLIED.

4. REFER TO THE DF59 SERIES MATING/UNMATING OPERATION INSTRUCTION MANUAL(ETAD-H0496) FOR THE OPERATING OF THE PRODUCT.

3 5. UL(FILE NO. E52653),

C-UL(FILE NO. E52653) APPROVED PRODUCT.



C-0L(FILE NO. E52653) APPROVED PRODUCT.					5	PS	REEL , BLACK	
					6	POLYESTER	CLEAR(COVER TAPE)	
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2μm MIN LEAD AREA : TIN PLATING 1μm MIN UNDER PLATING : NICKEL PLATING 0.5μm MIN			4	PS	CLEAR(EMBOSSED CARIER TAPE)	
1	LCP	UL94V-0,BEIGE			3	PHOSPHOR BRONZE	SURFACE : TIN PLATING 1μm MIN UNDER PLATING : NICKEL PLATING 0.5μm MIN	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS	
UNITS mm		SCALE 5 : 1	COUNT 5	DESCRIPTION OF REVISIONS DIS-H-006828		DESIGNED MI. SAKIMURA	CHECKED HK. UMEHARA	DATE 12. 04. 20
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		10. 09. 28	DRAWING NO. EDC3-330589-01			
		CHECKED : OM. MIYAMOTO		10. 09. 27	PART NO. DF59-3S-2V(51)			
		DESIGNED : KT. ISHII		10. 09. 27	CODE NO. CL667-0002-3-51			
		DRAWN : KT. ISHII		10. 09. 27				

