


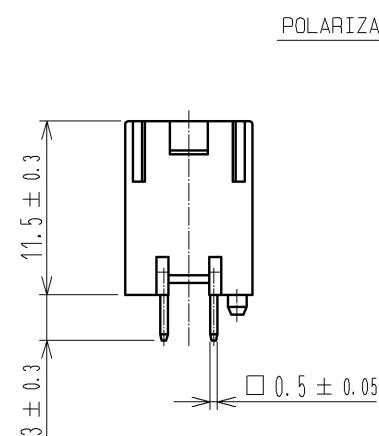



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

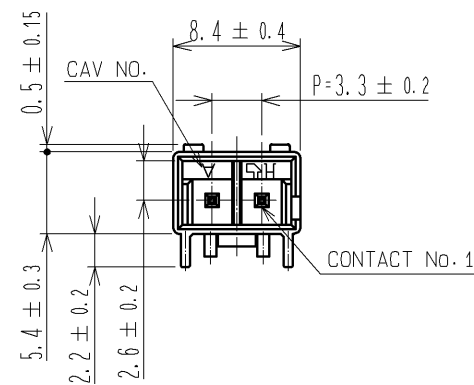


POLARIZATION MARK

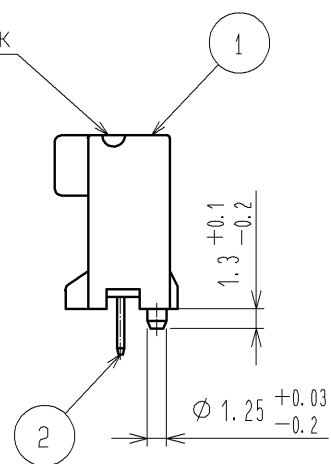


LOT No.



APPLICATION DIAGRAM

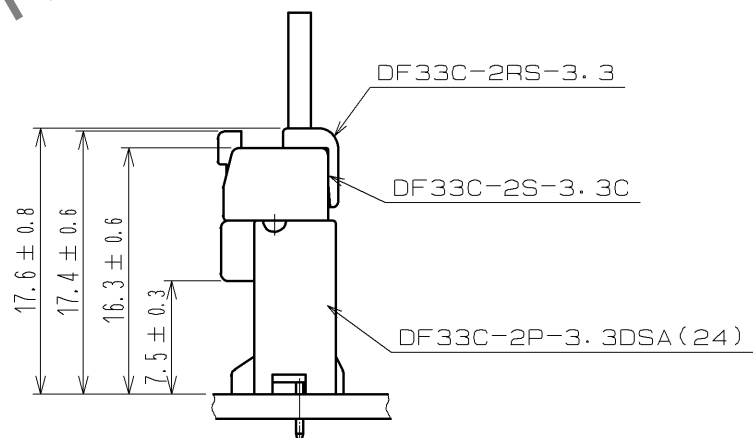


RECOMMENDED PATTERN(5:1)
(RECOMMENDED BOARD THICKNESS t=1.6mm)

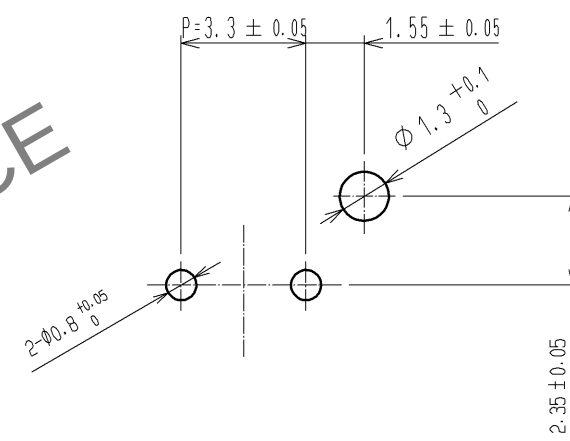


NOTES 1 :IMMERSION DEPTH INTO POTTING SOLUTION:6.5mm

△ 2 :FORCEFULLY UNMATING THE CONNECTORS WILL RISK DAMAGING THEM; THEREFORE,WHEN IT IS DIFFICULT TO UNMATE A CONNECTOR,FIRST GENTLY PRESS DOWN ON IT,THEN RELEASE THE LOCK TO ALLOW REMOVAL.

			3		HIPS	TRAY											
			2		BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min											
1	PBT	WHITE, UL94V-0															
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS							
UNITS mm				SCALE 2 : 1				COUNT 2	DESCRIPTION OF REVISIONS			DESIGNED HT. SATO		CHECKED TS. FUKUSHIMA		DATE 14. 05. 19	
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA				12. 07. 24		DRAWING NO.		EDC3-338420-01							
		CHECKED : HK. UMEHARA				12. 07. 24		PART NO.		DF33C-2P-3. 3DSA<24>							
		DESIGNED : HT. SATO				12. 07. 24		CODE NO.		CL676-1131-2-24							
		DRAWN : MI. SAKIMURA				12. 07. 23				 							

HRS HIROSE
ELECTRIC
CO., LTD.

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

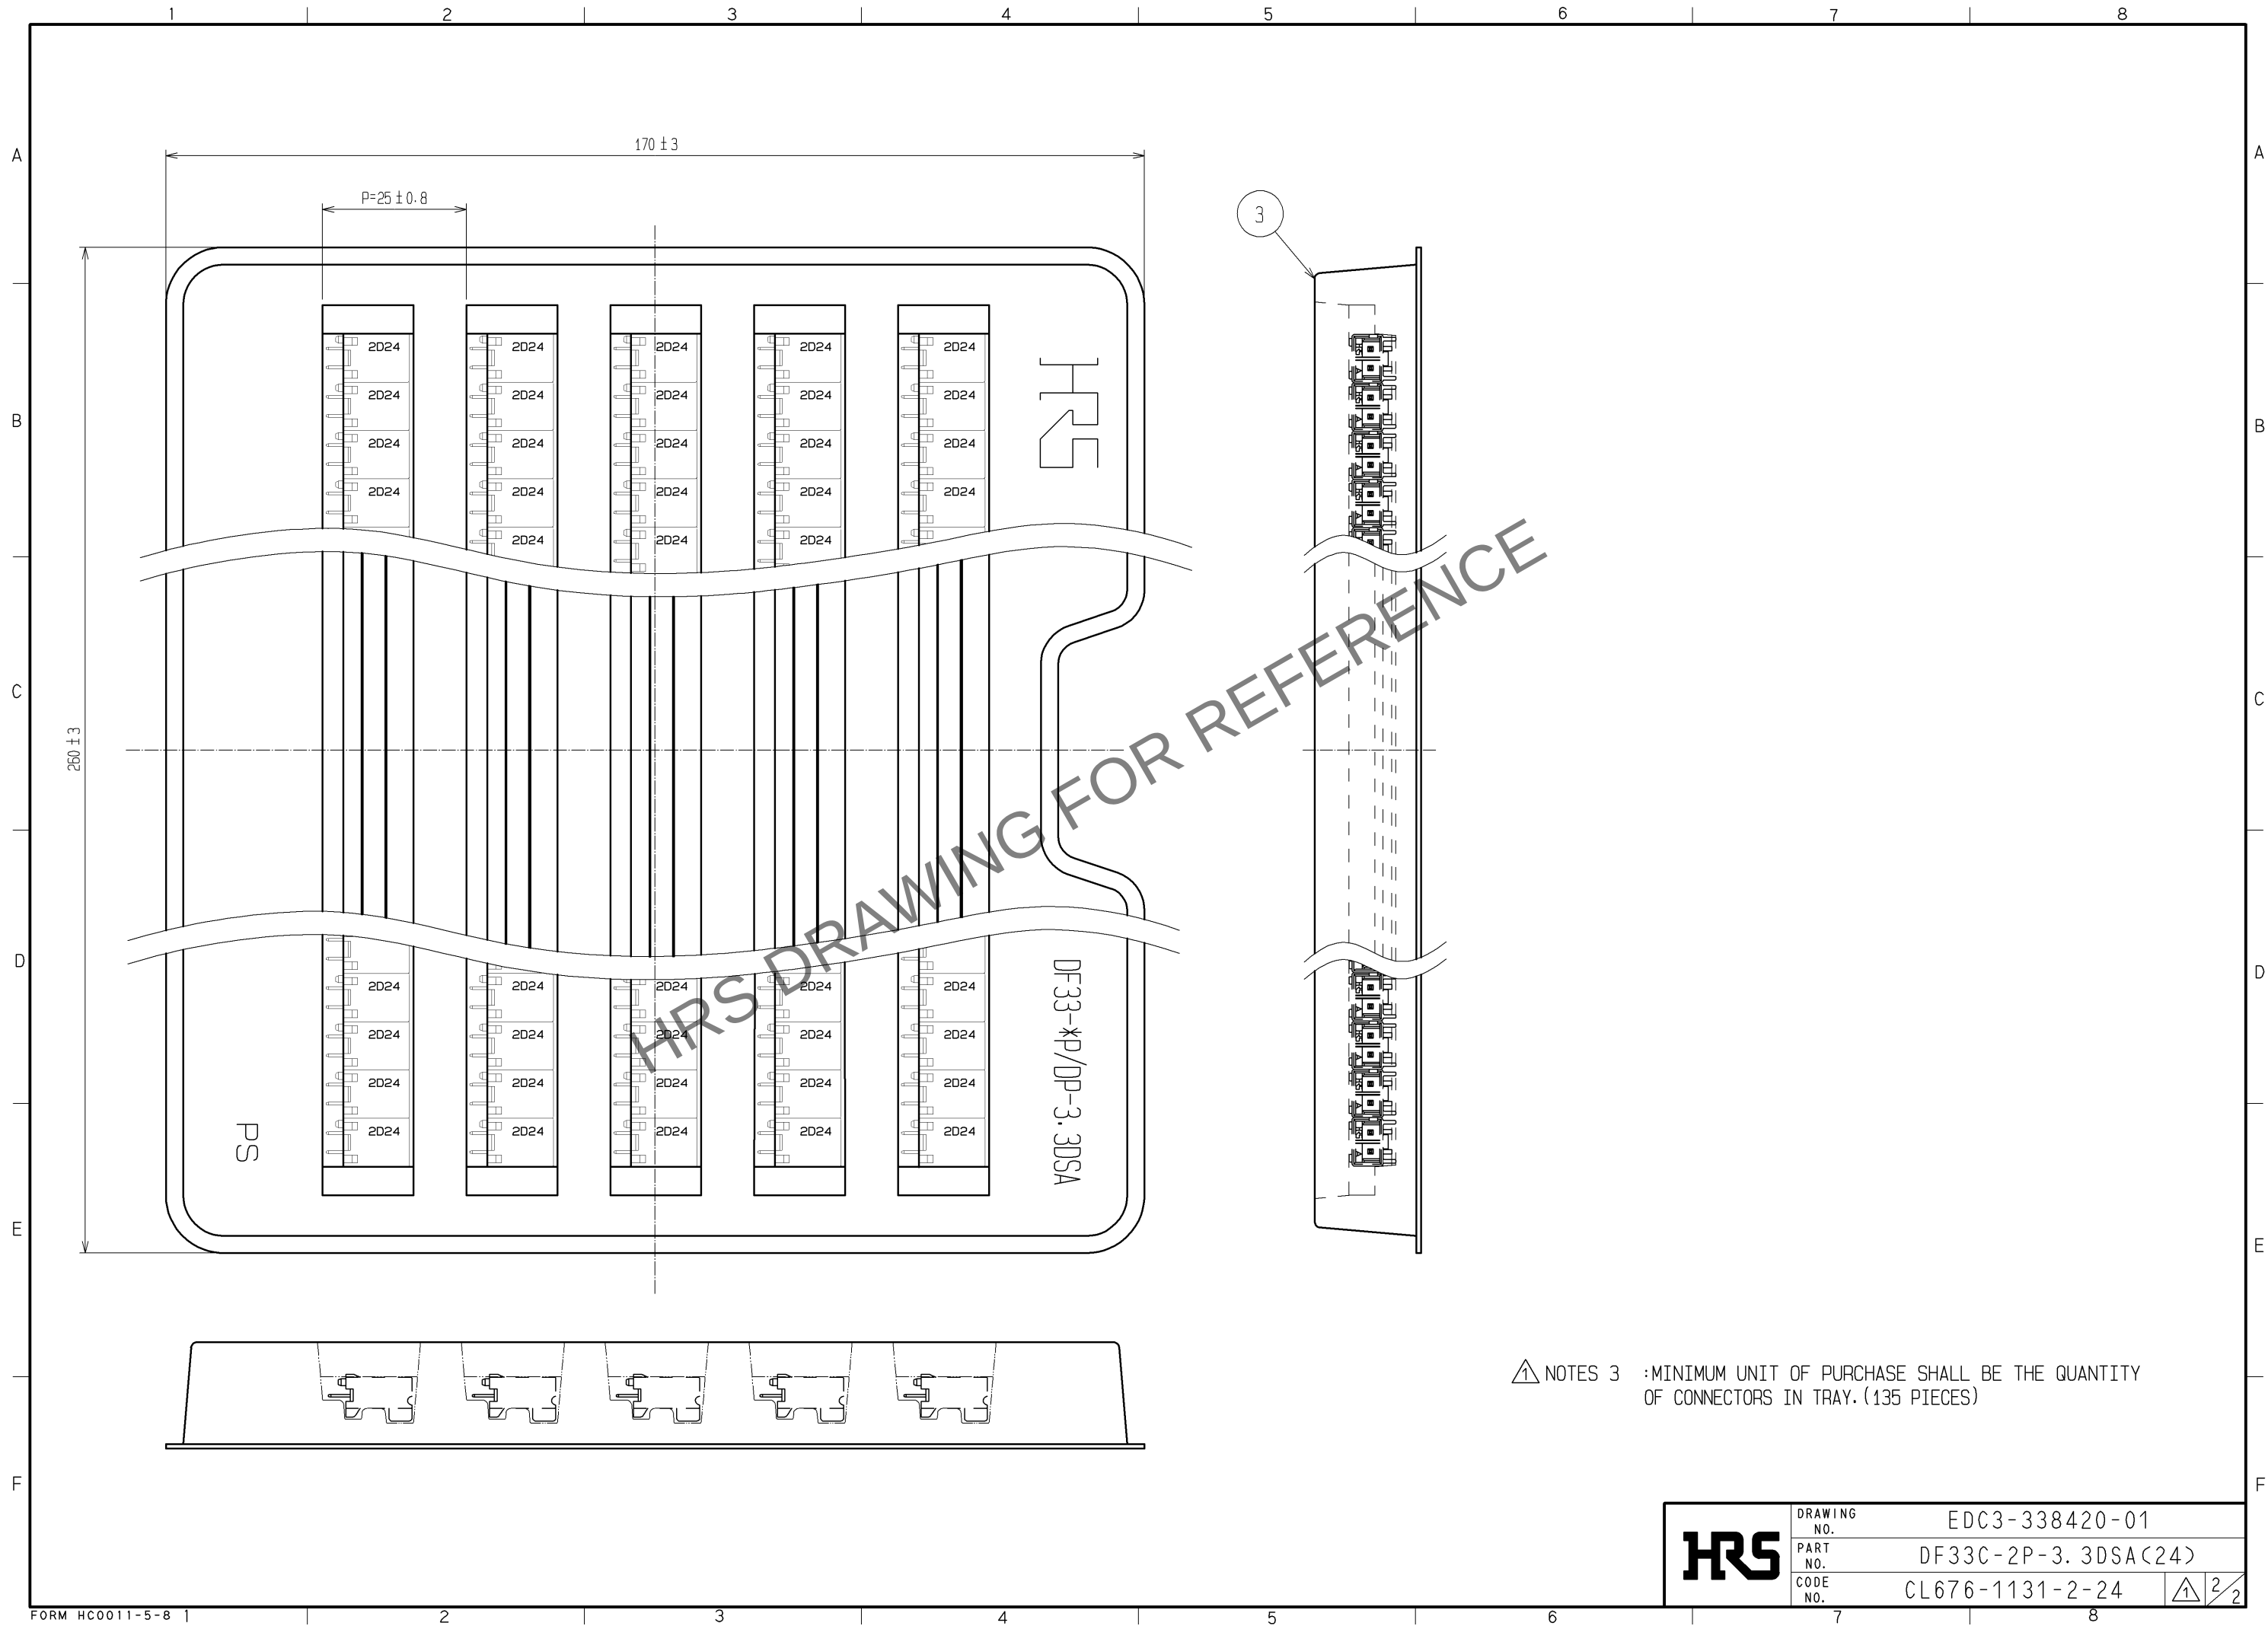

△ NOTES 3 :MINIMUM UNIT OF PURCHASE SHALL BE THE QUANTITY OF CONNECTORS IN TRAY.(135 PIECES)

HRS

DRAWING NO.	EDC3-338420-01
PART NO.	DF33C-2P-3. 3DSA(24)
CODE NO.	CL676-1131-2-24

△ 2/2