
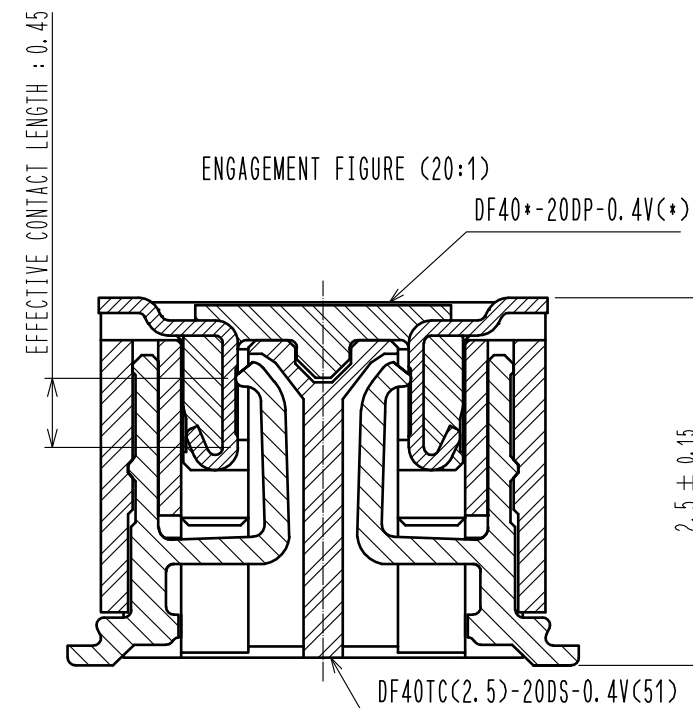
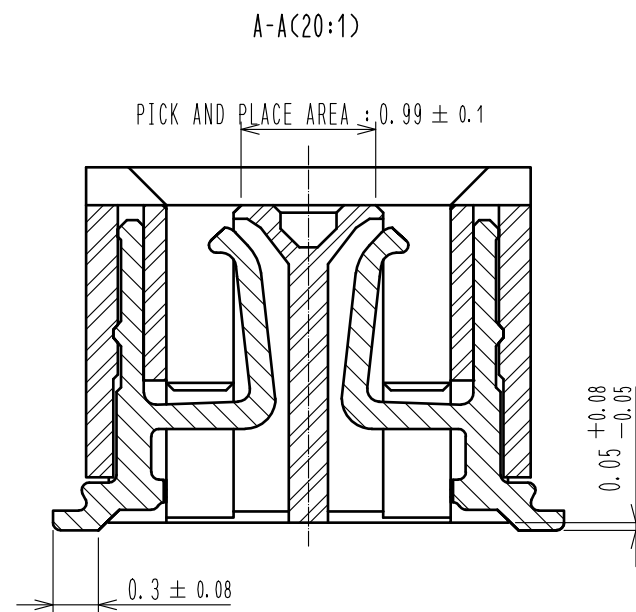
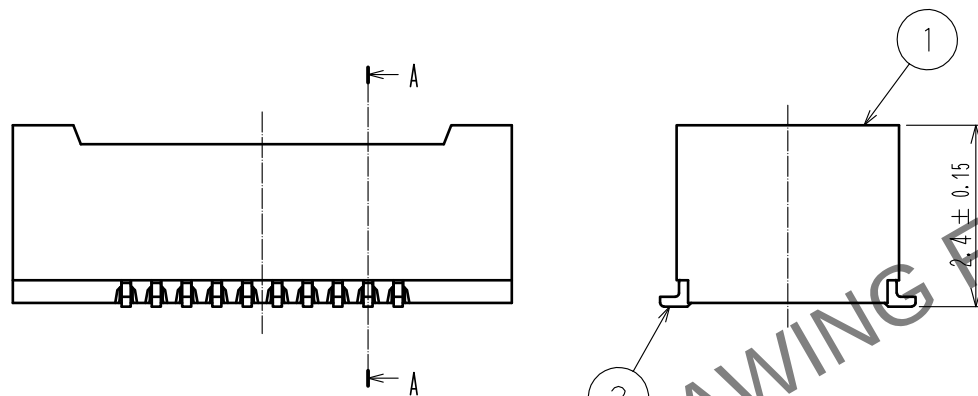


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

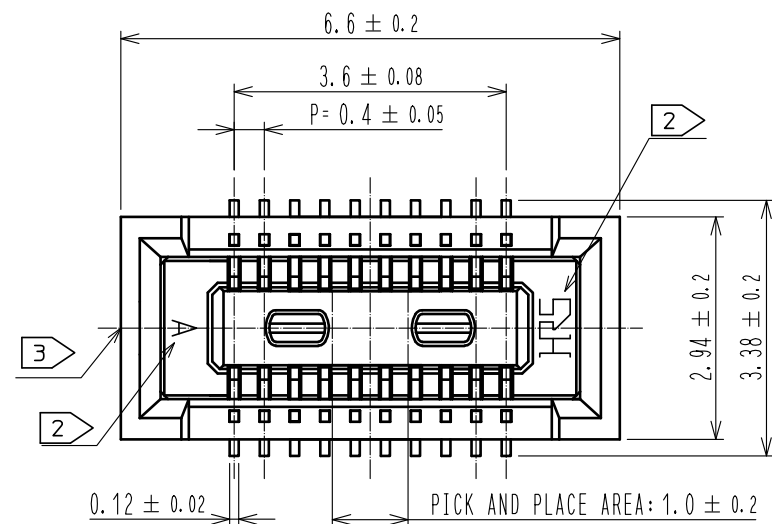





NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
2. HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
3. GATE IS COCATED IN APPROXIMAL AREA.

2	COPPER ALLOY	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK, PLASTIC REEL
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS


UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	:WR. FUKUCHI		20190806	DRAWING NO. EDC-389766-51-00		
		CHECED	:TS. MIYAZAKI		20190806	PART NO. DF40TC(2.5)-20DS-0.4V(51)		
		DESIGNED	:TY. MORISHITA		20190806	CODE NO. CL684-4280-0-51		
		DRAWN	:PAN YIWEI		20190806	 		

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


EMBOSSED CARRIER TAPE PACKAGING (5:1)

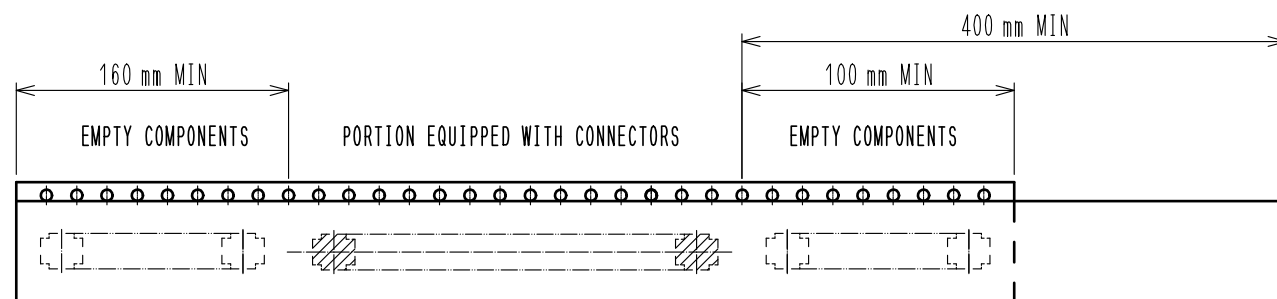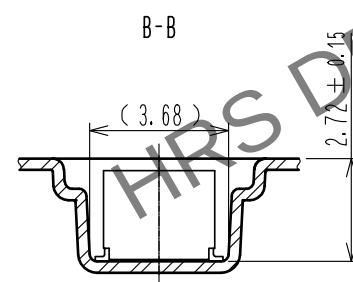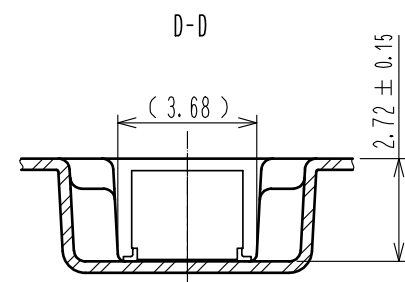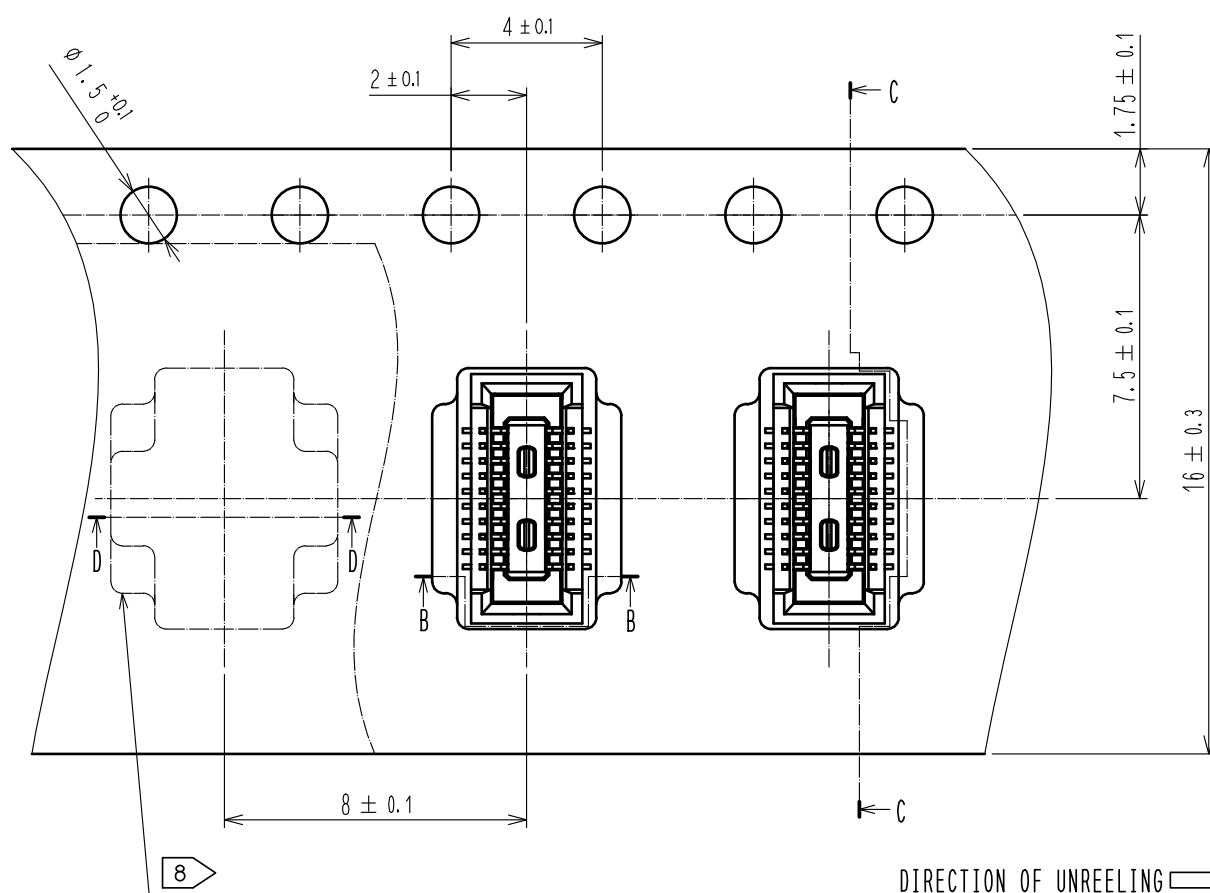


C-C

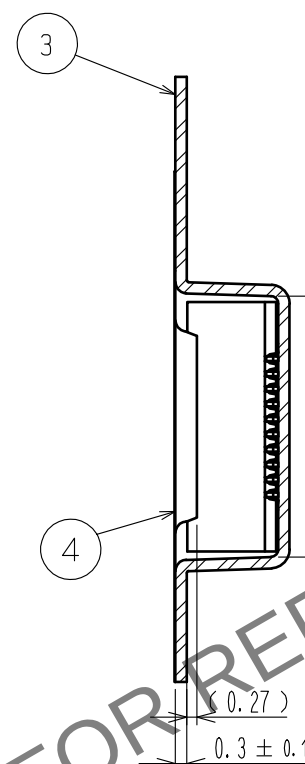

STYLE AND DIMENSION OF REEL(FREE)

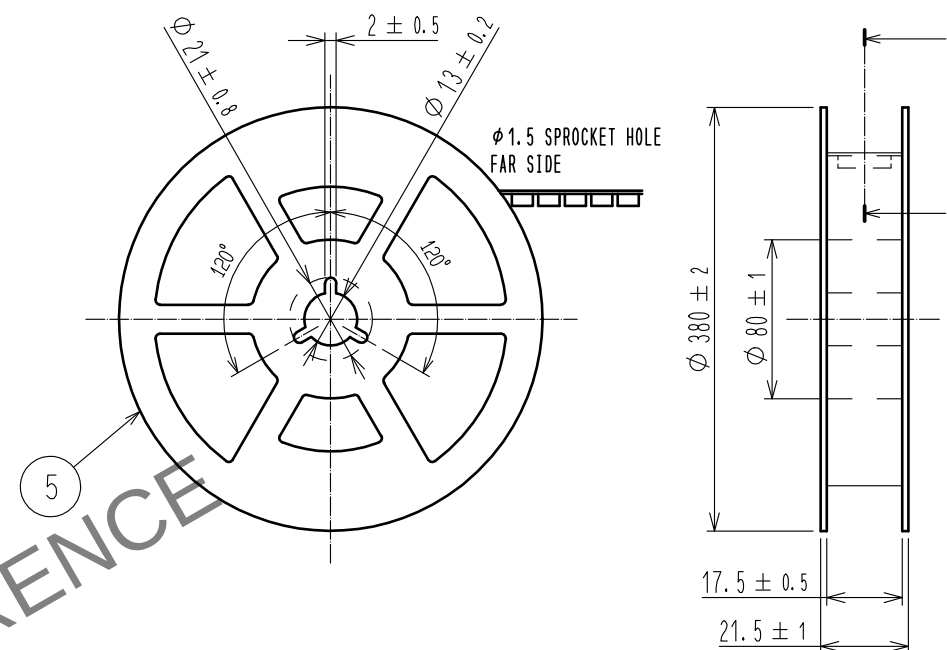

D-D(FREE)

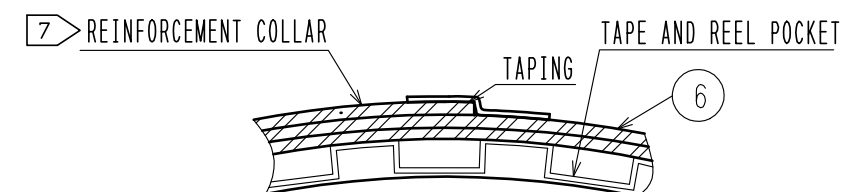

- NOTES
4. PER REEL 3000 CONNECTORS.
 5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 6. REFER TO JIS C 0806, IEC 60286-3 (PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 7. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.
 8. ONE OF SEVERAL IS DIFFERENT IN FROM OF THE EMBOSSED CARRIER TAPE TO AVOID BEING STUCK IN.

HRS

DRAWING NO.	EDC-389766-51-00
PART NO.	DF40TC(2.5)-20DS-0.4V(51)
CODE NO.	CL684-4280-0-51

2/2