




Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

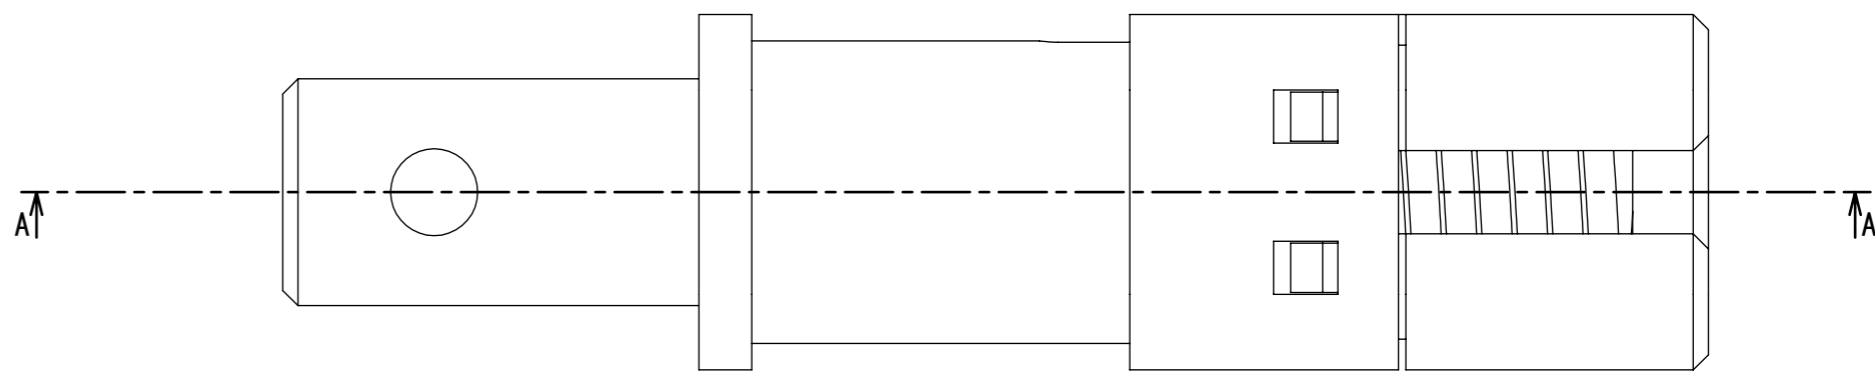

△ Front View

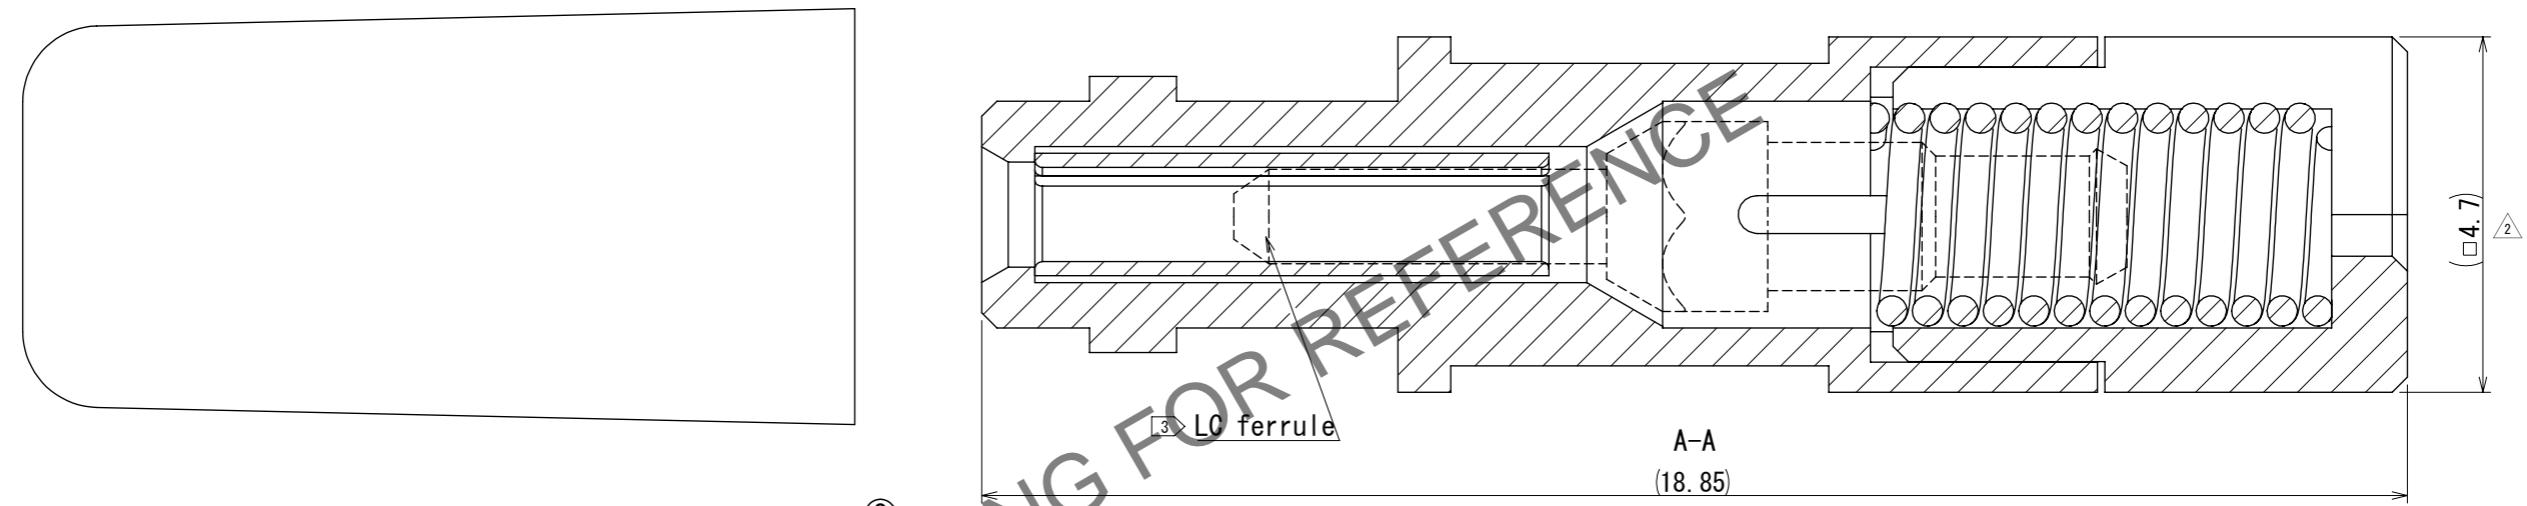

A-A
(18.85)

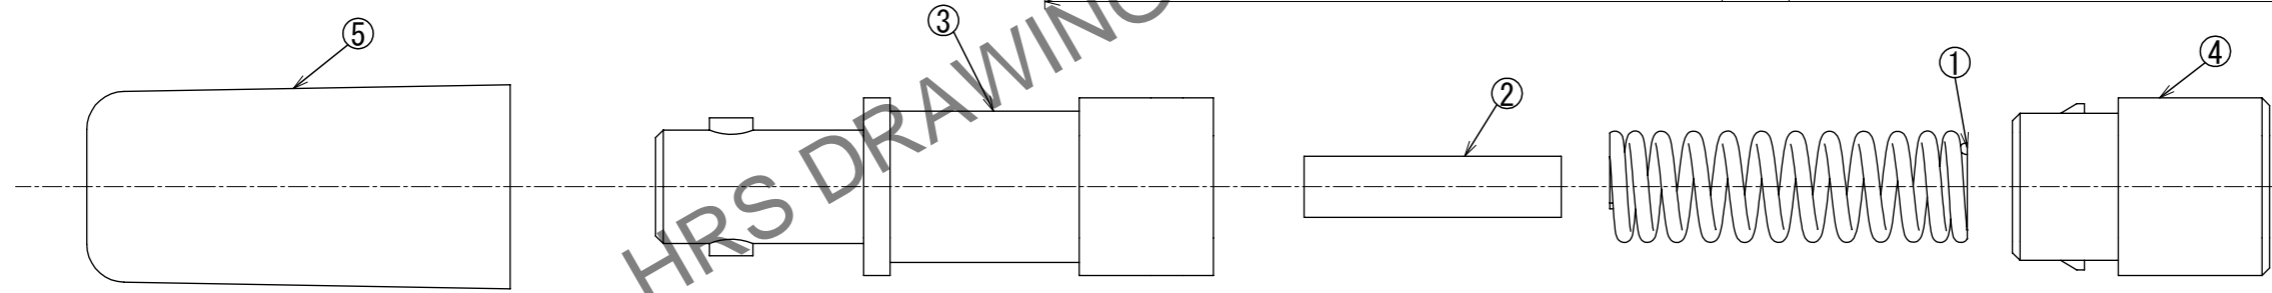


△ Parts Configuration Diagram
SCALE 5:1

Table1. Parts list

No.	Parts name	Details	NOTE
①	LC Spring	SUS304	-
②	Split sleeve	ZrO2	-
③	LC Coupling P1	PESU	-
④	LC Coupling P2	PESU	-
⑤	Cap	TPS	Color:Black

注 ① Table1 shows the parts list.
 2. No. ③ LC Coupling P1, ④ LC Coupling P2 may contain air bubbles in the resin and may vary in color, but this does not affect performance.
 ③ LC ferrules are not included in this product. Please purchase commercially available LC ferrules.
 4. Sales Unit : 200pcs
 △ 5. Front and A-A cross section show image view when assembled with LC ferrule.
 △ ⑥ This figure shows the difference in harness dimensions before and after assembly of this product.

△ ⑥ Dimension between LC Coupling P1 Edge and LC Ferrule End-Face



UNITS mm	SCALE 10:1	COUNT 6	DESCRIPTION OF REVISIONS DIS-K-00010334	DESIGNED	CHECKED	DATE
				SI. MATSUMOTO	SJ. SUZUKI	2024. 03. 01
HIROSE ELECTRIC CO., LTD.	APPROVED : YY. HIYAMA	2023. 09. 15	DRAWING NO.	EDC-401255-00-00		
	CHECKED : TS. YAMAZAKI	2023. 09. 15	PART NO.	FJ-L-P-KT1		
	DESIGNED : SI. MATSUMOTO	2023. 09. 15	CODE NO.	CL0719-1100-0-00		
	DRAWN : SK. AOYAMA	2023. 09. 15				