

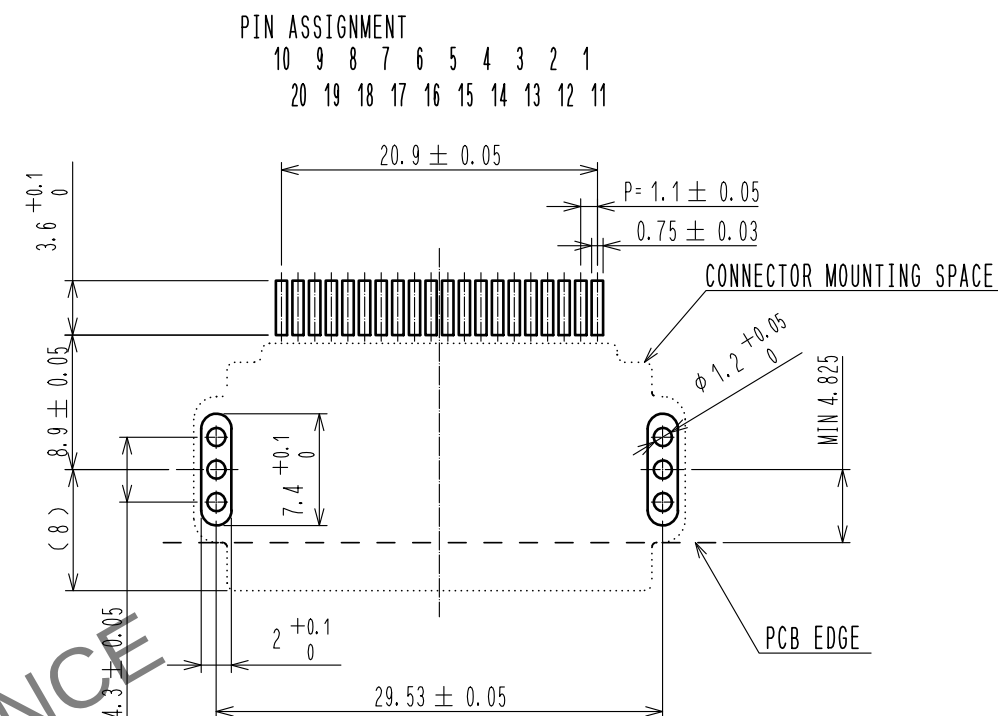
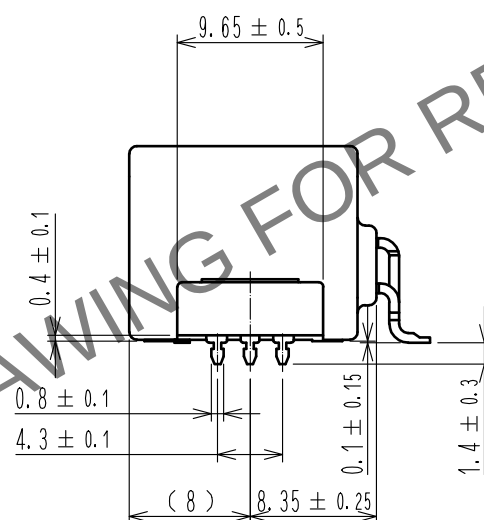


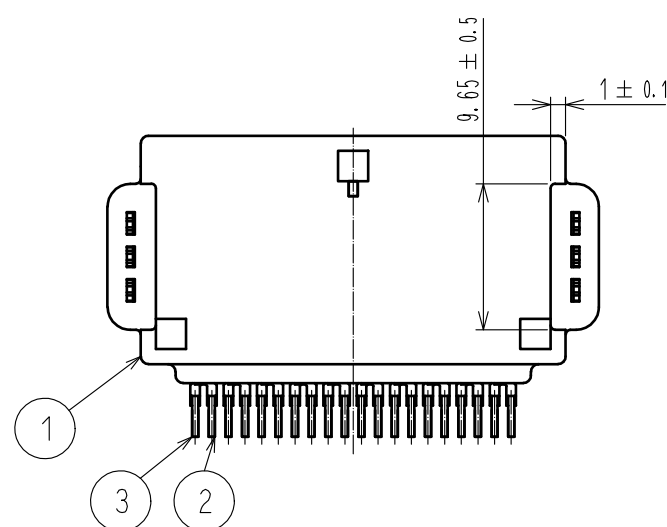

RECOMMENDED PCB PATTERN


5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

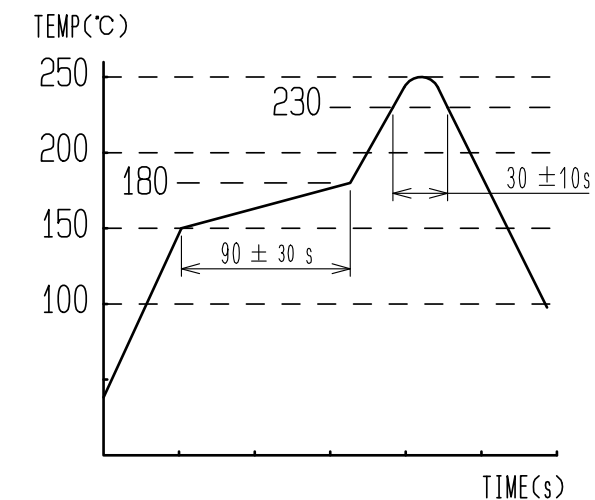


3	BRASS	TIN PLATED T=0.64	6	PET					
2	BRASS	TIN PLATED T=0.64	5	PS					
1	PPS	BLACK	4	BRASS	TIN PLATED T=0.4				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED		AR. SHIRAI		16.09.09		DRAWING NO.	EDC-358751-99-00	
	CHECKED		HS. OZAWA		16.09.09			PART NO.	GT25H2-20DP-2. 2H<99>
	DESIGNED		TK. SHISHIKURA		16.09.09		CODE NO.		CL775-0080-0-99
	DRAWN		TK. SHISHIKURA		16.09.09				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PACKAGING SPECIFICATION

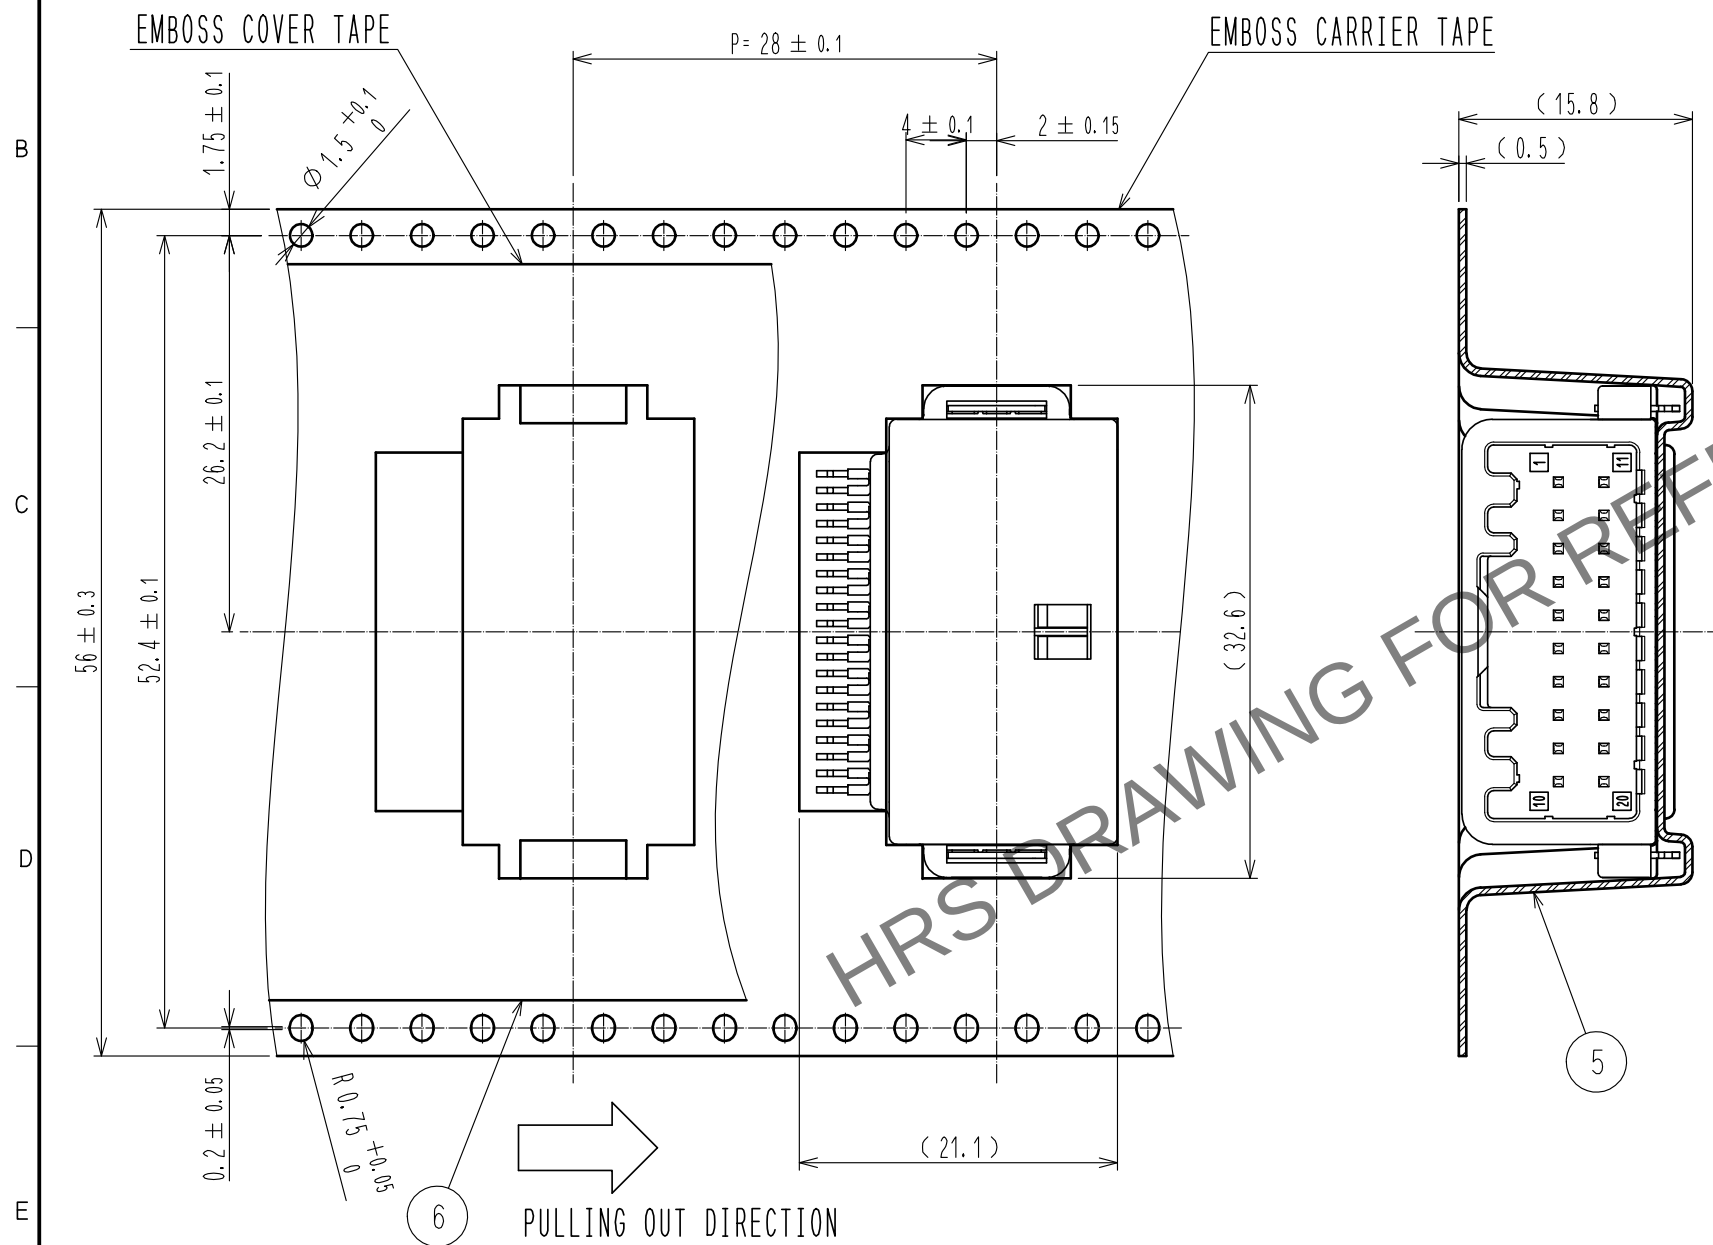

REEL DIMENSION(FREE)

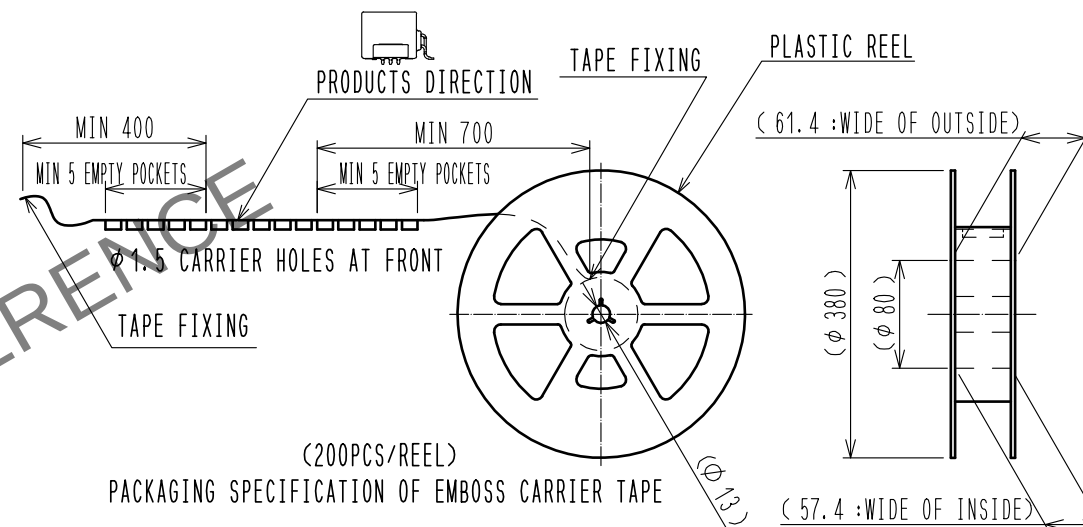

CARDBOARD DIMENSION(FREE)

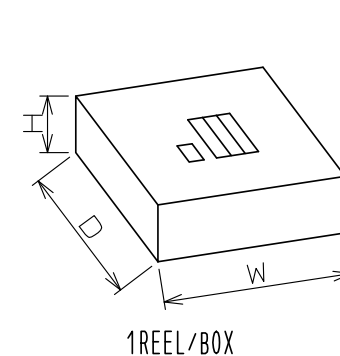

BOX SIZE

W=(405) (mm)

D=(405) (mm)

H=(63) (mm)

HRS

DRAWING NO.	EDC-358751-99-00
PART NO.	GT25H2-20DP-2.2H(99)
CODE NO.	CL775-0080-0-99

2/2