


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

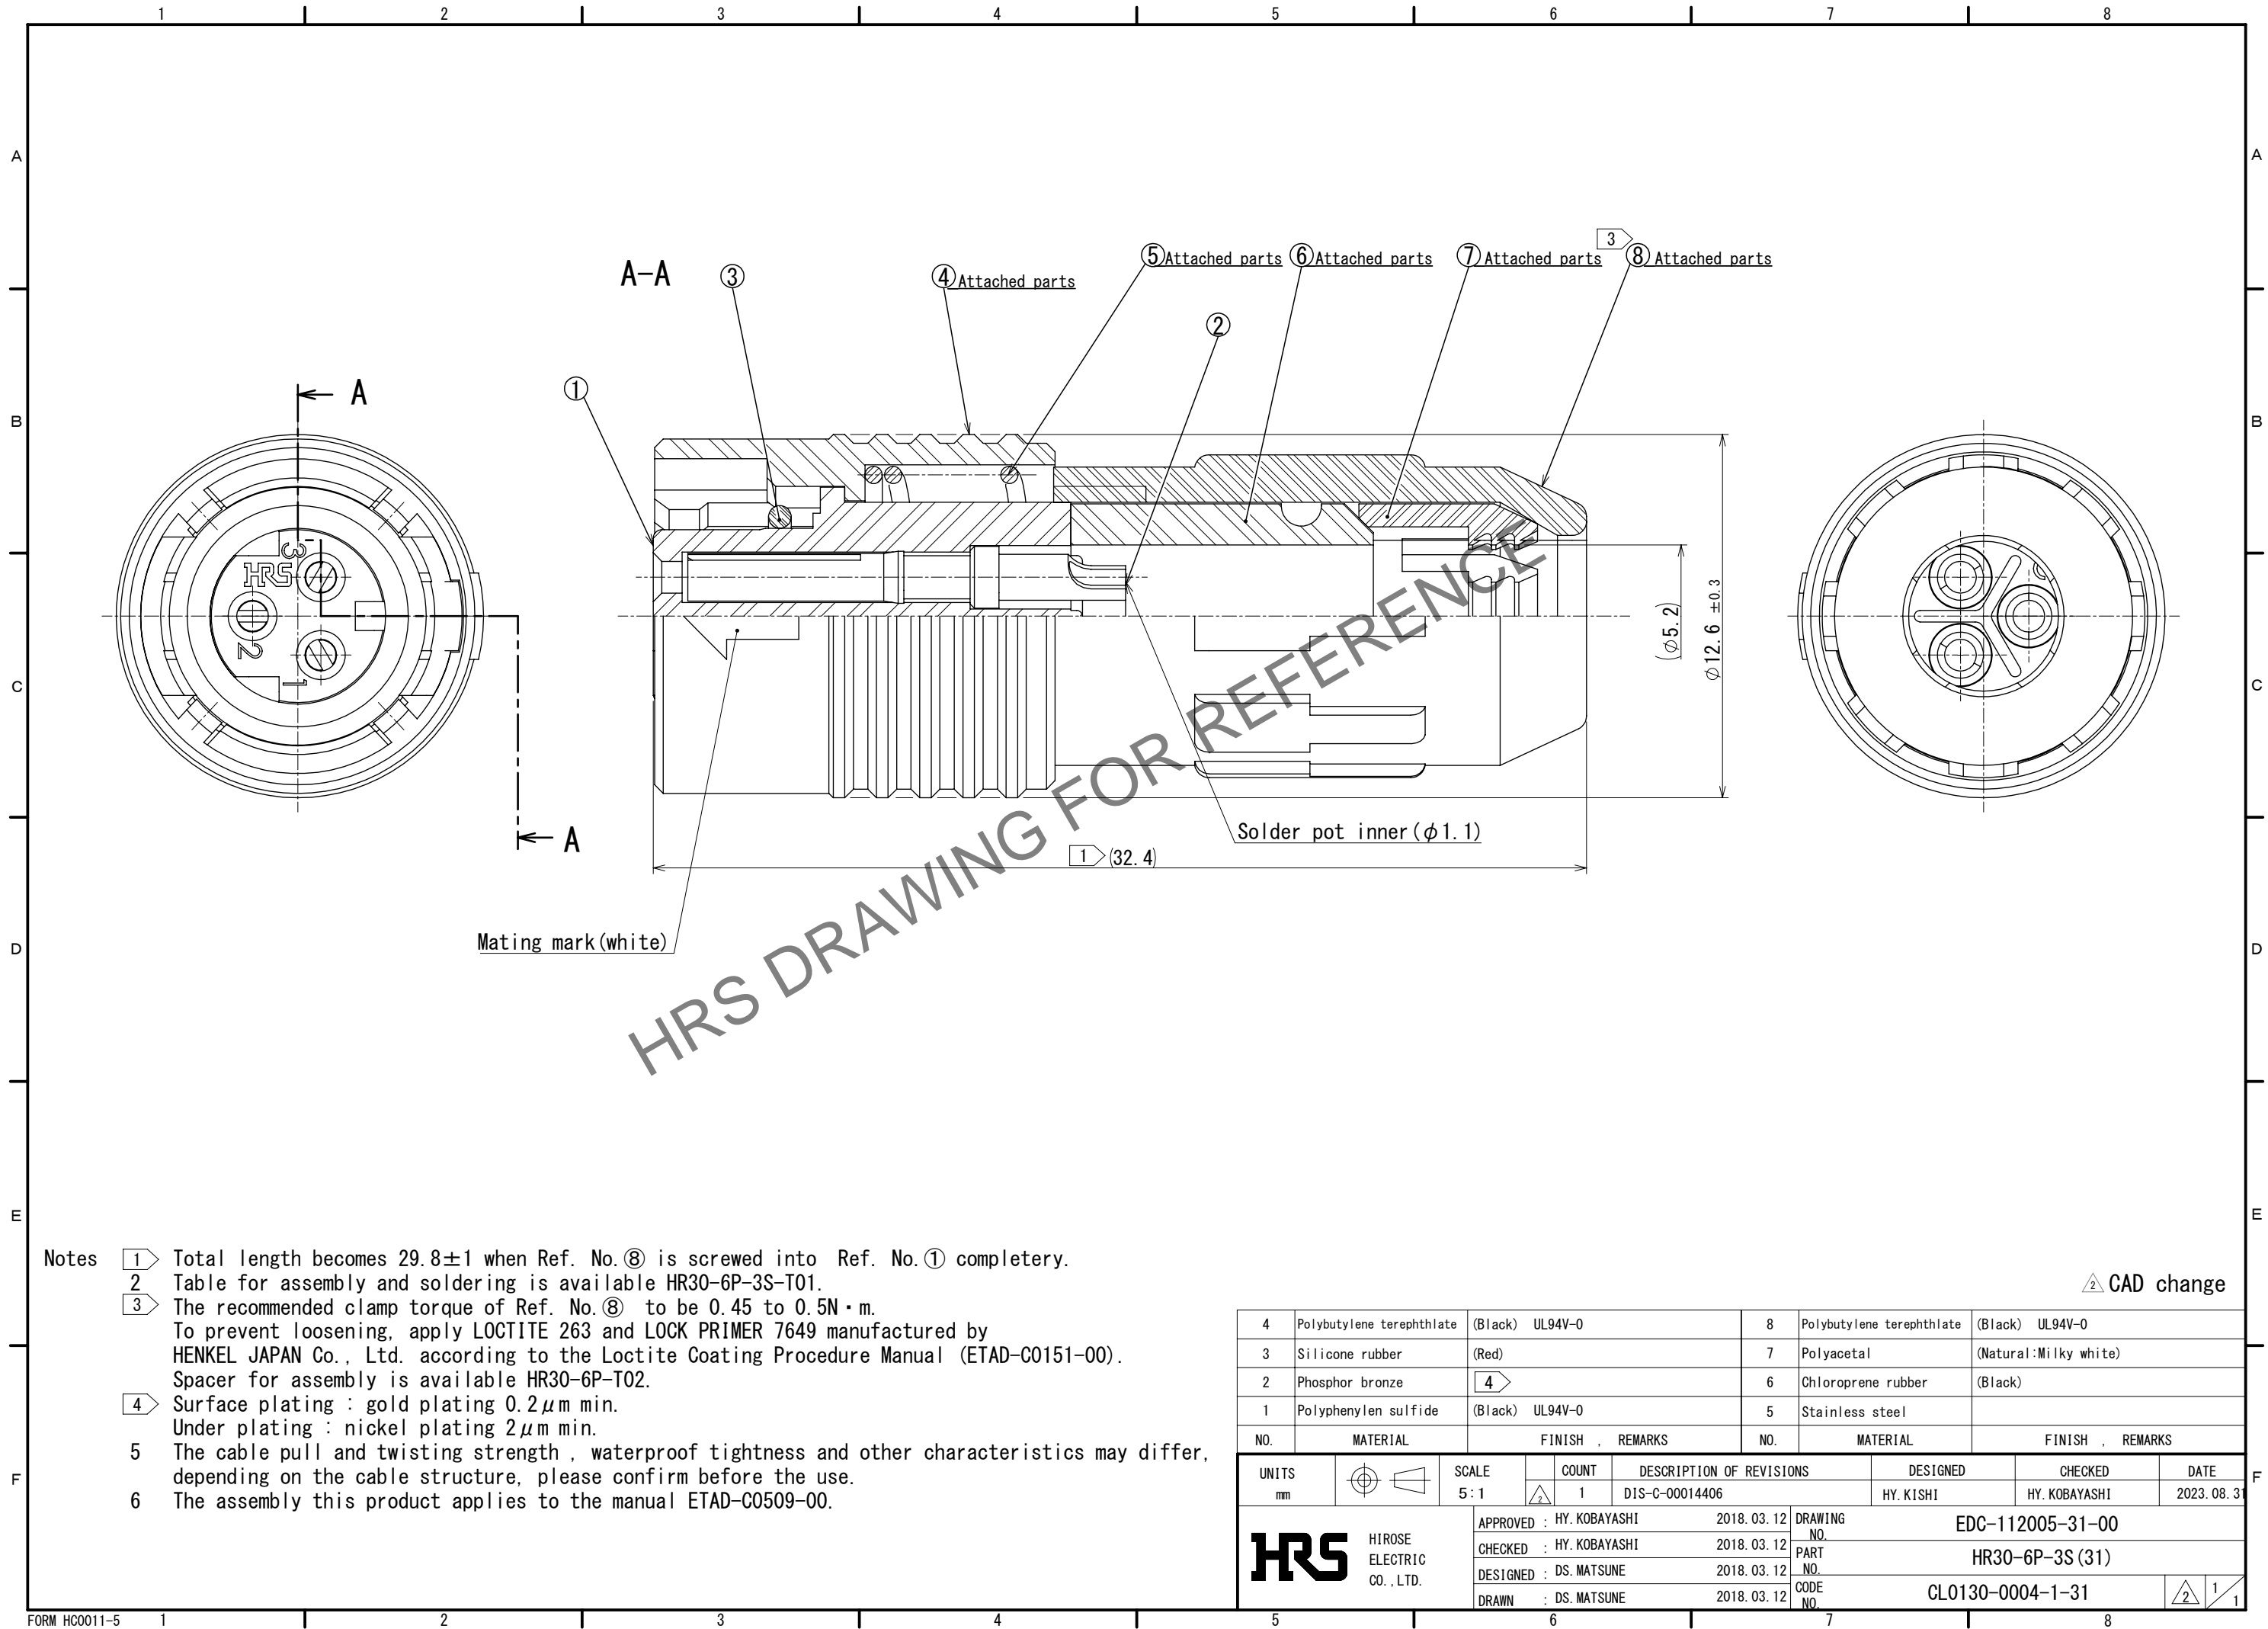

- Notes
- 1 Total length becomes  $29.8 \pm 1$  when Ref. No. ⑧ is screwed into Ref. No. ① completely.
  - 2 Table for assembly and soldering is available HR30-6P-3S-T01.
  - 3 The recommended clamp torque of Ref. No. ⑧ to be  $0.45$  to  $0.5N \cdot m$ .  
To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).  
Spacer for assembly is available HR30-6P-T02.
  - 4 Surface plating : gold plating  $0.2 \mu m$  min.  
Under plating : nickel plating  $2 \mu m$  min.
  - 5 The cable pull and twisting strength , waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
  - 6 The assembly this product applies to the manual ETAD-C0509-00.

△ CAD change

4	Polybutylene terephthlate	(Black) UL94V-0	8	Polybutylene terephthlate	(Black) UL94V-0
3	Silicone rubber	(Red)	7	Polyacetal	(Natural:Milky white)
2	Phosphor bronze	4	6	Chloroprene rubber	(Black)
1	Polyphenylen sulfide	(Black) UL94V-0	5	Stainless steel	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00014406	DESIGNED HY. KISHI
		APPROVED : HY. KOBAYASHI 2018. 03. 12		DRAWING NO. EDC-112005-31-00	
		CHECKED : HY. KOBAYASHI 2018. 03. 12		PART NO. HR30-6P-3S (31)	
		DESIGNED : DS. MATSUNE 2018. 03. 12		CODE NO. CL0130-0004-1-31	
		DRAWN : DS. MATSUNE 2018. 03. 12			
				DATE 2023. 08. 31	