


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

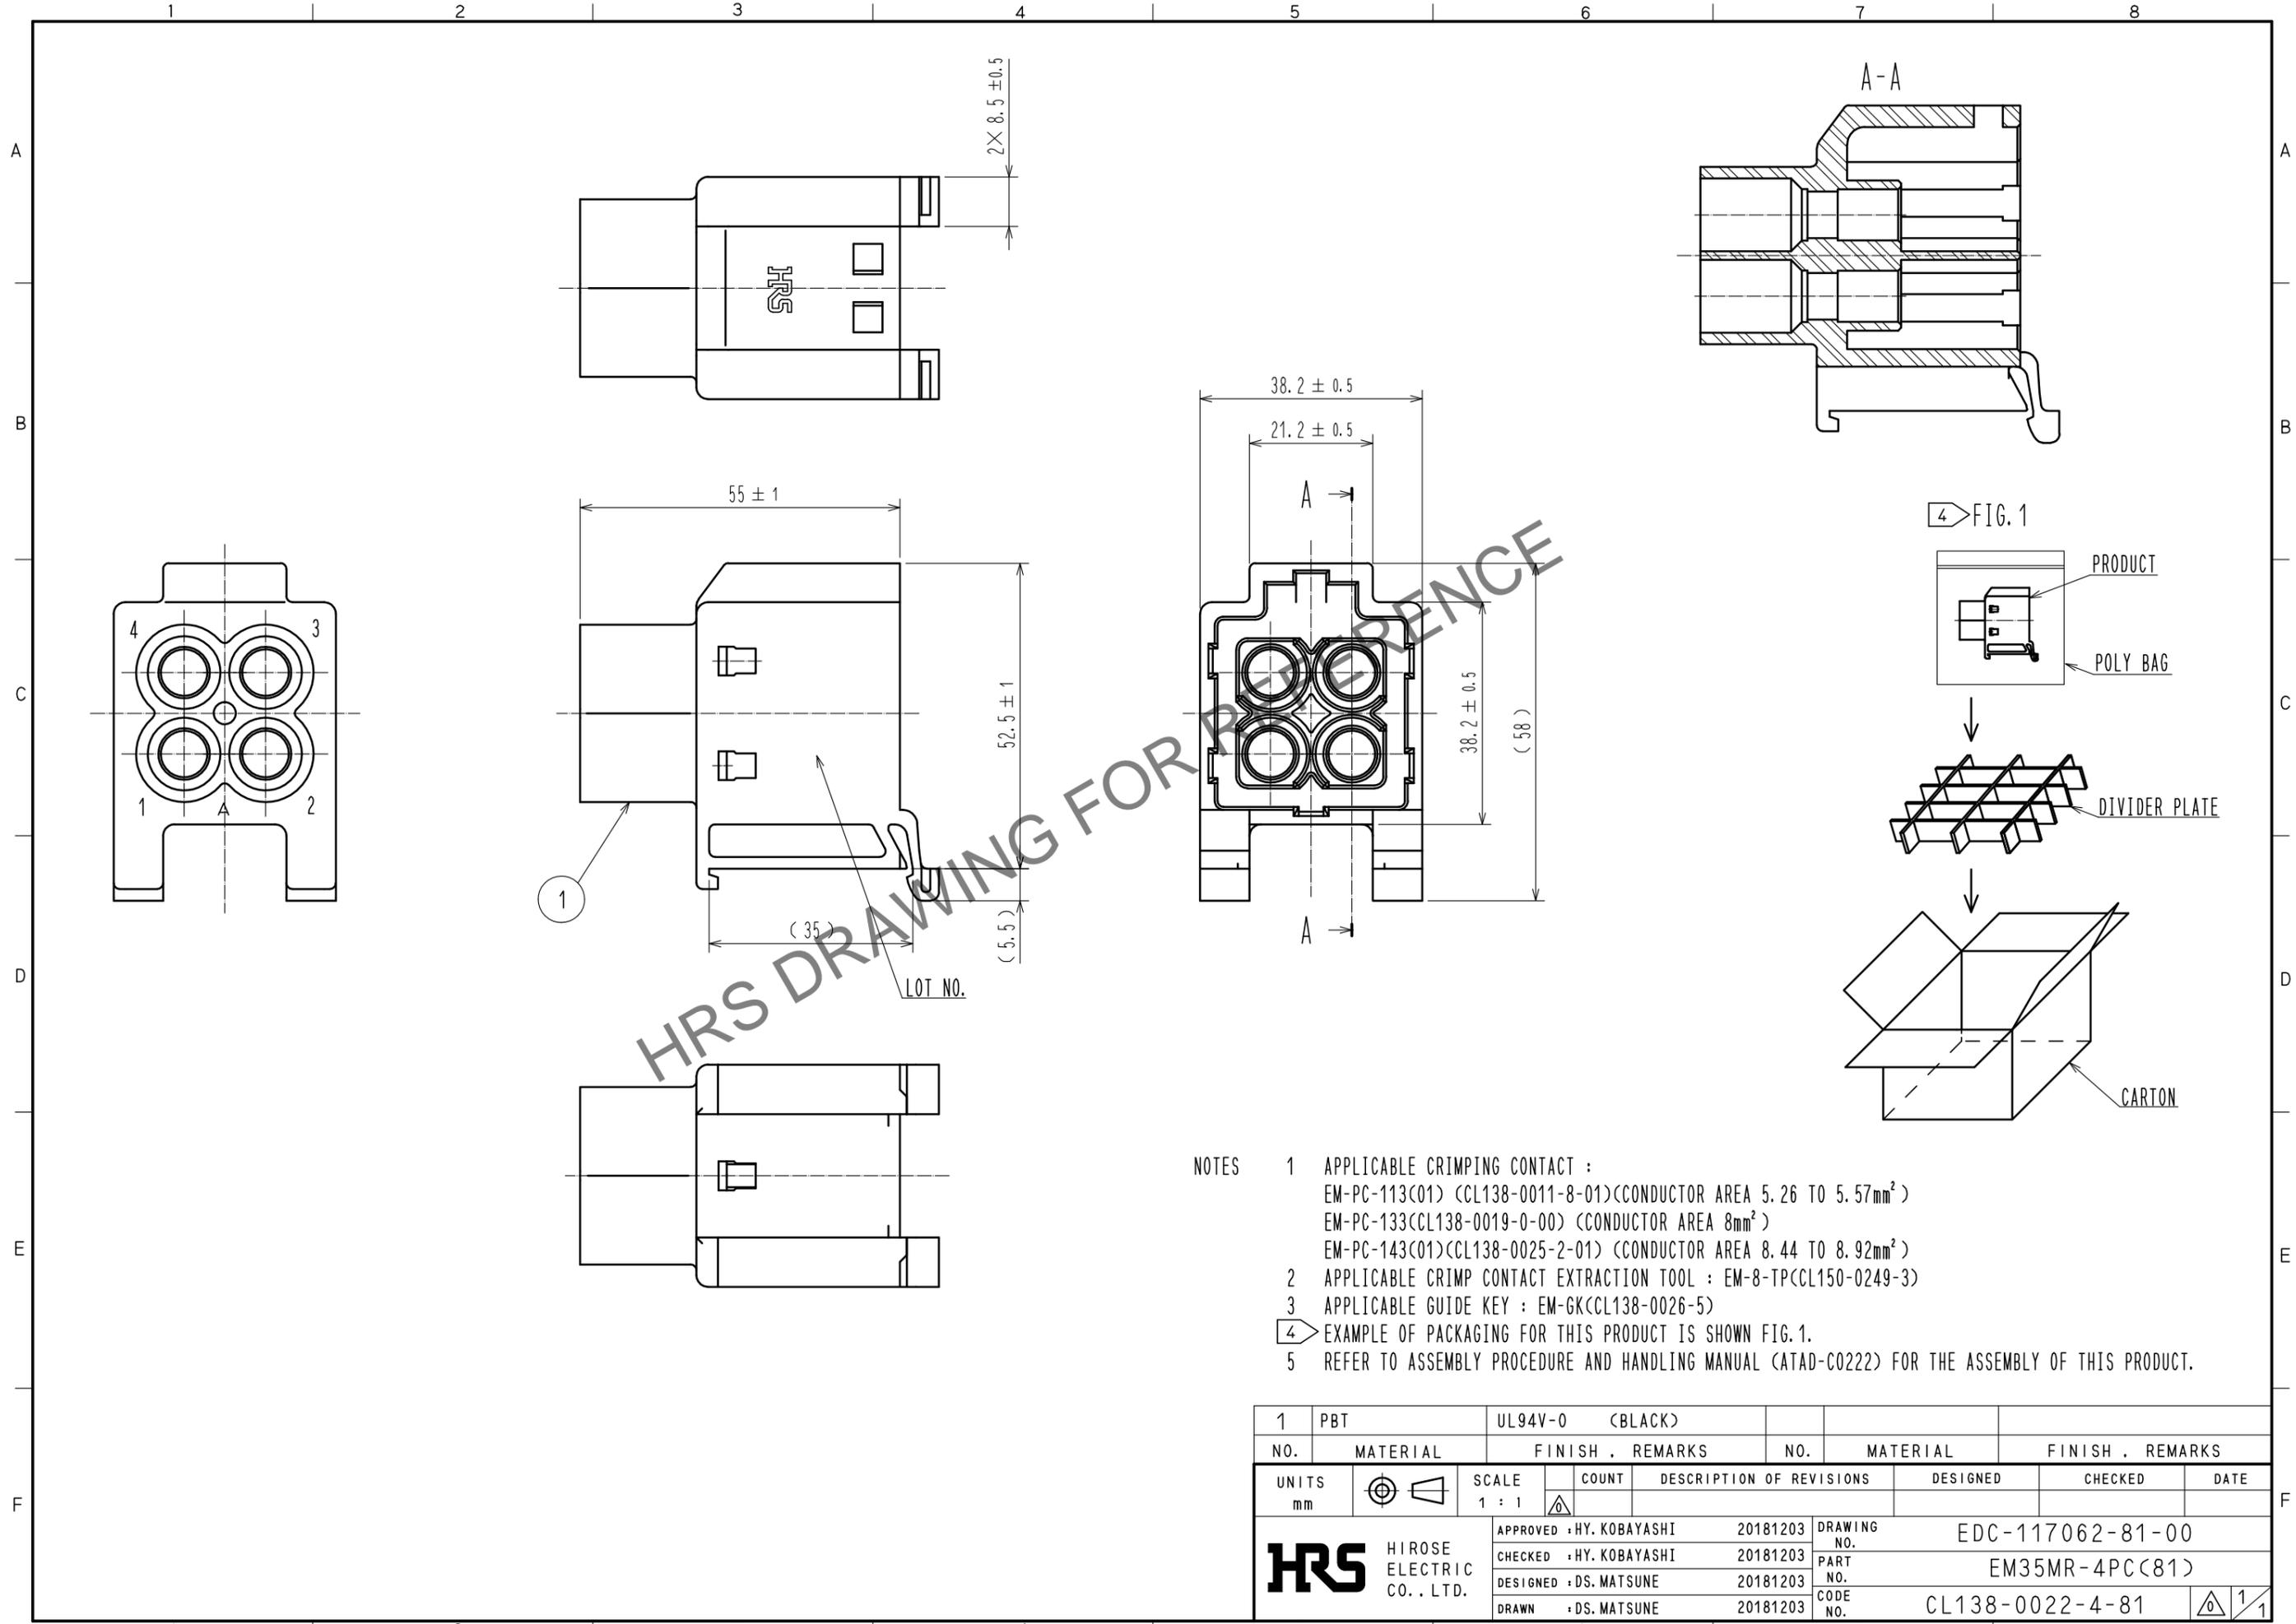

- NOTES
- 1 APPLICABLE CRIMPING CONTACT :
EM-PC-113(C01) (CL138-0011-8-01) (CONDUCTOR AREA 5.26 TO 5.57mm²)
EM-PC-133(CCL138-0019-0-00) (CONDUCTOR AREA 8mm²)
EM-PC-143(C01)(CL138-0025-2-01) (CONDUCTOR AREA 8.44 TO 8.92mm²)
 - 2 APPLICABLE CRIMP CONTACT EXTRACTION TOOL : EM-8-TP(CCL150-0249-3)
 - 3 APPLICABLE GUIDE KEY : EM-GK(CCL138-0026-5)
 - 4 EXAMPLE OF PACKAGING FOR THIS PRODUCT IS SHOWN FIG. 1.
 - 5 REFER TO ASSEMBLY PROCEDURE AND HANDLING MANUAL (ATAD-C0222) FOR THE ASSEMBLY OF THIS PRODUCT.

1	PBT	UL94V-0 (BLACK)					
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 1 : 1		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	20181203	DRAWING NO.	EDC-117062-81-00		
		CHECKED : HY. KOBAYASHI	20181203	PART NO.	EM35MR-4PC(81)		
		DESIGNED : DS. MATSUNE	20181203	CODE NO.	CL138-0022-4-81		
		DRAWN : DS. MATSUNE	20181203				