


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

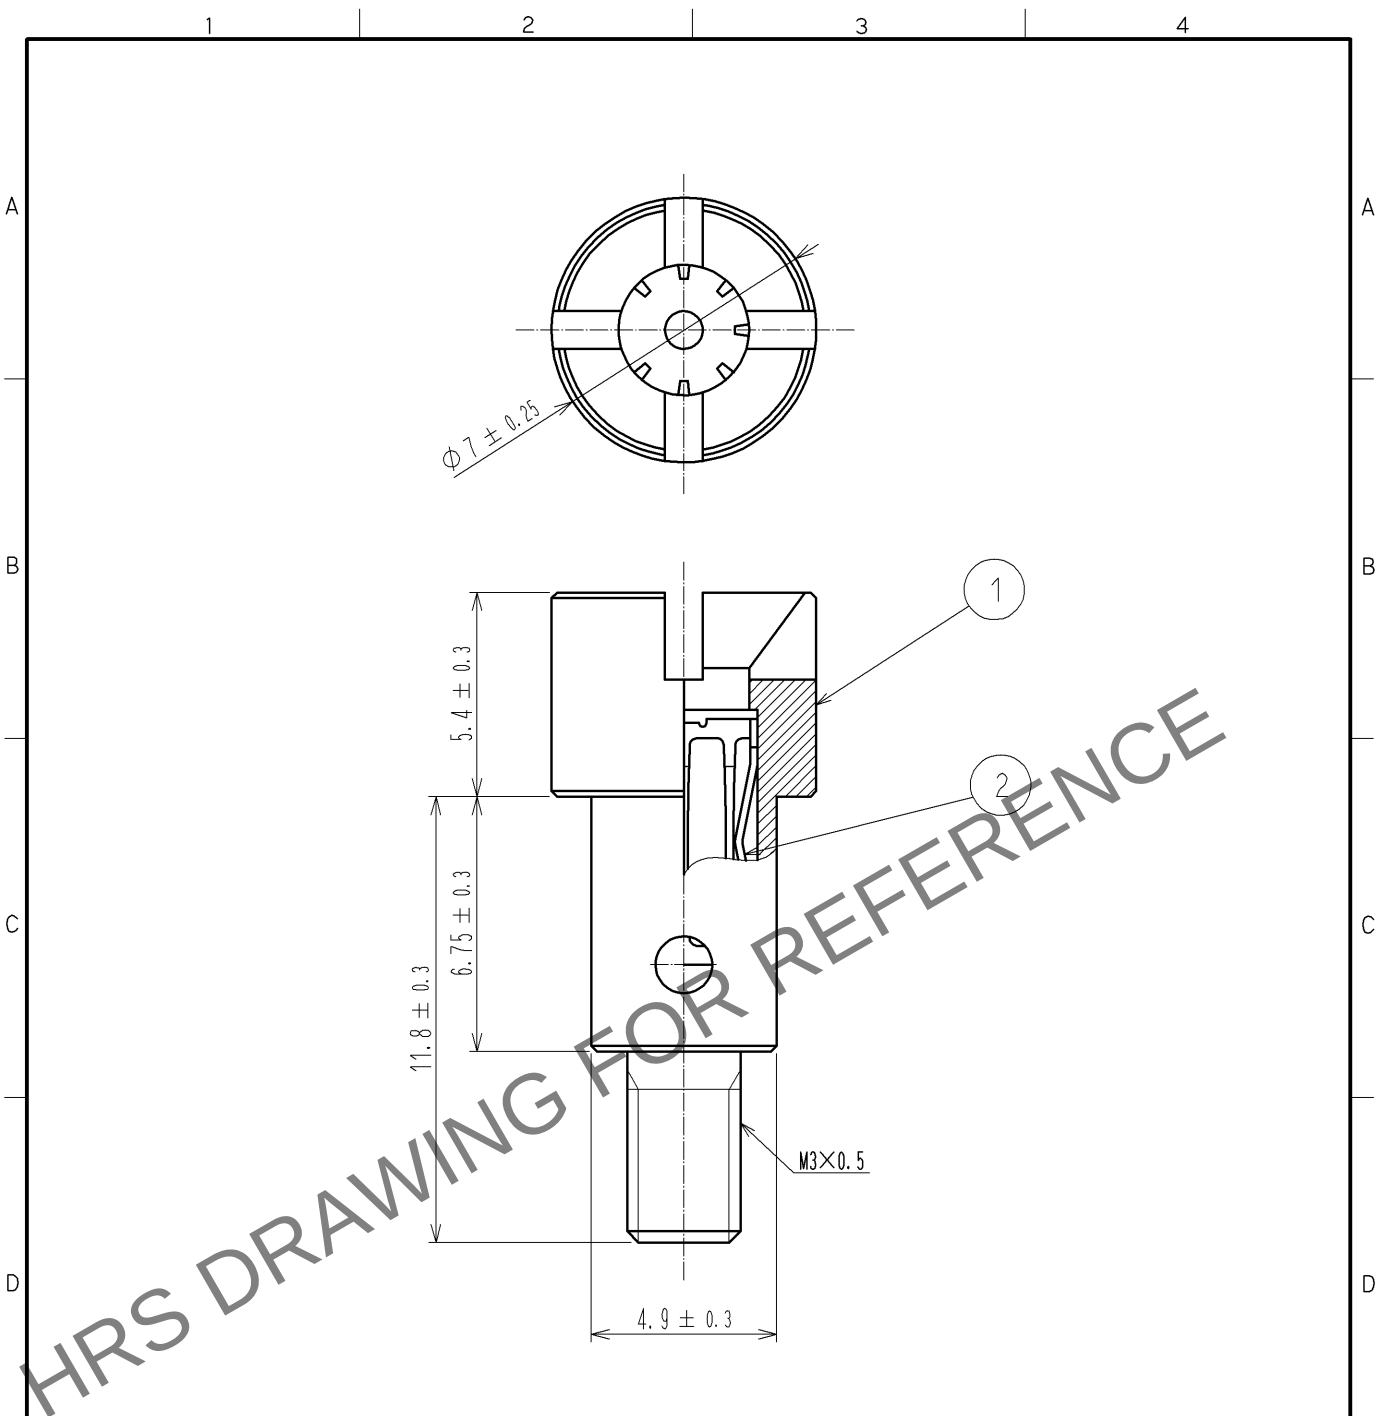

- NOTE 1. 1 PAKKING : 2 PCS.  
2. THE RECOMMENDED TIGHTENING TORQUE TO BE 0.63 N・m.

|                           |          |                                                                 |            |                            |                  |         |      |
|---------------------------|----------|-----------------------------------------------------------------|------------|----------------------------|------------------|---------|------|
| 1                         | BRASS    | UNDER PLATING: COPPER 1μm MIN.<br>OVER PLATING: NICKEL 2μm MIN. | 2          | STAINLESS STEEL            | NICKEL 1μm MIN.  |         |      |
| NO.                       | MATERIAL | FINISH , REMARKS                                                | NO.        | MATERIAL                   | FINISH , REMARKS |         |      |
| UNITS<br>mm               |          | SCALE<br>5 : 1                                                  | COUNT<br>  | DESCRIPTION OF REVISIONS   | DESIGNED         | CHECKED | DATE |
| HIROSE ELECTRIC CO., LTD. |          | APPROVED : RI. TAKAYASU                                         | 12. 08. 23 | DRAWING NO. EDC4-127152-00 |                  |         |      |
|                           |          | CHECKED : EJ. WAKATSUKI                                         | 12. 08. 23 | PART NO. EX-SG             |                  |         |      |
|                           |          | DESIGNED : MO. SHIMOYAMA                                        | 12. 08. 23 | CODE NO. CL232-0630-0-00   |                  |         |      |
|                           |          | DRAWN : MO. SHIMOYAMA                                           | 12. 08. 23 | 1/1                        |                  |         |      |