

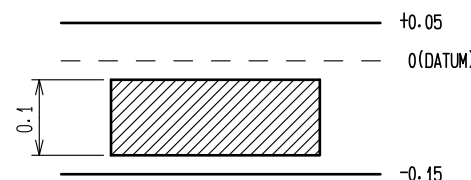
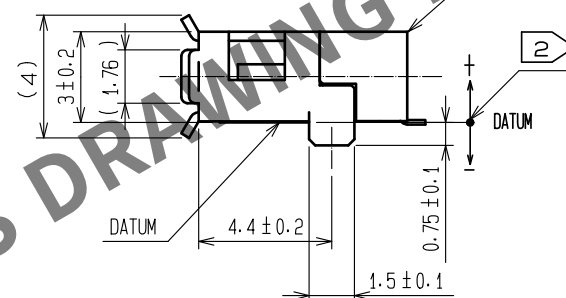
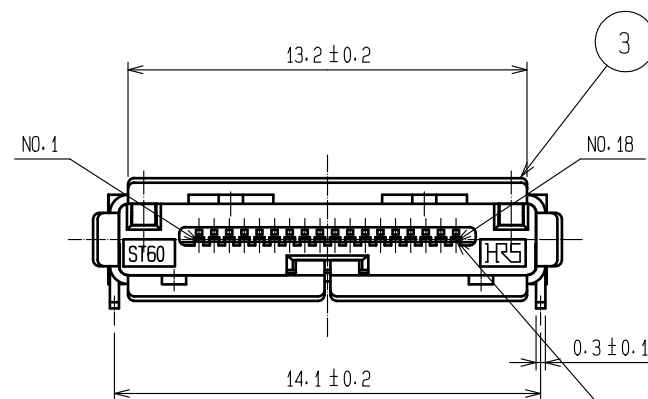


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

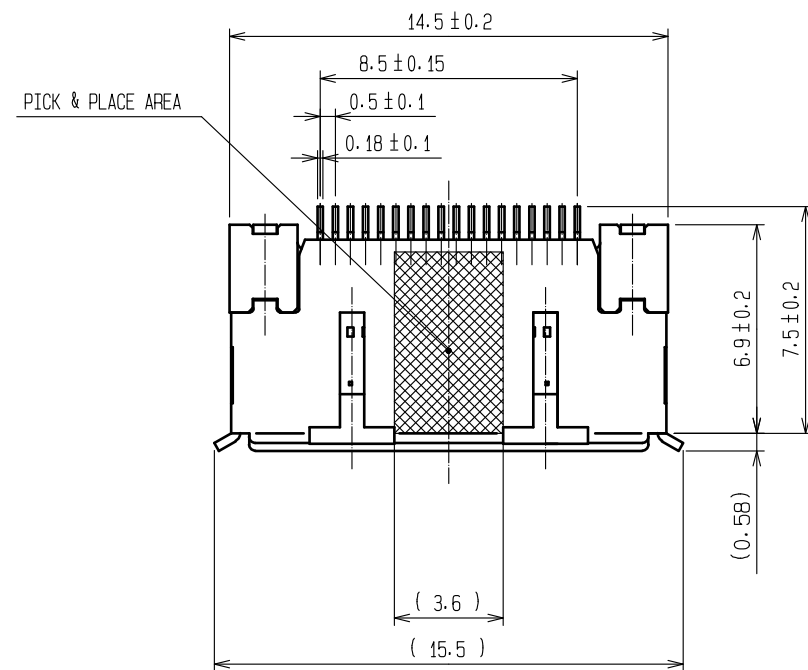

PATTERN OF MOUNTING PLUG (2:1)

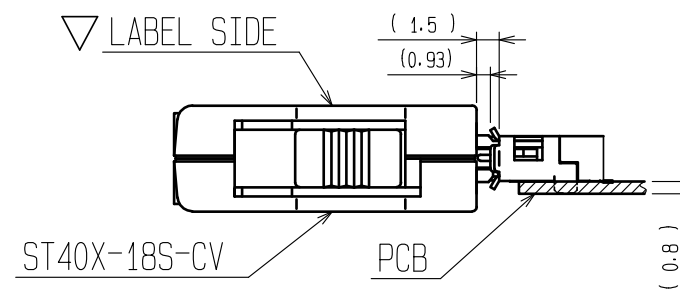

RECOMMENDED PC BOARD HOLE PATTERN (2:1)



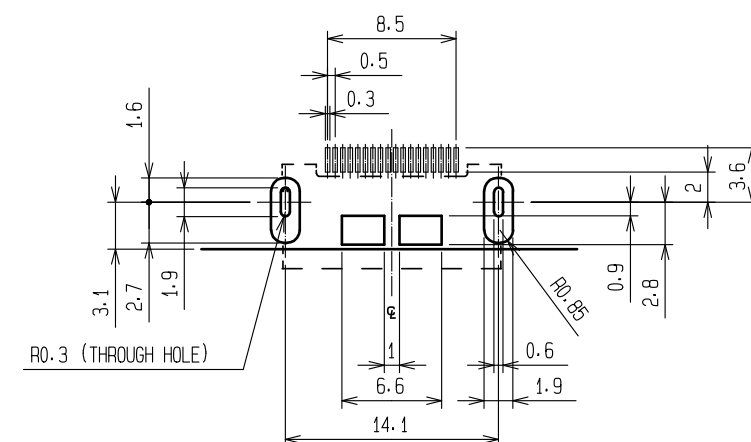


FIGURE FOR PAKAGING (FREE)

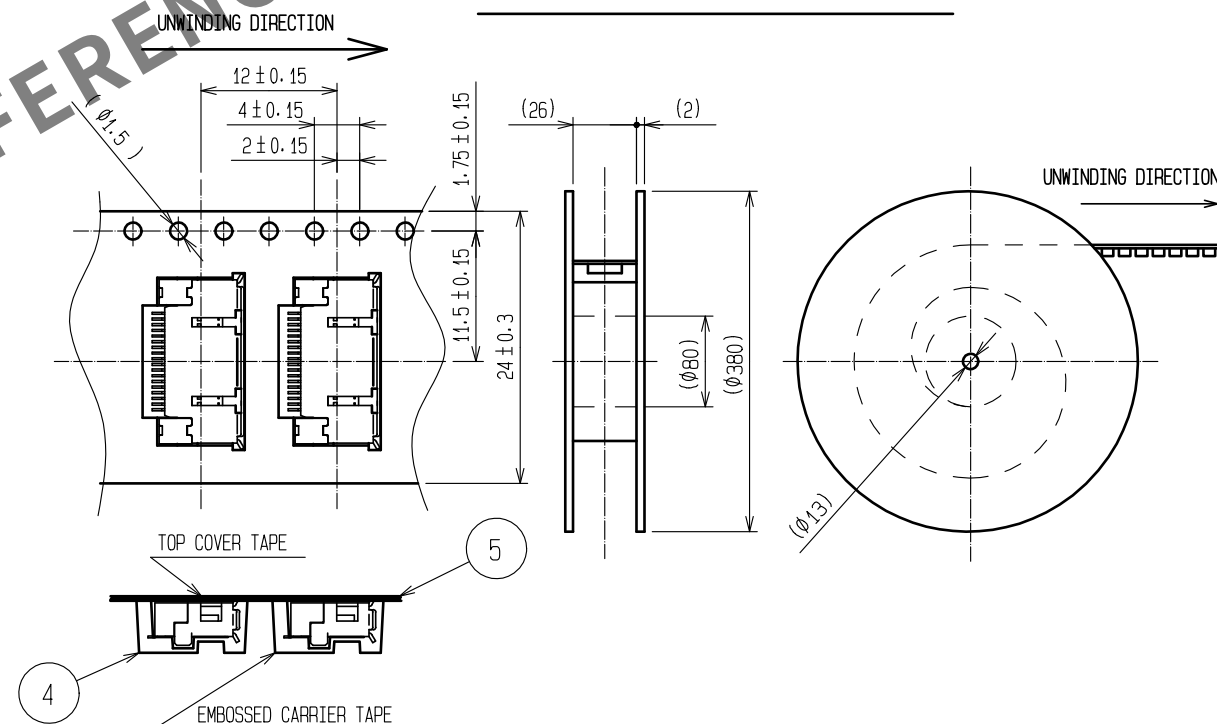

- NOTE 1 1REEL:1500 PIECES.
1REEL CONSISTS OF 1500 PIECES FOR SALE.
- 2 CO-PLANARITY SPECIFICATION AS FIG SHOWN IN THE RIGHT.
- 3 PLATING
CONTACT AREA GOLD 0.2μm min.
LEAD AREA GOLD FLASH.
UNDER PLATING NICKEL 2μm.
- 4 PLATING
SURFACE AREA TIN 2μm min.
UNDER PLATING NICKEL 0.2μm min.

			5		PS		TOP COVER TAPE										
2		COPPER ALLOY		3													
1		LCP-M		BLACK		4		PS		EMBOSSED CARRIER TAPE							
3		STAINLESS STEEL		4													
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 4 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : MN. KENJO		20220426		DRAWING NO.		EDC-123731-30-09									
		CHECKED : KG. OKITA		20220422		PART NO.		ST60-18P(30)									
		DESIGNED : MO. SHIMOYAMA		20220422		CODE NO.		CL0241-0011-9-30									
		DRAWN : MO. SHIMOYAMA		20220422				 1									