


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

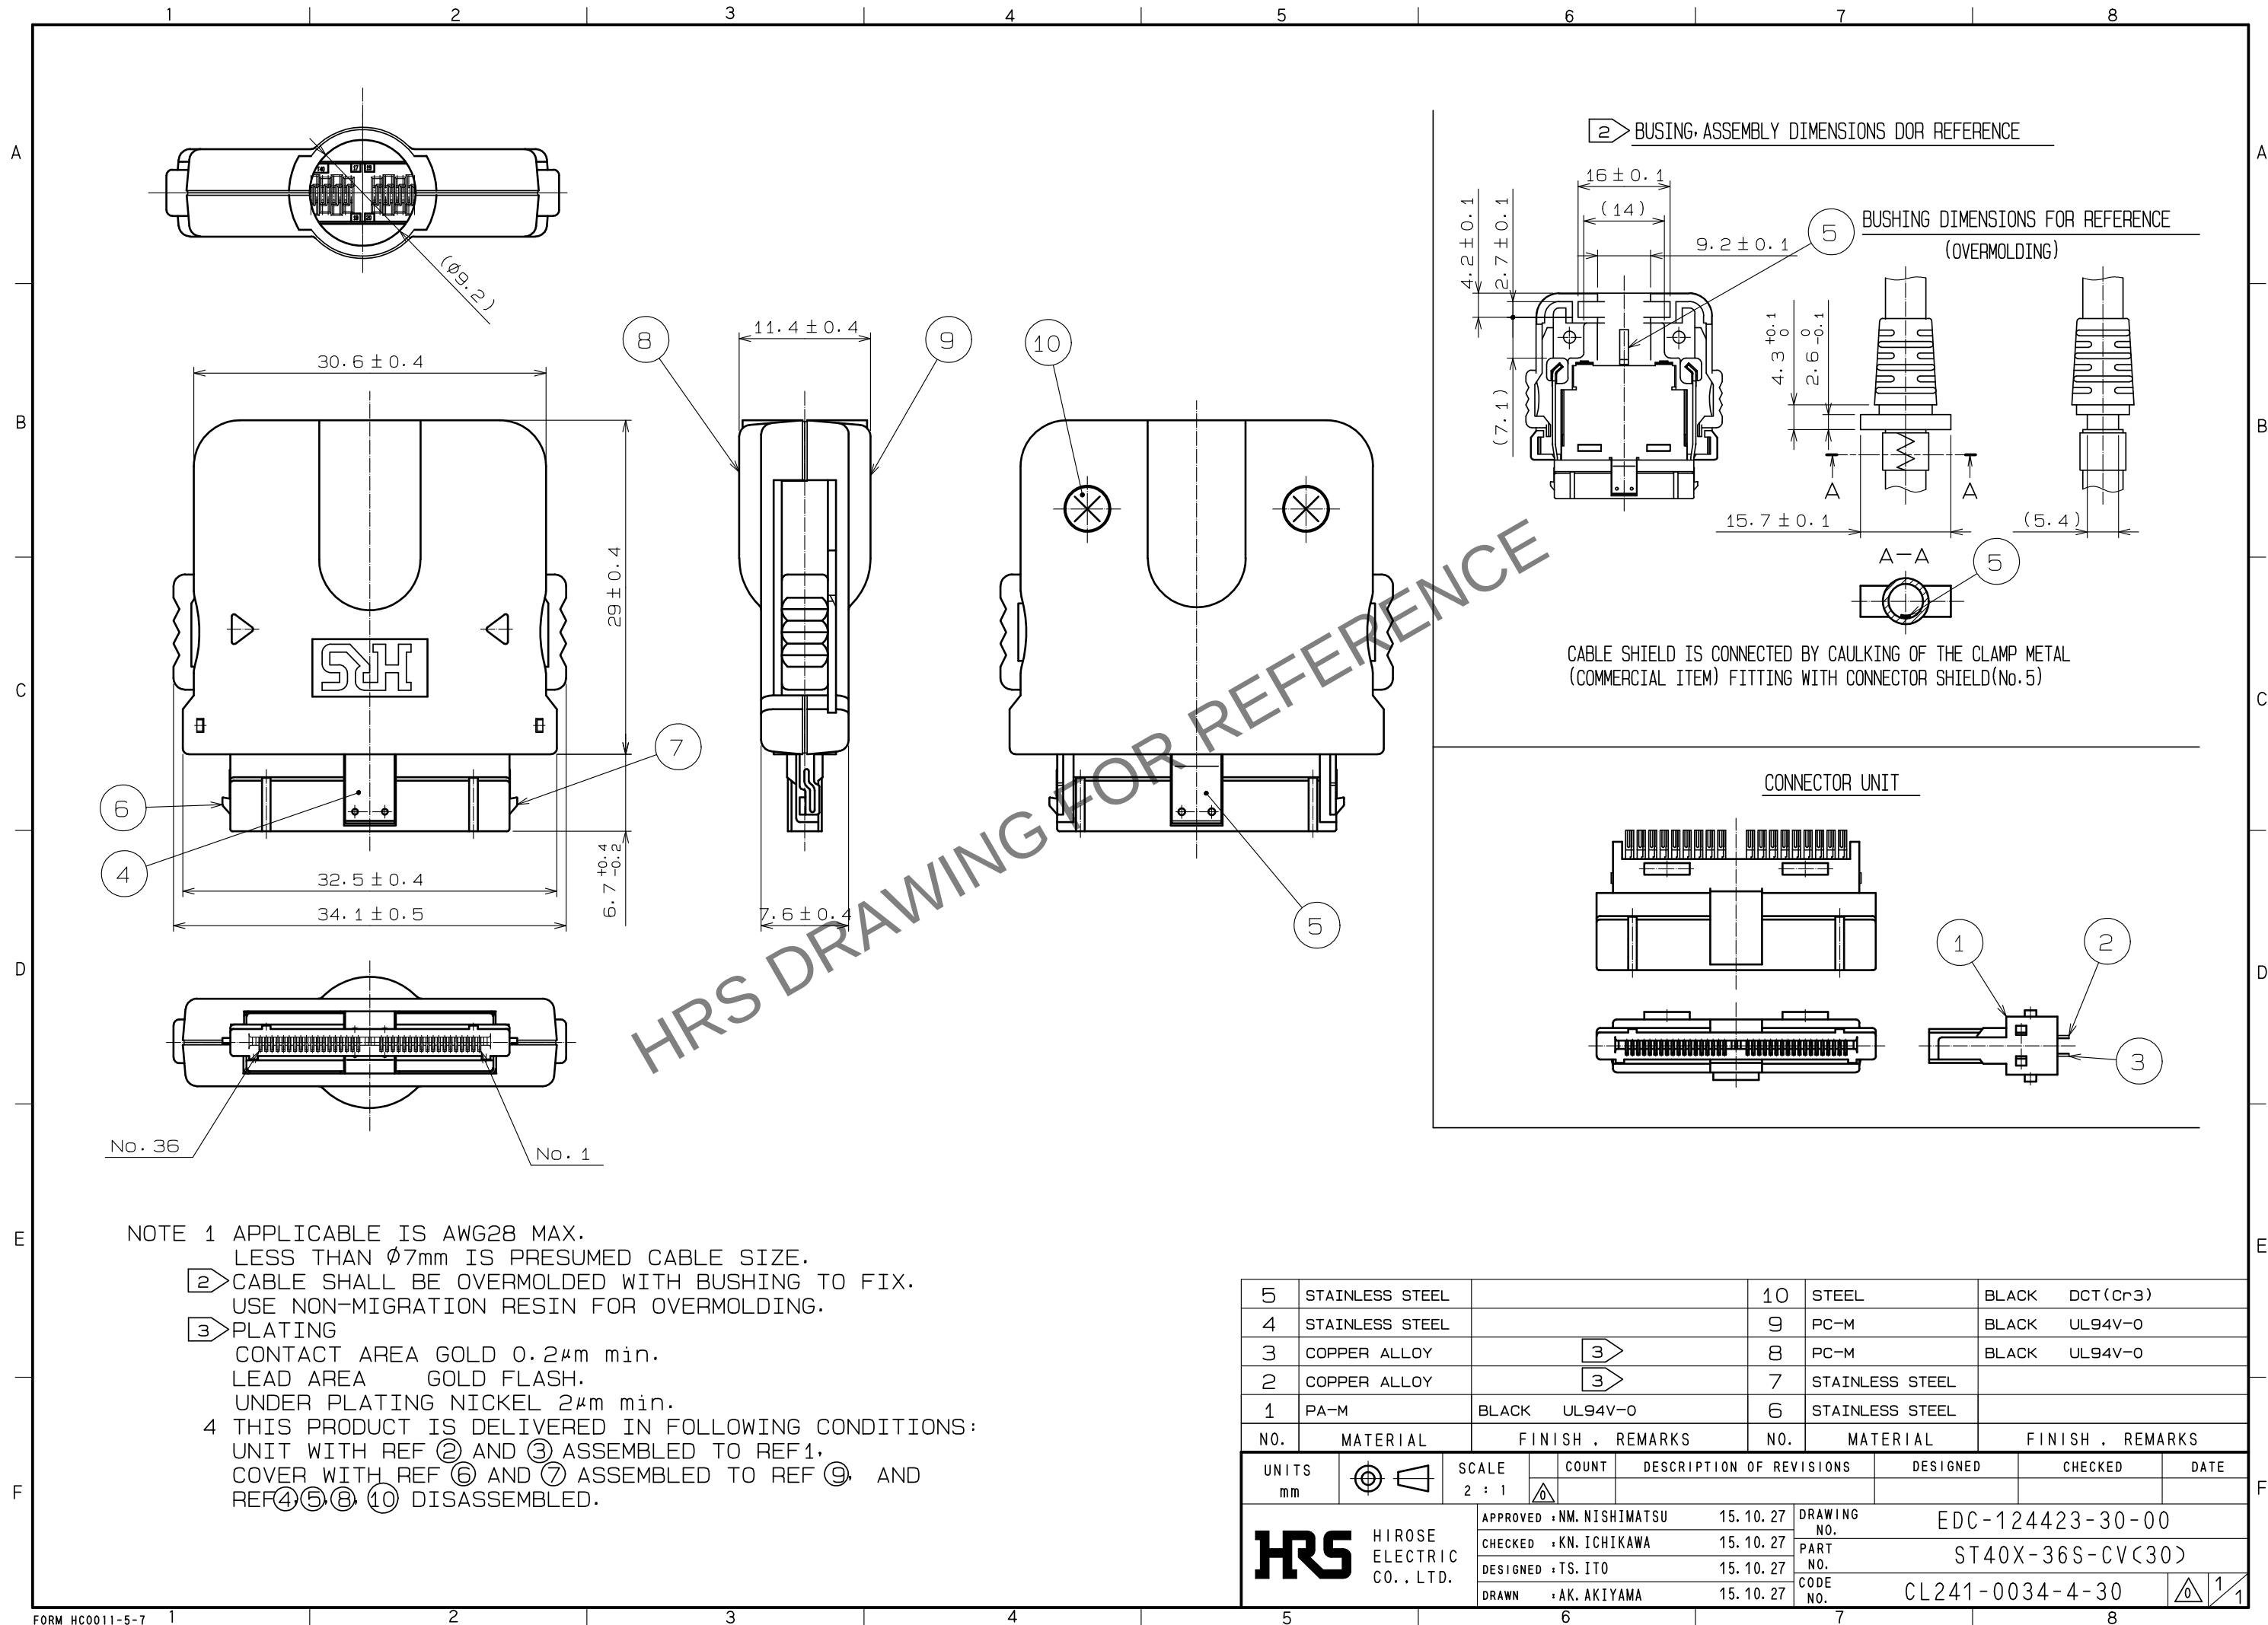

NOTE 1 APPLICABLE IS AWG28 MAX.
LESS THAN $\phi 7\text{mm}$ IS PRESUMED CABLE SIZE.
2 CABLE SHALL BE OVERMOLDED WITH BUSHING TO FIX.
USE NON-MIGRATION RESIN FOR OVERMOLDING.
3 PLATING
CONTACT AREA GOLD $0.2\mu\text{m}$ min.
LEAD AREA GOLD FLASH.
UNDER PLATING NICKEL $2\mu\text{m}$ min.
4 THIS PRODUCT IS DELIVERED IN FOLLOWING CONDITIONS:
UNIT WITH REF 2 AND 3 ASSEMBLED TO REF1.
COVER WITH REF 6 AND 7 ASSEMBLED TO REF 9, AND
REF4 5 8, 10 DISASSEMBLED.

5	STAINLESS STEEL		10	STEEL	BLACK DCT(Cr3)
4	STAINLESS STEEL		9	PC-M	BLACK UL94V-0
3	COPPER ALLOY	3	8	PC-M	BLACK UL94V-0
2	COPPER ALLOY	3	7	STAINLESS STEEL	
1	PA-M	BLACK UL94V-0	6	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-124423-30-00
		CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	ST40X-36S-CV(30)
		DESIGNED : TS. ITO	15.10.27	CODE NO.	CL241-0034-4-30
		DRAWN : AK. AKIYAMA	15.10.27		