


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

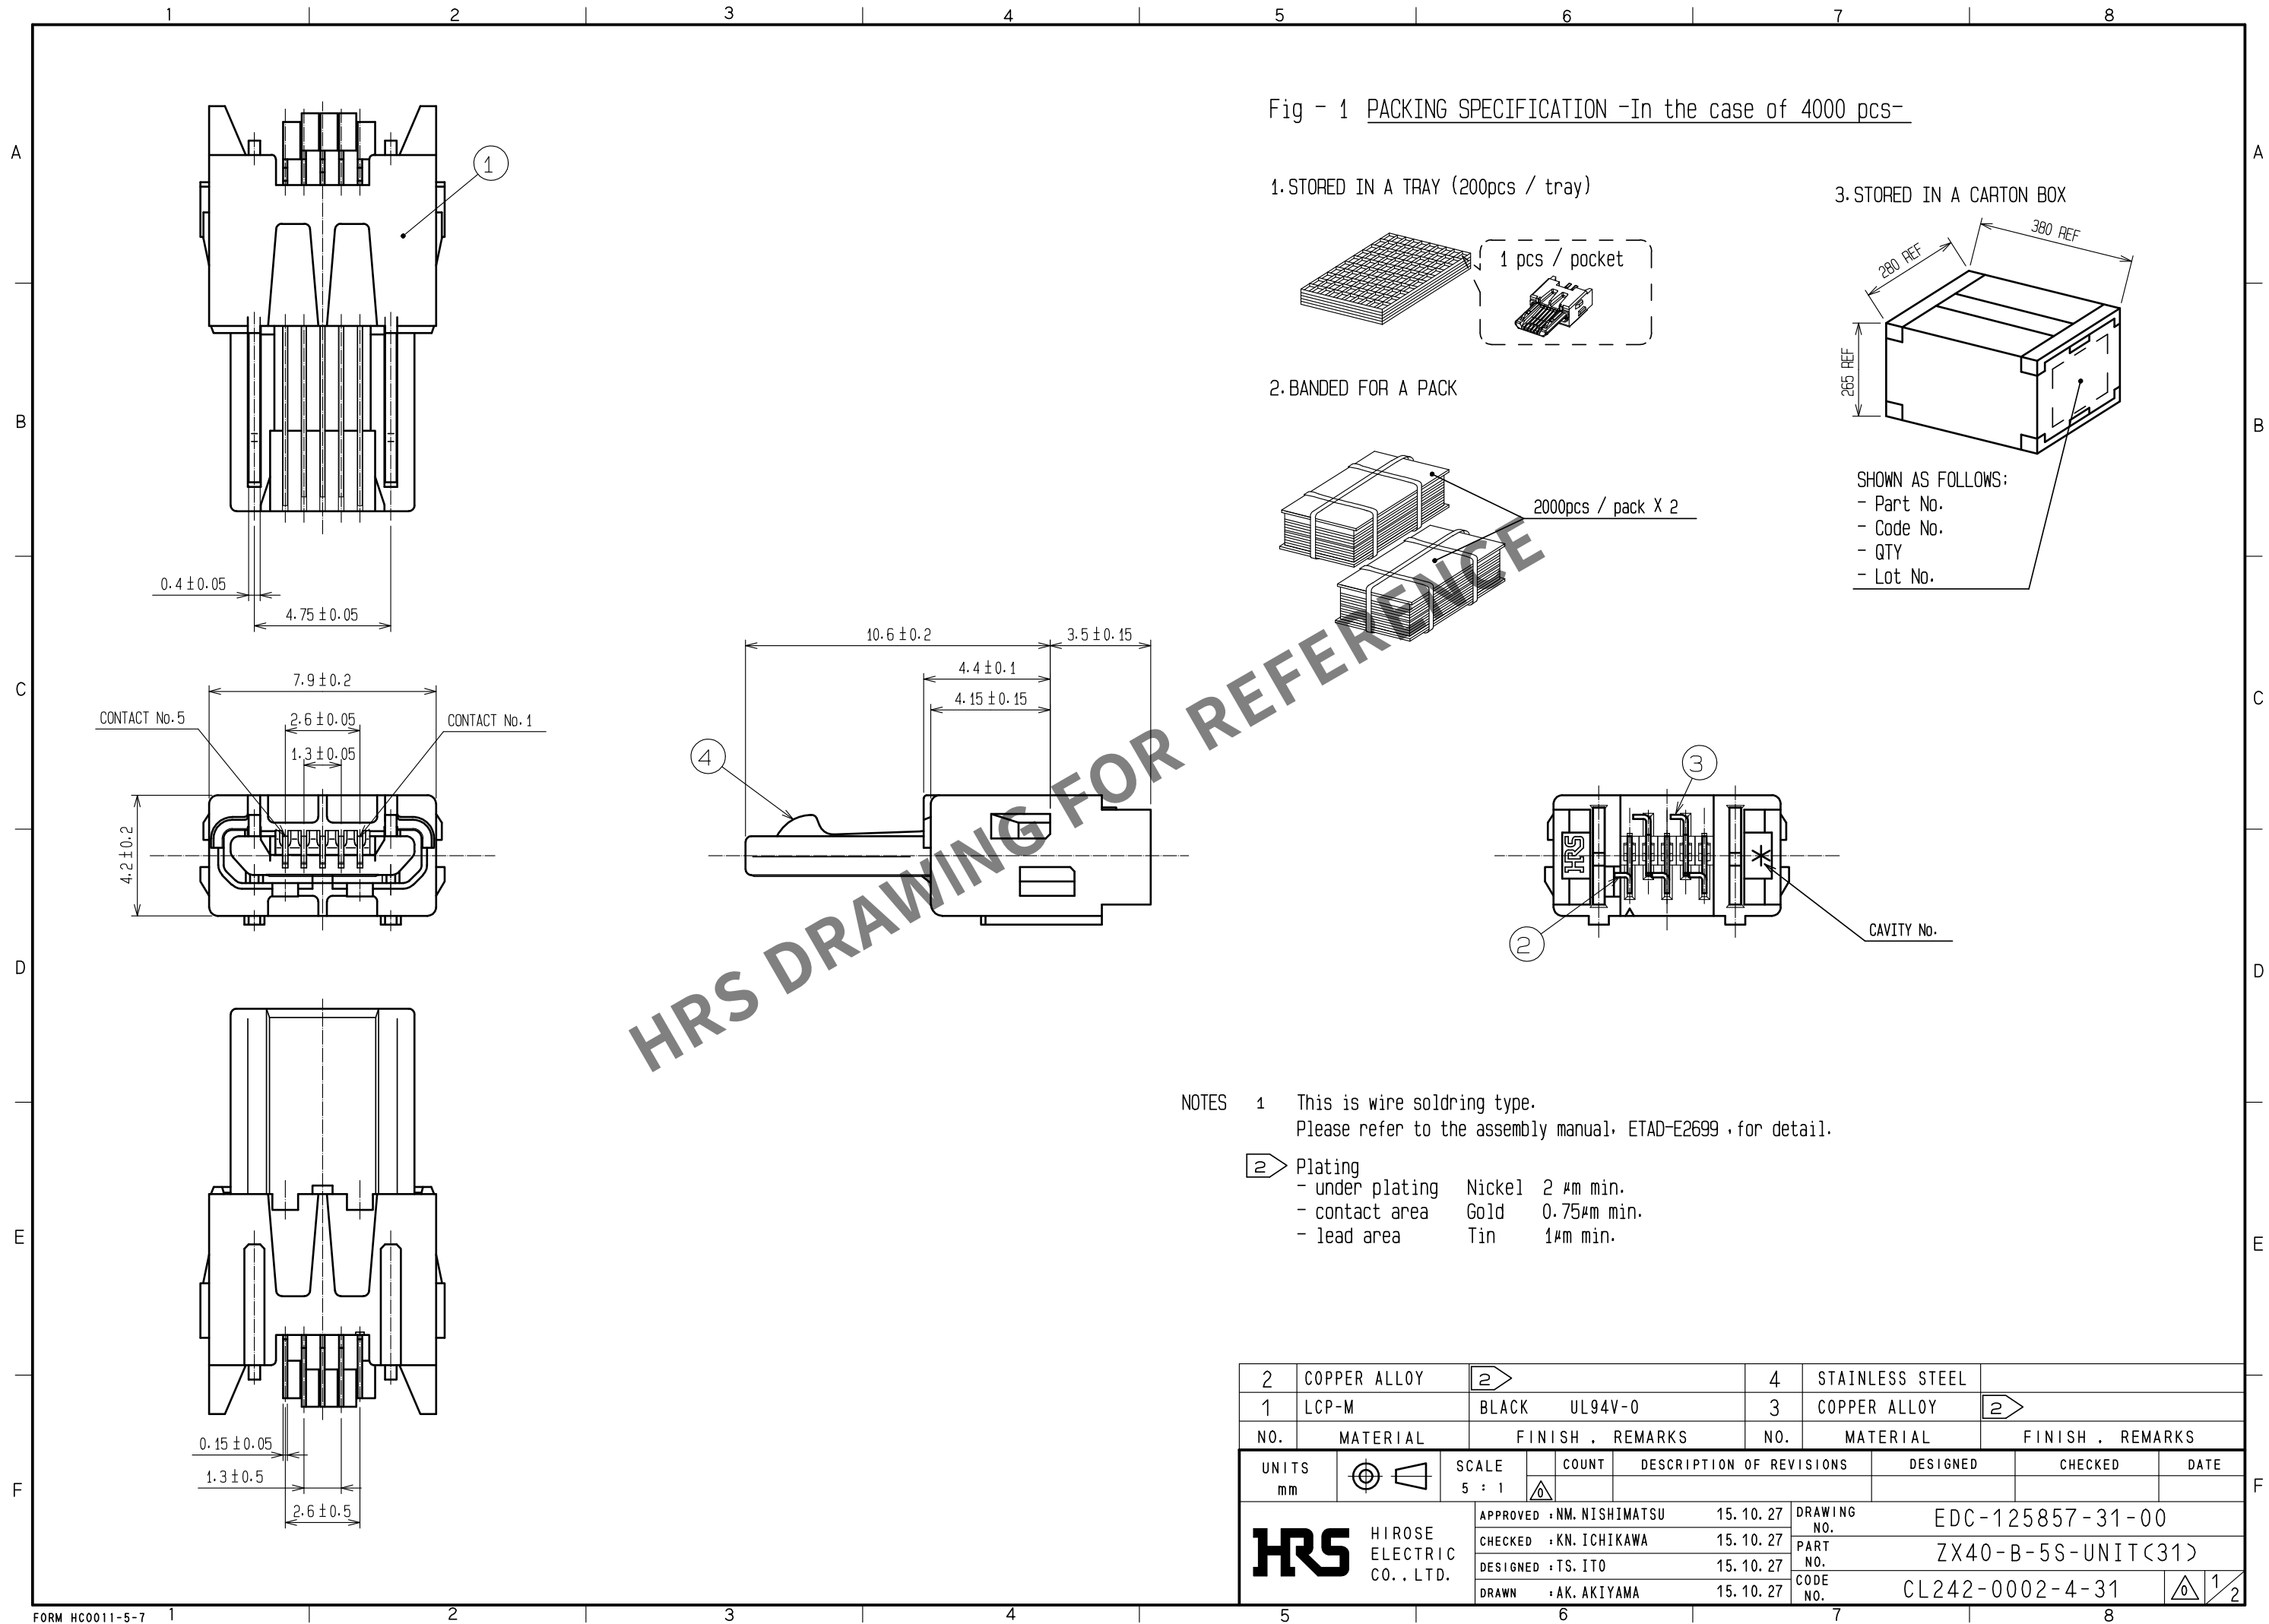

Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Fig - 2 SHIELDING-PLATE ASSEMBLY


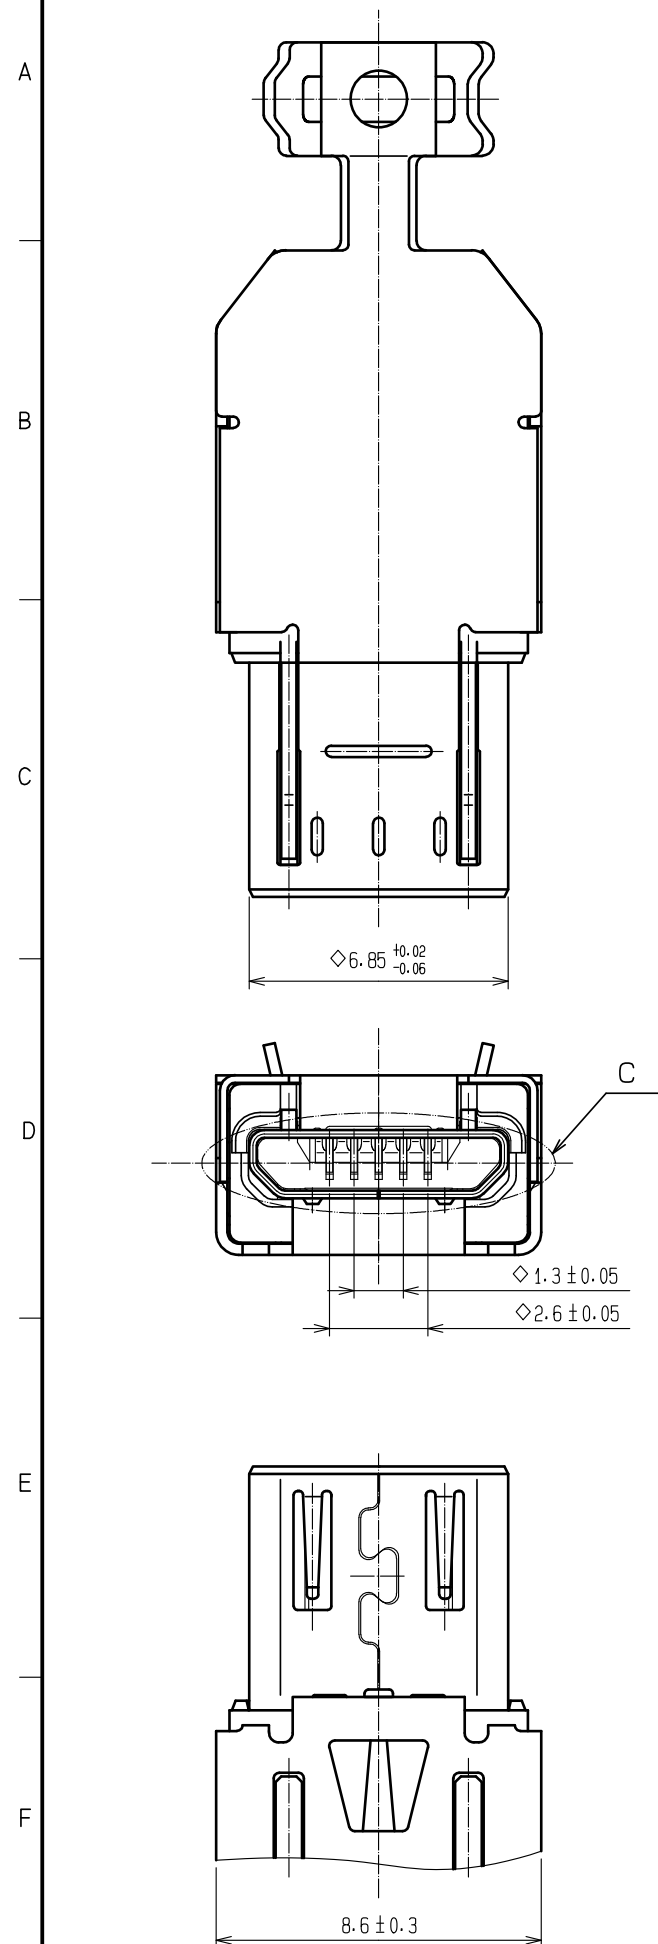


Fig - 3 OVER-MOLDING
(Refer to USB specification)

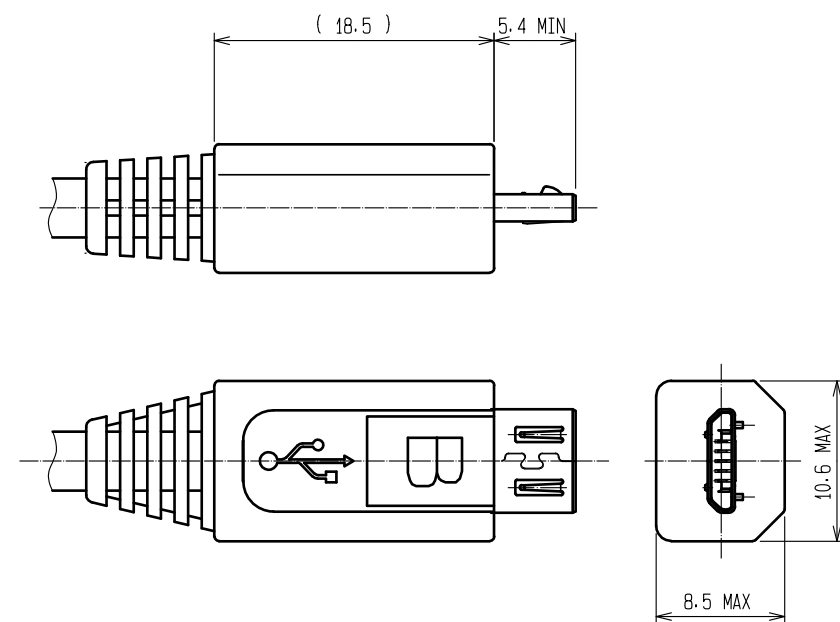

ZX40-B-SLDA

Code No. CL242-0003-7

Note:
- Sold separately
- Delivered by the reel

ZX40-SLDB

Code No. CL242-0004-0

Note:
- Sold separately
- Delivered by the reel
- Applied to Ø3.8mm cable


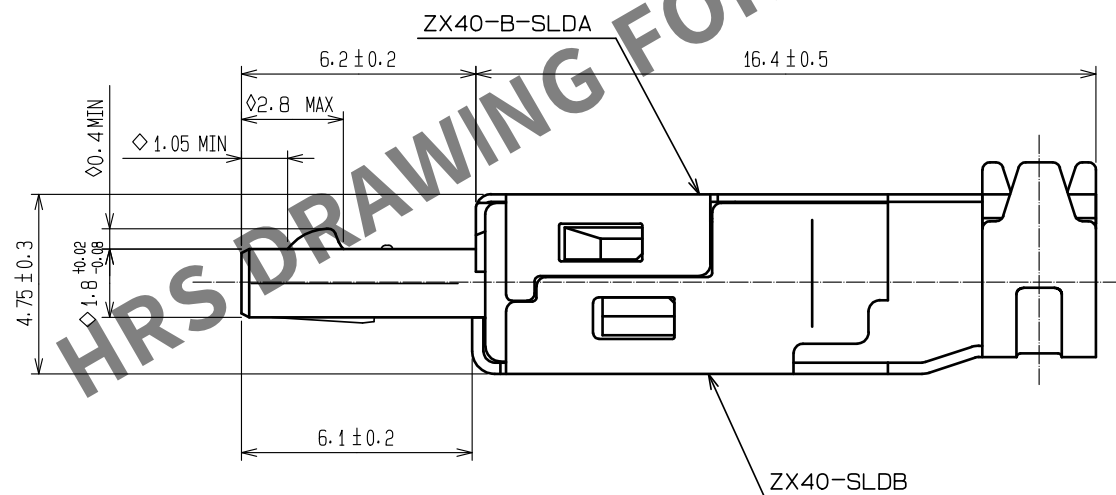


Fig - 4 MATED CONDITION

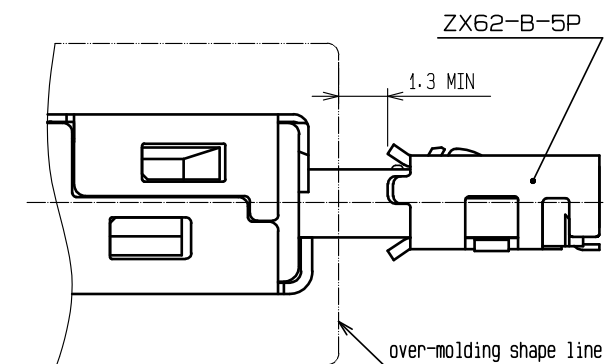

NOTES 3 Shielding-plates, ZX40-B-SLDA and ZX40-SLDB, are used for assembly.
4 *Ø symbol added to each dimension means critical dimension on USB specification.
Please check them after over-molding.

HRS

DRAWING NO.	EDC-125857-31-00
PART NO.	ZX40-B-5S-UNIT(31)
CODE NO.	CL242-0002-4-31

2/2