


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

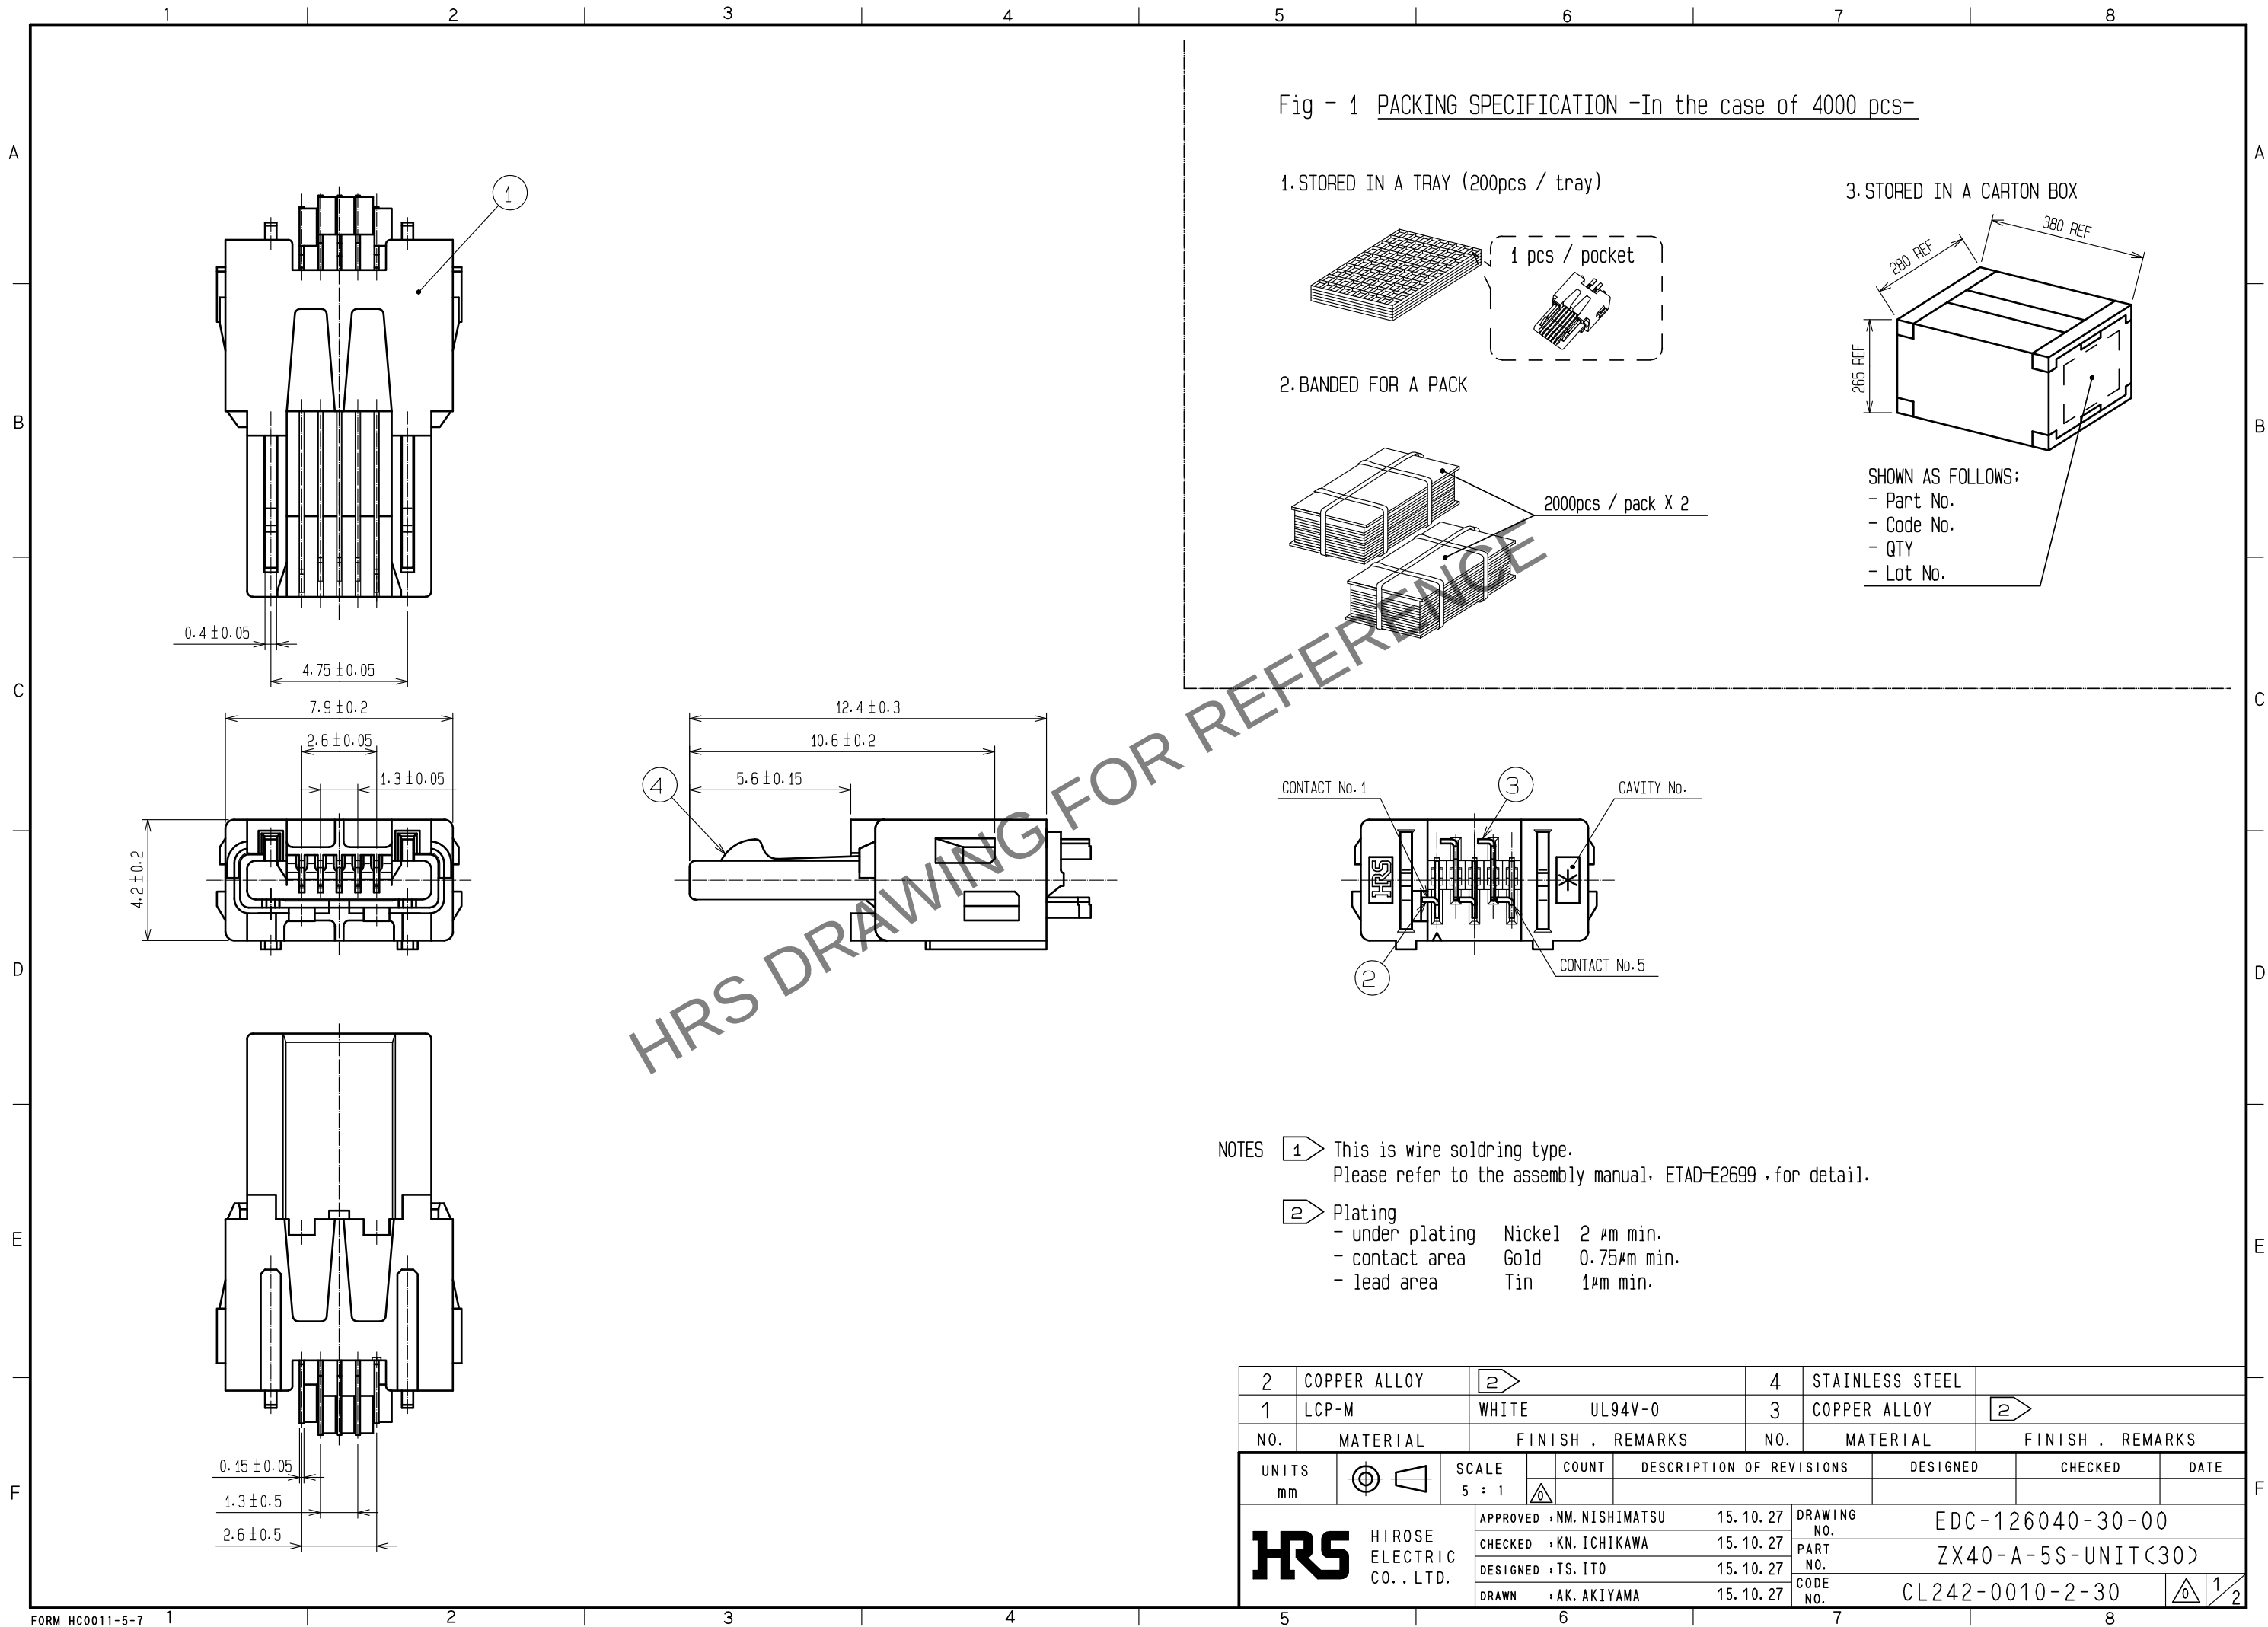

Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Fig - 2 SHIELDING-PLATE ASSEMBLY



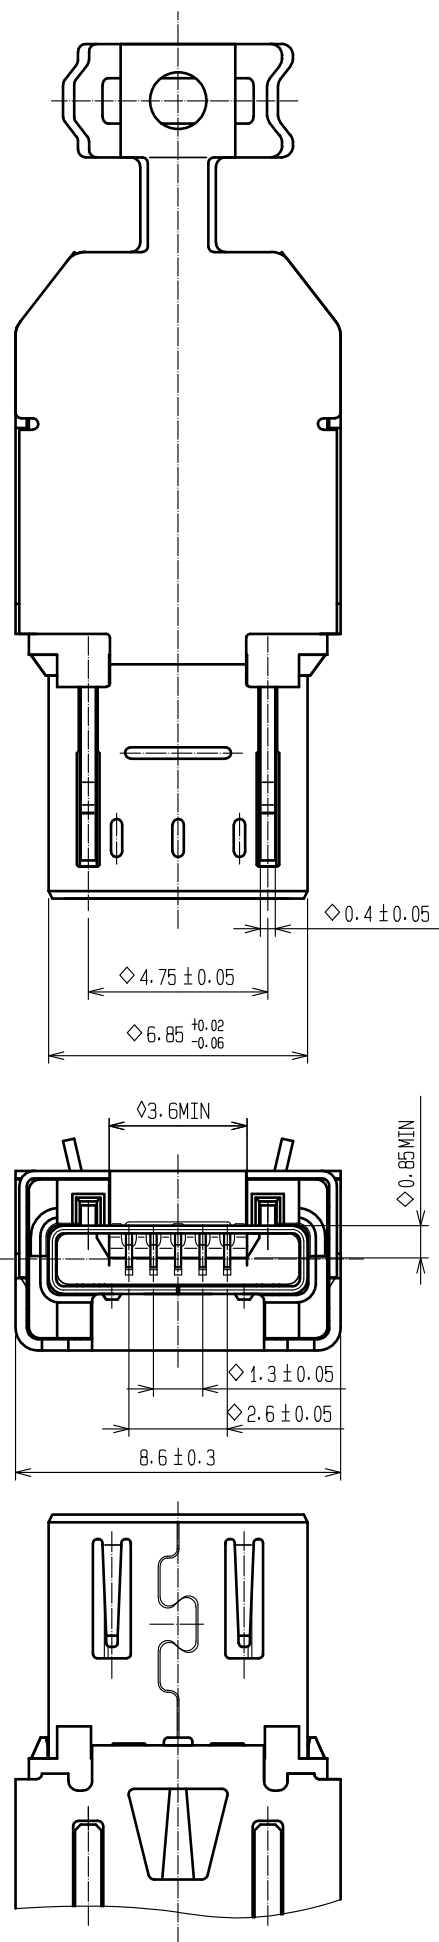


Fig - 3 OVER-MOLDING
(Refer to USB specification)

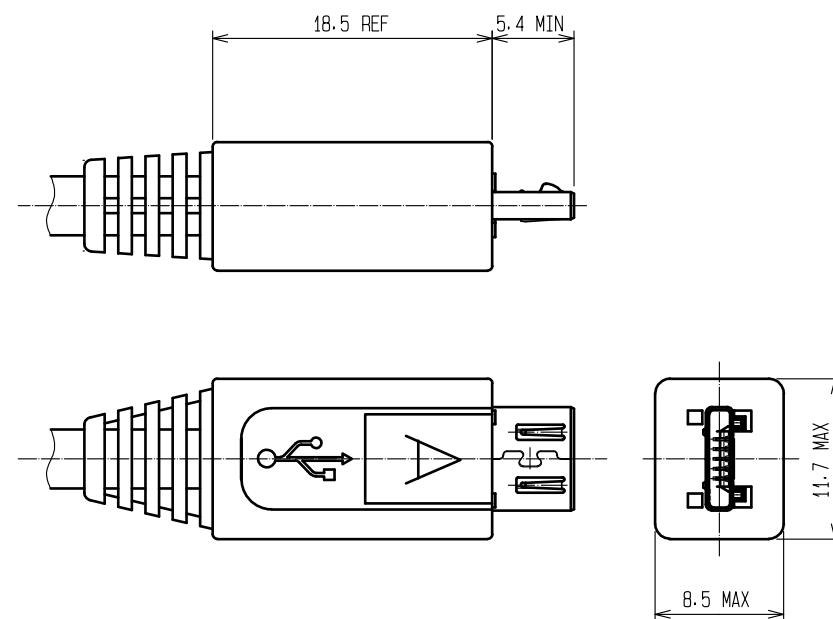


ZX40-A-SLDA
Code No. CL242-0011-5

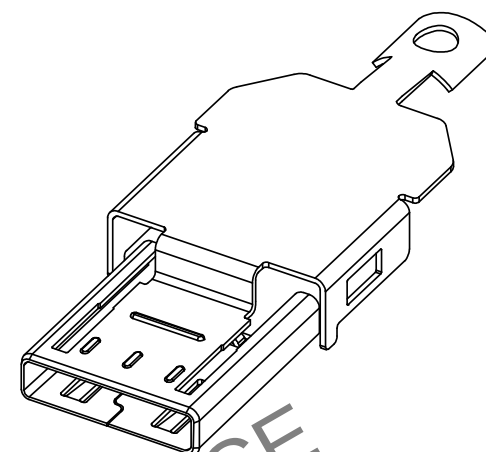


Note:
- Sold separately
- Delivered by the reel

ZX40-SLDB
Code No. CL242-0004-0

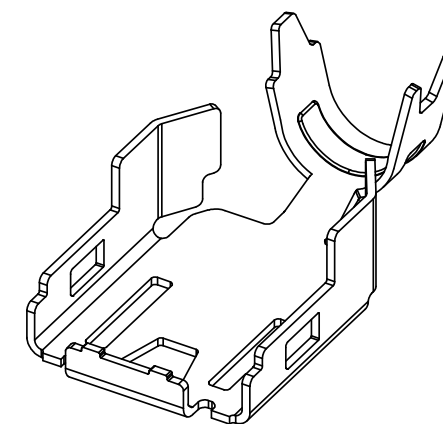

Note:
- Sold separately
- Delivered by the reel
- Applied to Ø3.8mm cable

Fig - 4 MATED CONDITION

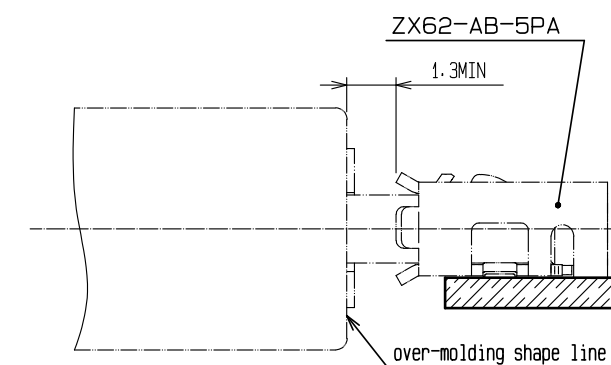

NOTES 3 Shielding-plates, ZX40-A-SLDA and ZX40-SLDB, are used for assembly.
4 *◇*symbol added to each dimension means critical dimension on USB specification.
Please check them after over-molding.

HRS

DRAWING NO.	EDC-126040-30-00
PART NO.	ZX40-A-5S-UNIT<30>
CODE NO.	CL242-0010-2-30

2/2