

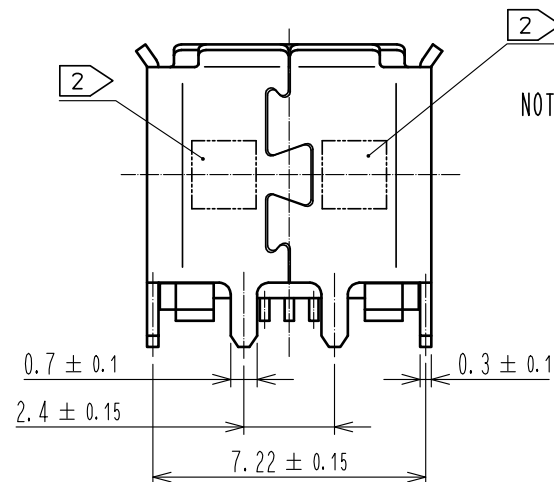
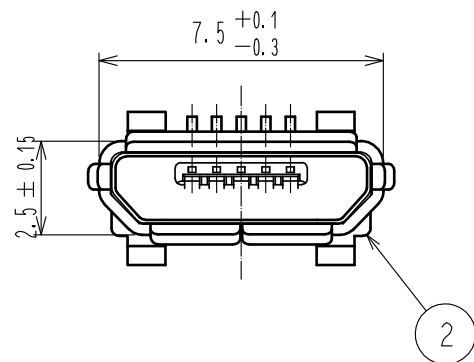


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


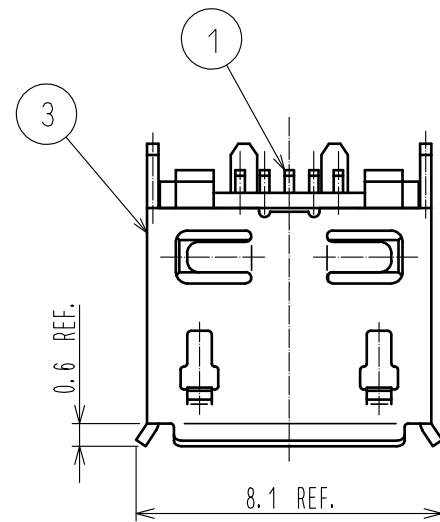


- NOTE
- CO-PLANARITY IS WITHIN 0.08.
 - LOT No. SHALL BE INDICATED AT THE POSITION AS SHOWN.
 - PLATING
CONTACT AREA : GOLD PLATE 0.75 μm MIN.
LEAD AREA : GOLD PLATE 0.05 μm MIN.
UNDER PLATING : NICKEL 2 μm MIN.
 - 1 REEL: 400 pcs.
 - AS FOR PART No.3, THE PERFORMANCE REMAINS GOOD EVEN IF THERE IS A RUBBING WOUND BY THE ASSEMBLY PROCESS. AND THE PERFORMANCE REMAINS GOOD EVEN IF THERE IS A DIFFERENCE OF THE COLOR OF PLATING WITH THE MANUFACTURING LOT.

PCB LAYOUT FOR REFERENCE (FREE)

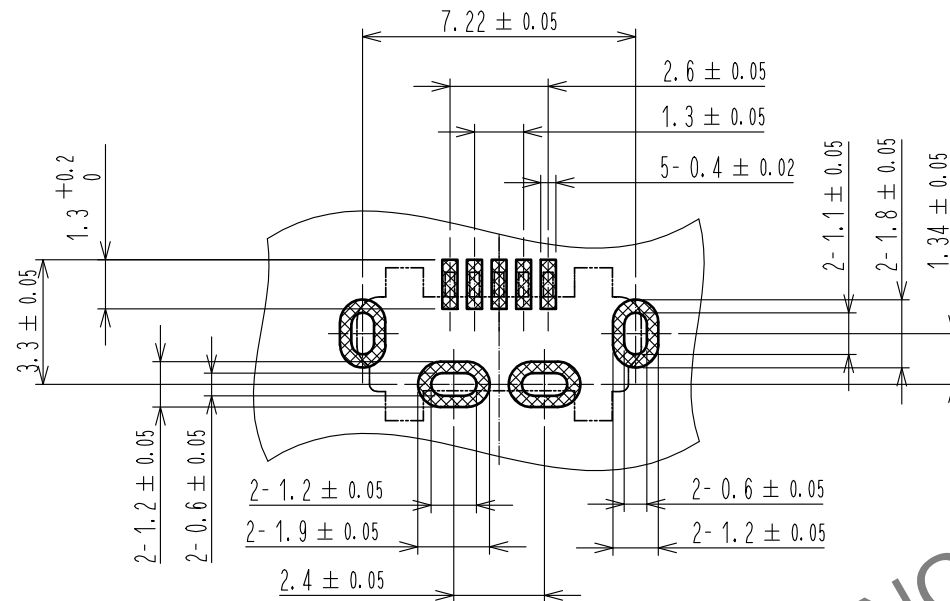


METAL MASK FOR REFERENCE (FREE)
(THICKNESS:0.1mm)

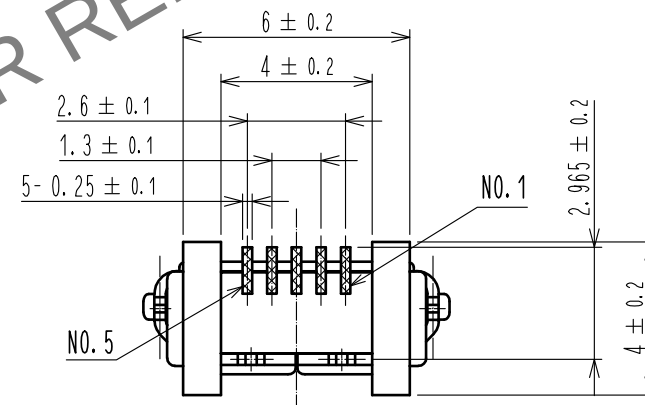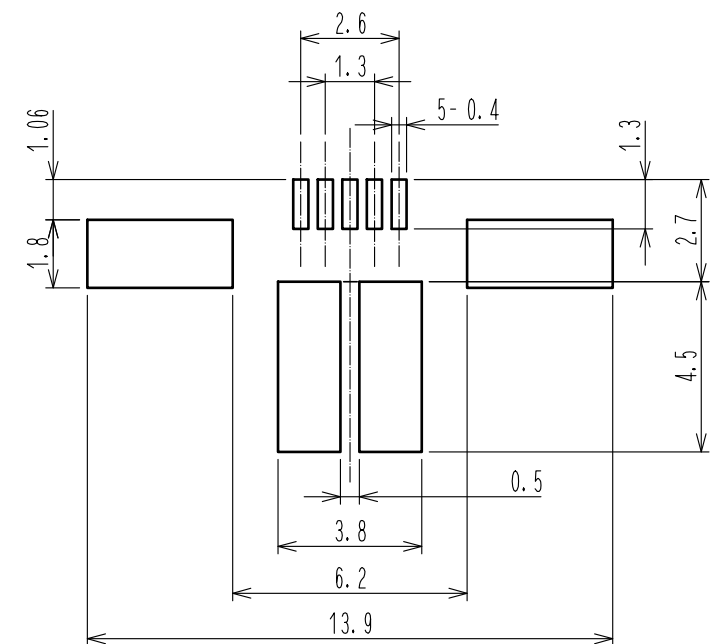


3	STAINLESS STEEL	UNDER PLATING: NICKEL 0.2 μm MIN. OVER PLATING : TIN 1 μm MIN. LUBRICANT	6	PE	
2	LCP	BLACK UL94V-0	5	PS	
1	COPPER ALLOY	3	4	POLYAMIDE RESIN	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-126723-31-00
		CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	ZX80-B-5P(31)
		DESIGNED : TS. ITO	15.10.27	CODE NO.	CL242-0051-0-31
		DRAWN : AK. AKIYAMA	15.10.27		



RECOMMENDED PANEL CUTOUT (4:1)

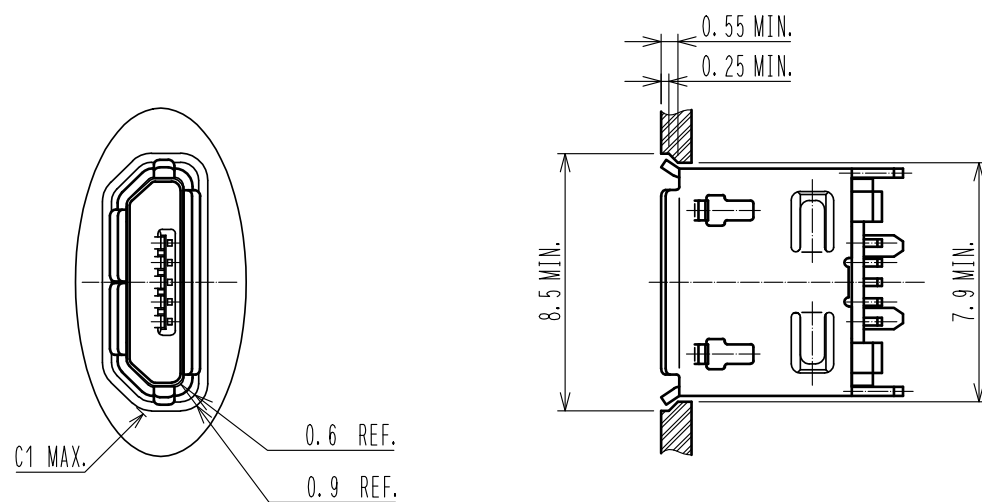



MATED WITH CORRESPONDING PLUG(4:1)

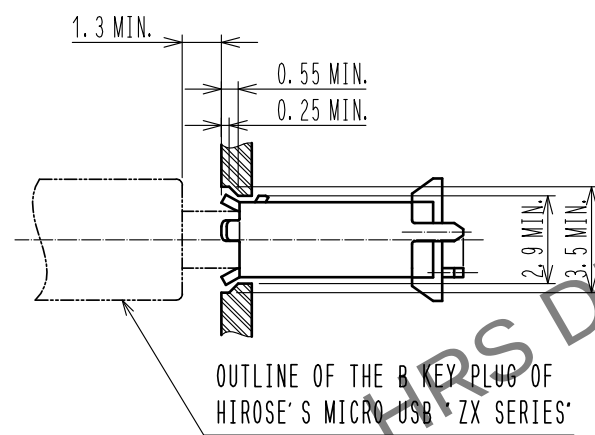

PICK AND PLACE CAP

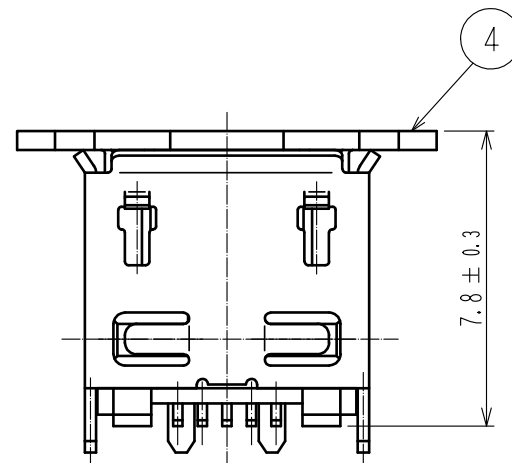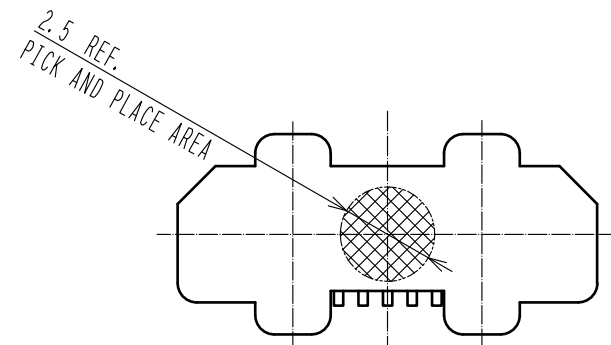

DRAWING FOR PACKING (FREE)

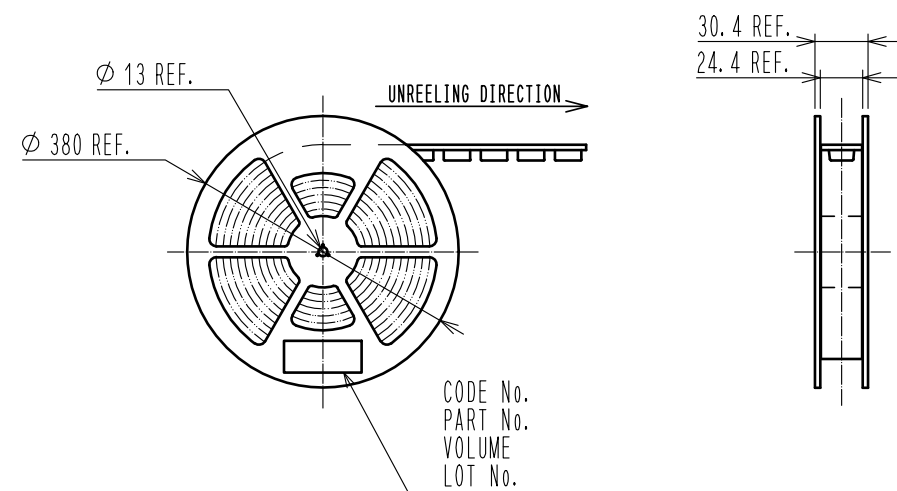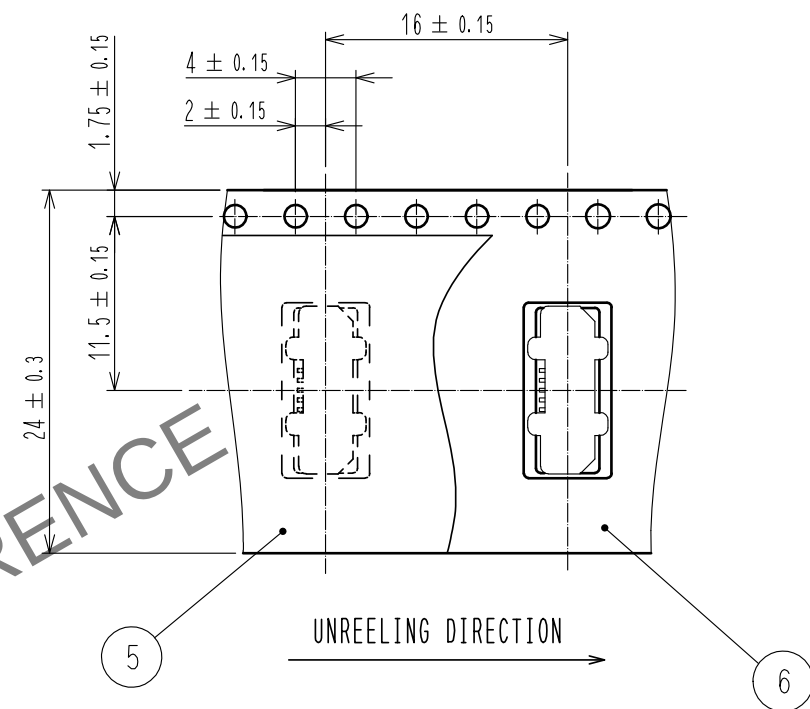

HRS

DRAWING NO.	EDC-126723-31-00
PART NO.	ZX80-B-5P(31)
CODE NO.	CL242-0051-0-31