


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

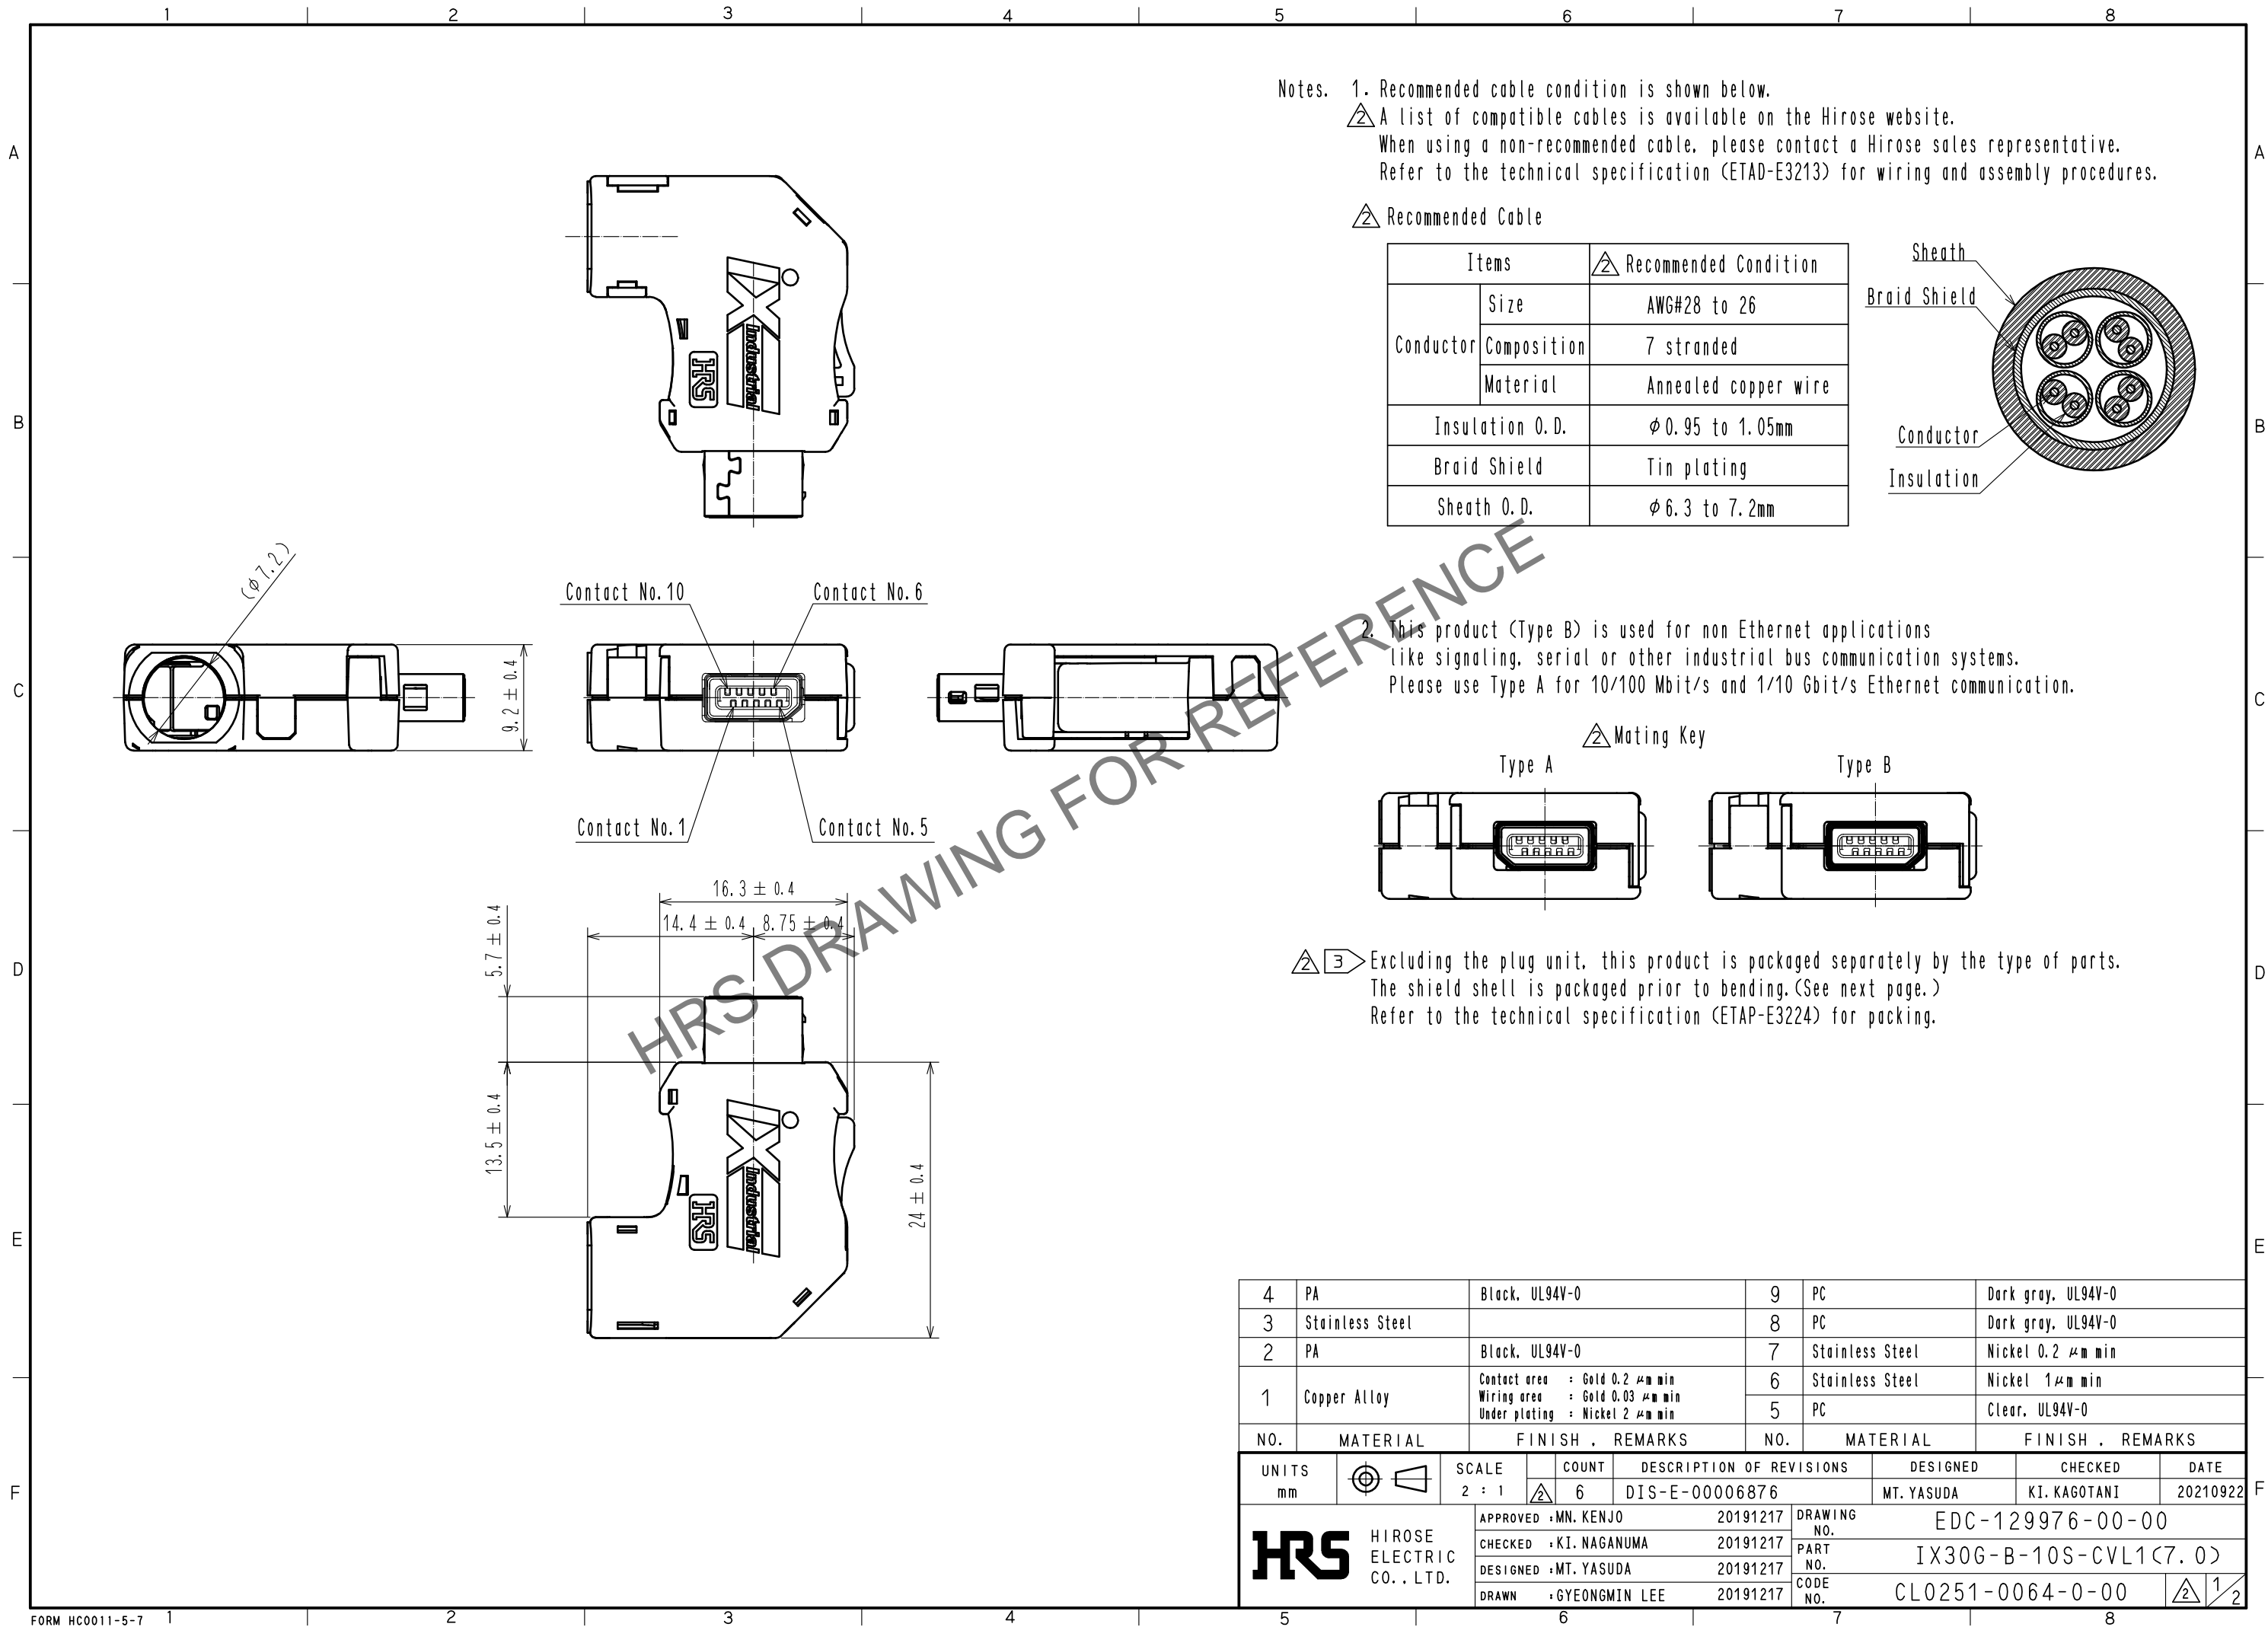


4	PA	Black, UL94V-0	9	PC	Dark gray, UL94V-0
3	Stainless Steel		8	PC	Dark gray, UL94V-0
2	PA	Black, UL94V-0	7	Stainless Steel	Nickel 0.2 μm min
1	Copper Alloy	Contact area : Gold 0.2 μm min Wiring area : Gold 0.03 μm min Under plating : Nickel 2 μm min	6	Stainless Steel	Nickel 1μm min
			5	PC	Clear, UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS



UNITS mm			SCALE 2 : 1		COUNT 6	DESCRIPTION OF REVISIONS DIS-E-00006876	DESIGNED MT. YASUDA	CHECKED KI. KAGOTANI	DATE 20210922
-------------	--	--	----------------	--	------------	--	------------------------	-------------------------	------------------

	HIROSE ELECTRIC CO., LTD.	APPROVED : MN. KENJO 20191217		DRAWING NO. EDC-129976-00-00
		CHECKED : KI. NAGANUMA 20191217		
		DESIGNED : MT. YASUDA 20191217		CODE NO. CL0251-0064-0-00
		DRAWN : GYEONGMIN LEE 20191217		


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

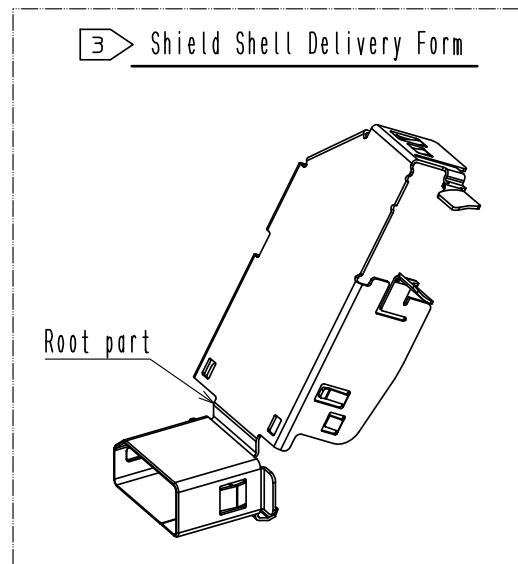

3 Product Structure

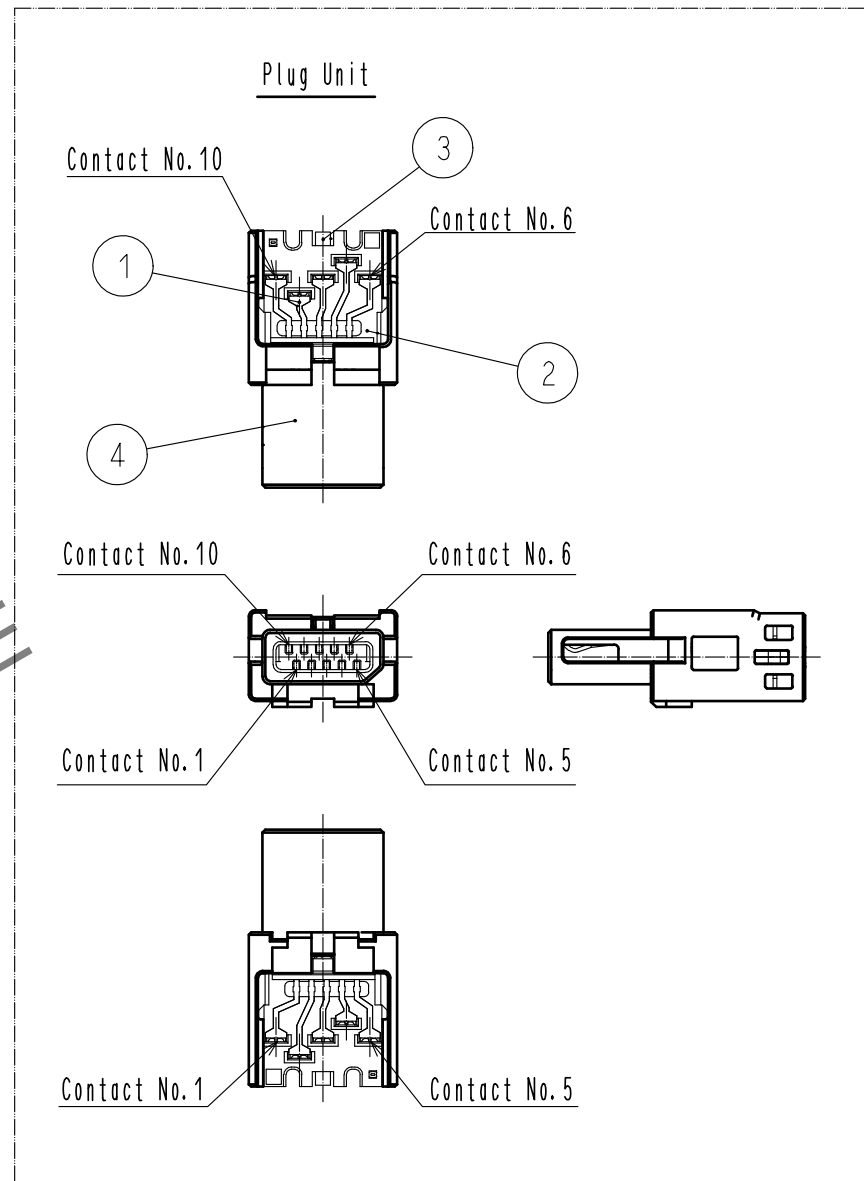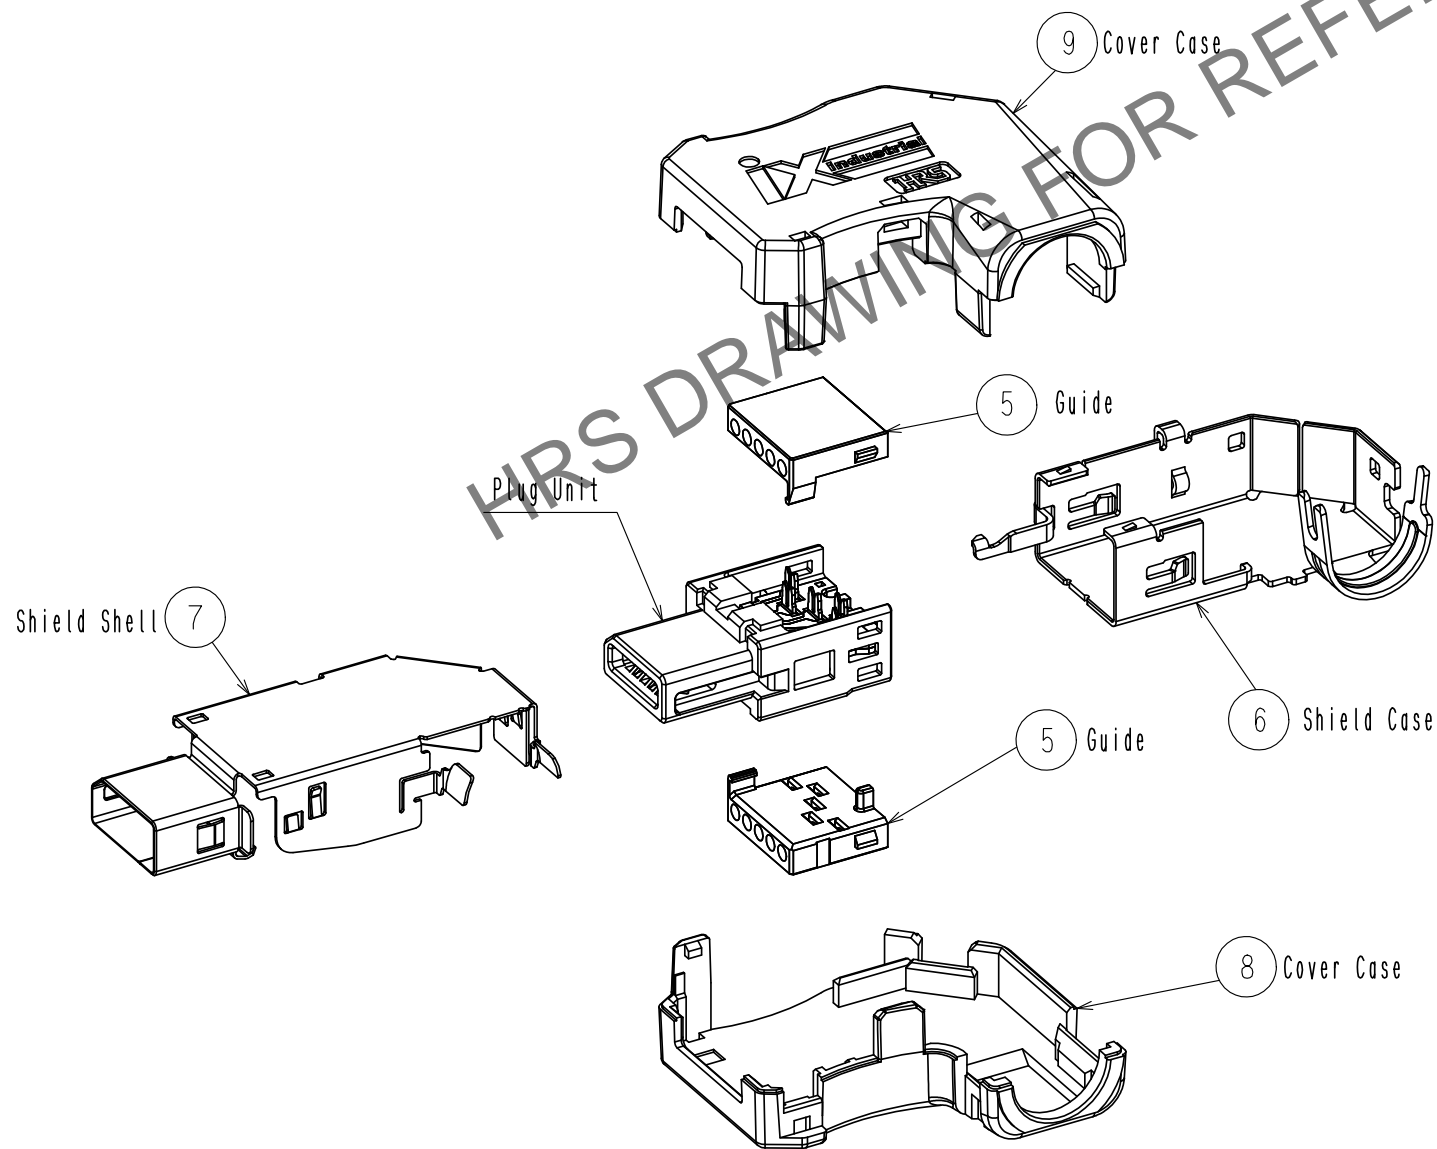

2 Mated Condition

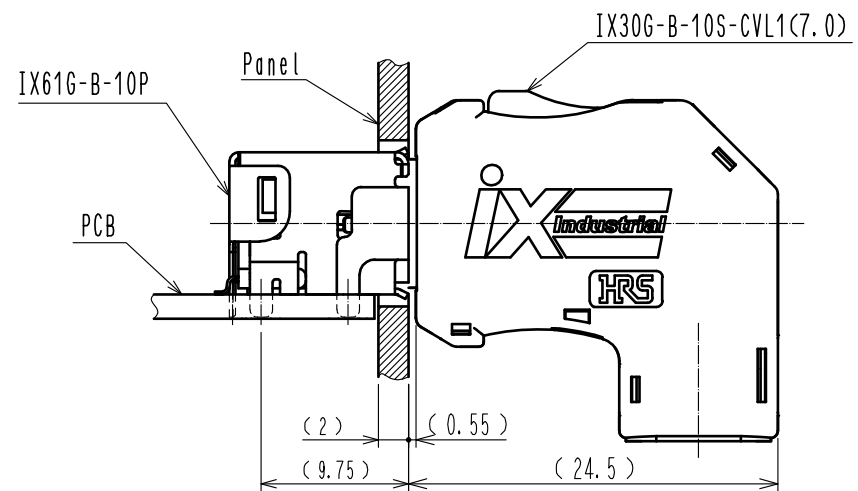

HRS

DRAWING NO.	EDC-129976-00-00
PART NO.	IX30G-B-10S-CVL1(7.0)
CODE NO.	CL0251-0064-0-00

2/2