
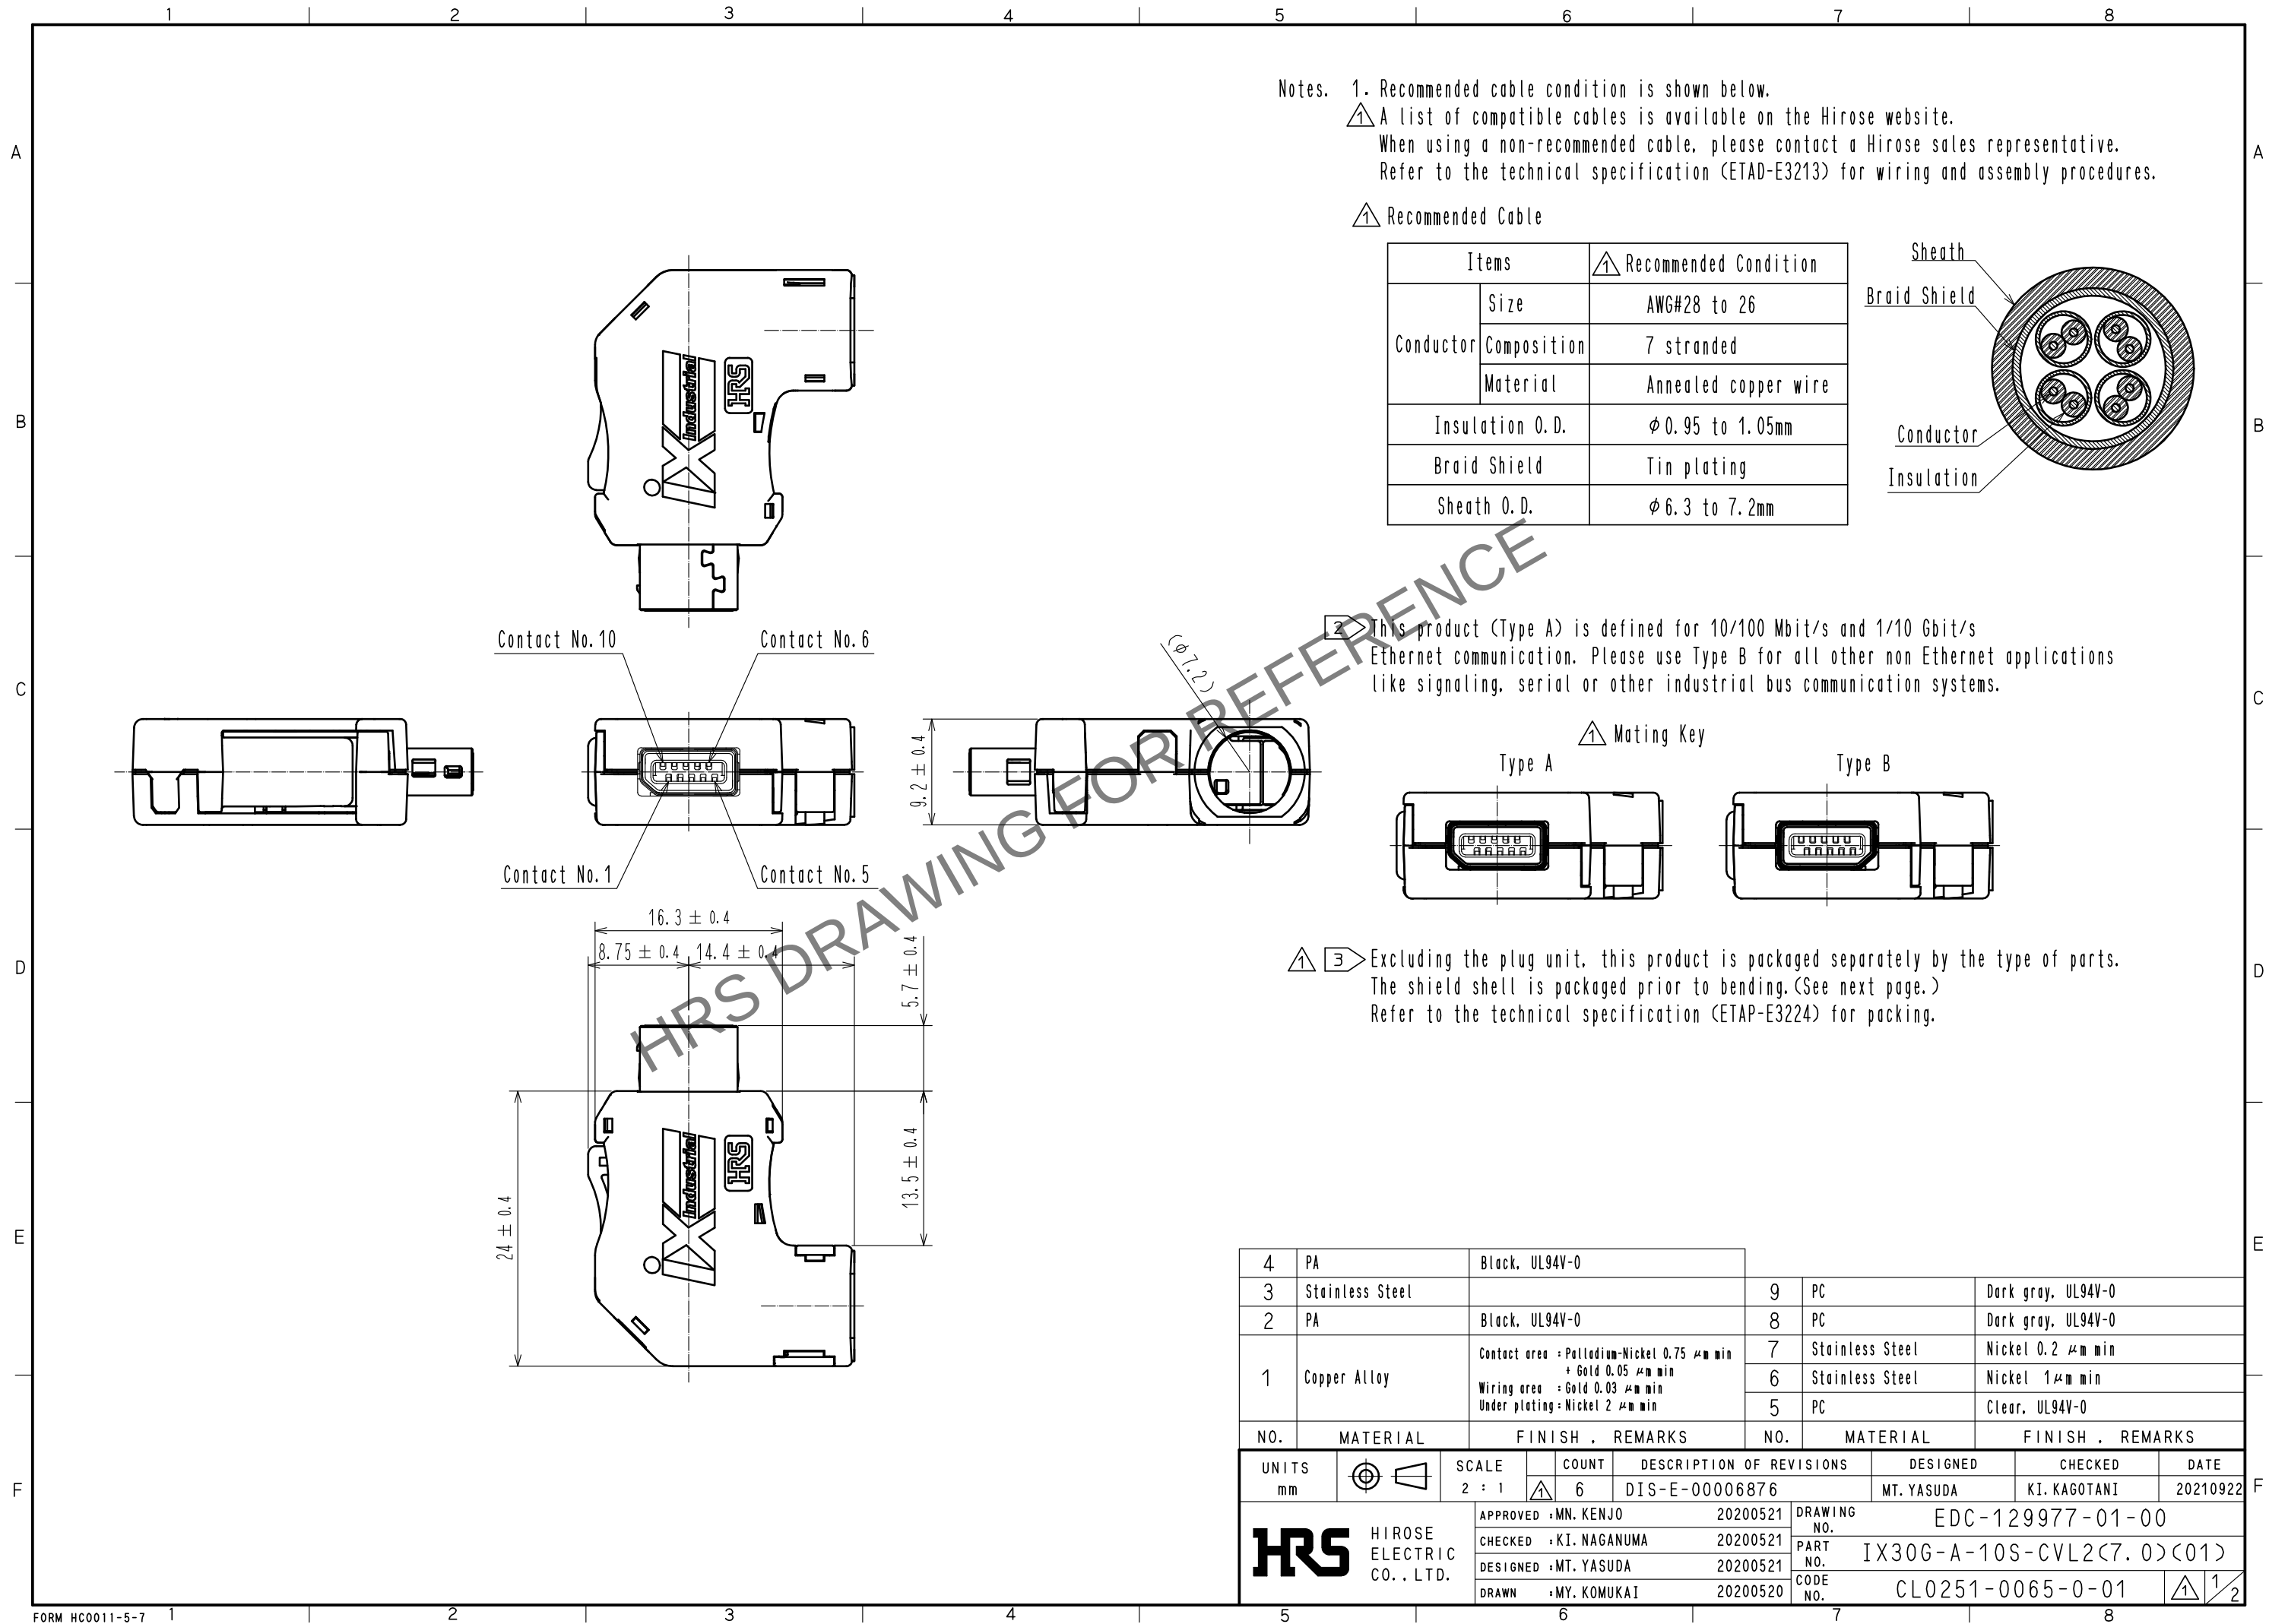


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



4	PA	Black, UL94V-0			
3	Stainless Steel		9	PC	Dark gray, UL94V-0
2	PA	Black, UL94V-0	8	PC	Dark gray, UL94V-0
1	Copper Alloy	Contact area : Palladium-Nickel 0.75 μm min + Gold 0.05 μm min Wiring area : Gold 0.03 μm min Under plating : Nickel 2 μm min	7	Stainless Steel	Nickel 0.2 μm min
			6	Stainless Steel	Nickel 1 μm min
			5	PC	Clear, UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS


UNITS mm		SCALE 2 : 1		COUNT 6	DESCRIPTION OF REVISIONS DIS-E-00006876	DESIGNED MT. YASUDA	CHECKED KI. KAGOTANI	DATE 20210922
 HIROSE ELECTRIC CO. , LTD.		APPROVED : MN. KENJO	20200521	DRAWING NO.	EDC-129977-01-00			
		CHECKED : KI. NAGANUMA	20200521	PART NO.	IX30G-A-10S-CVL2(7.0)<01>			
		DESIGNED : MT. YASUDA	20200521	CODE NO.	CL0251-0065-0-01			
		DRAWN : MY. KOMUKAI	20200520	 				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


2 Pin Assignment For 10/100 Mbit/s And 1/10 Gbit/s Ethernet

Contact No.	Signal	
	10/100 Mbit/s	1/10 Gbit/s
1	TX+	BI_DA+
2	TX-	BI_DA-
3	N.C	N.C
4	N.C	BI_DC+
5	N.C	BI_DC-
6	RX+	BI_DB+
7	RX-	BI_DB-
8	N.C	N.C
9	N.C	BI_DD+
10	N.C	BI_DD-




3 Shield Shell Delivery Form

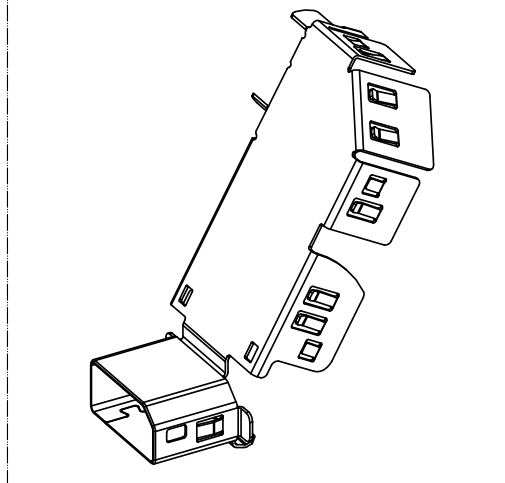


3 Product Structure

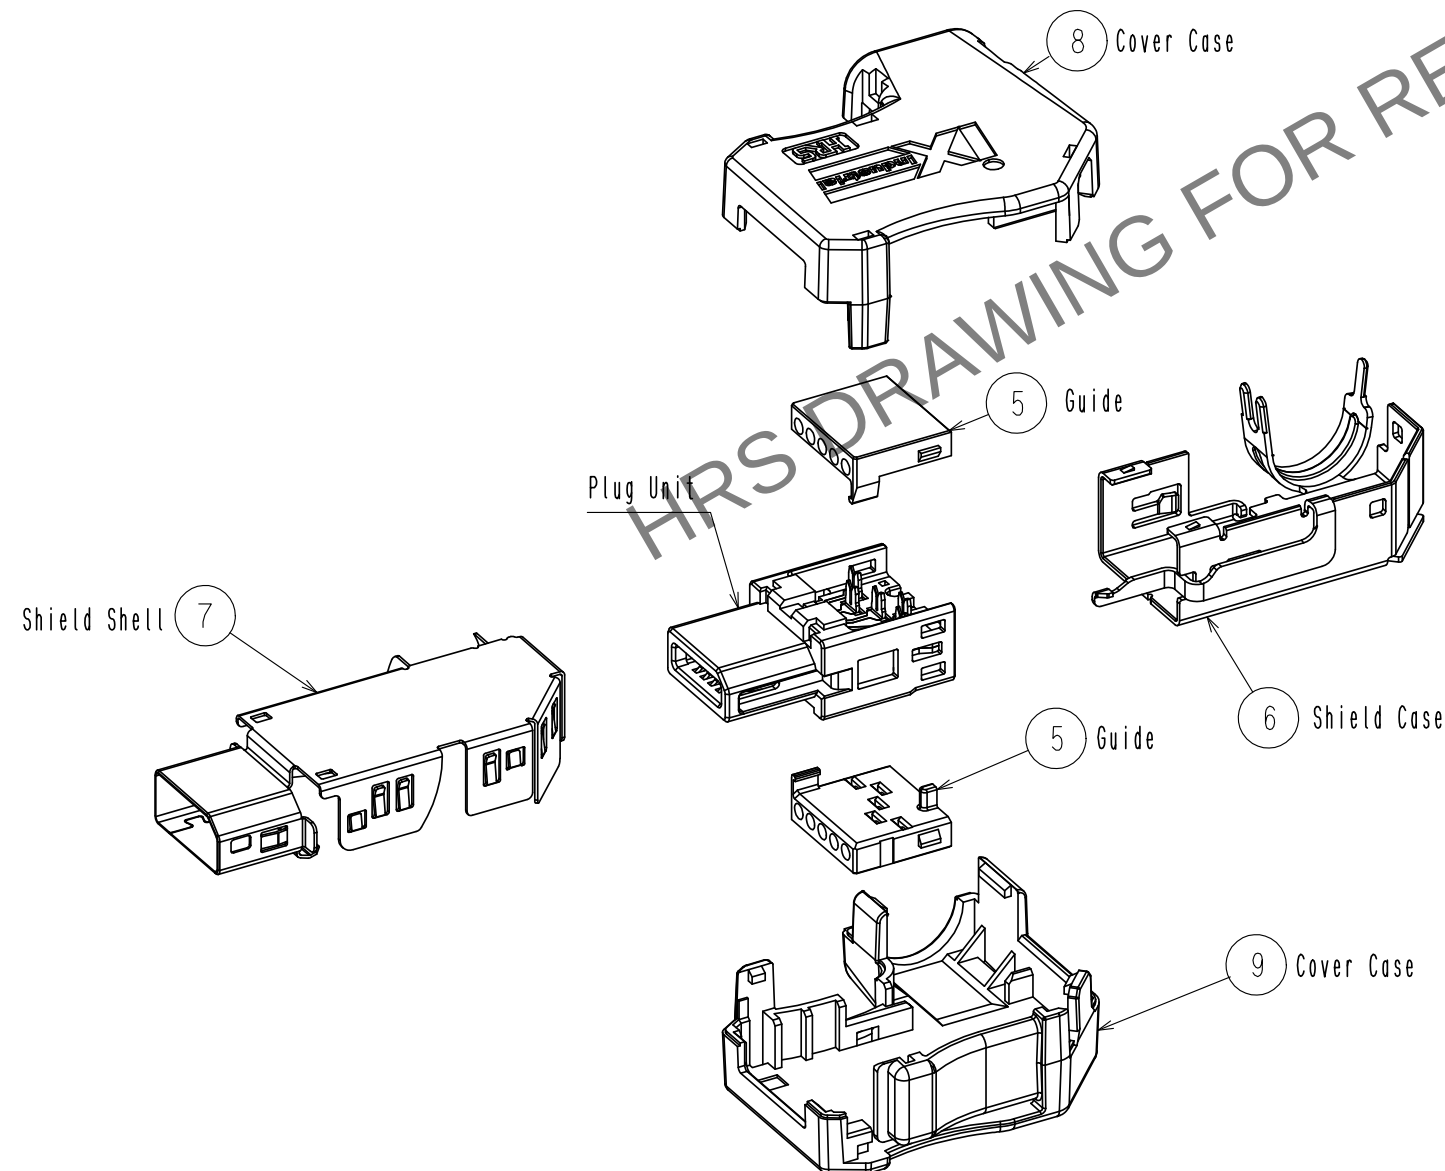

Plug Unit

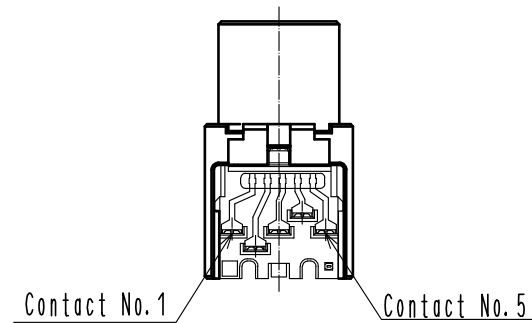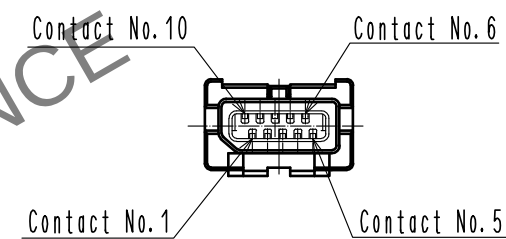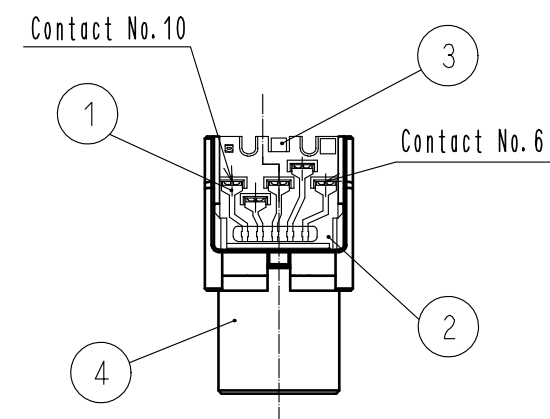

1 Mated Condition

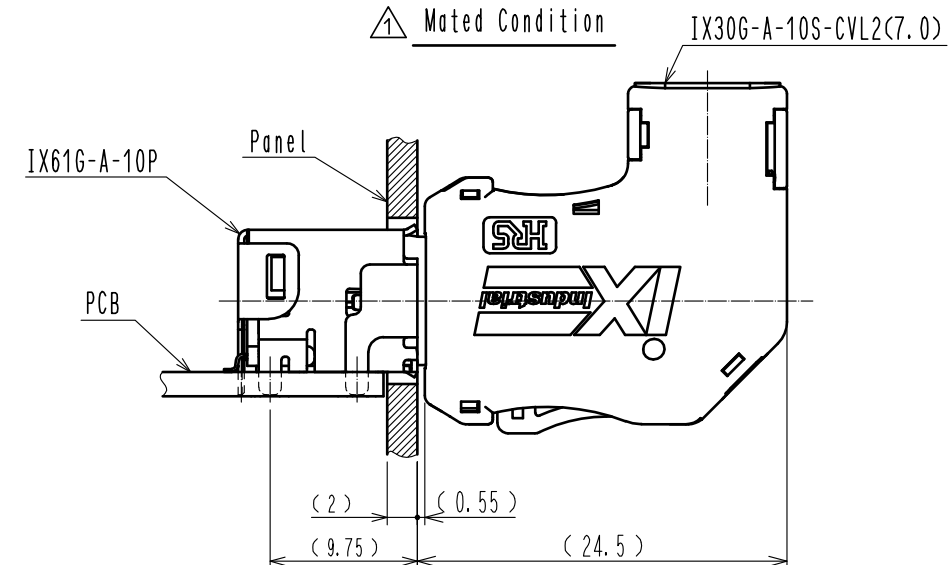

HRS

DRAWING NO.	EDC-129977-01-00
PART NO.	IX30G-A-10S-CVL2(7.0)<01>
CODE NO.	CL0251-0065-0-01

1/2