


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

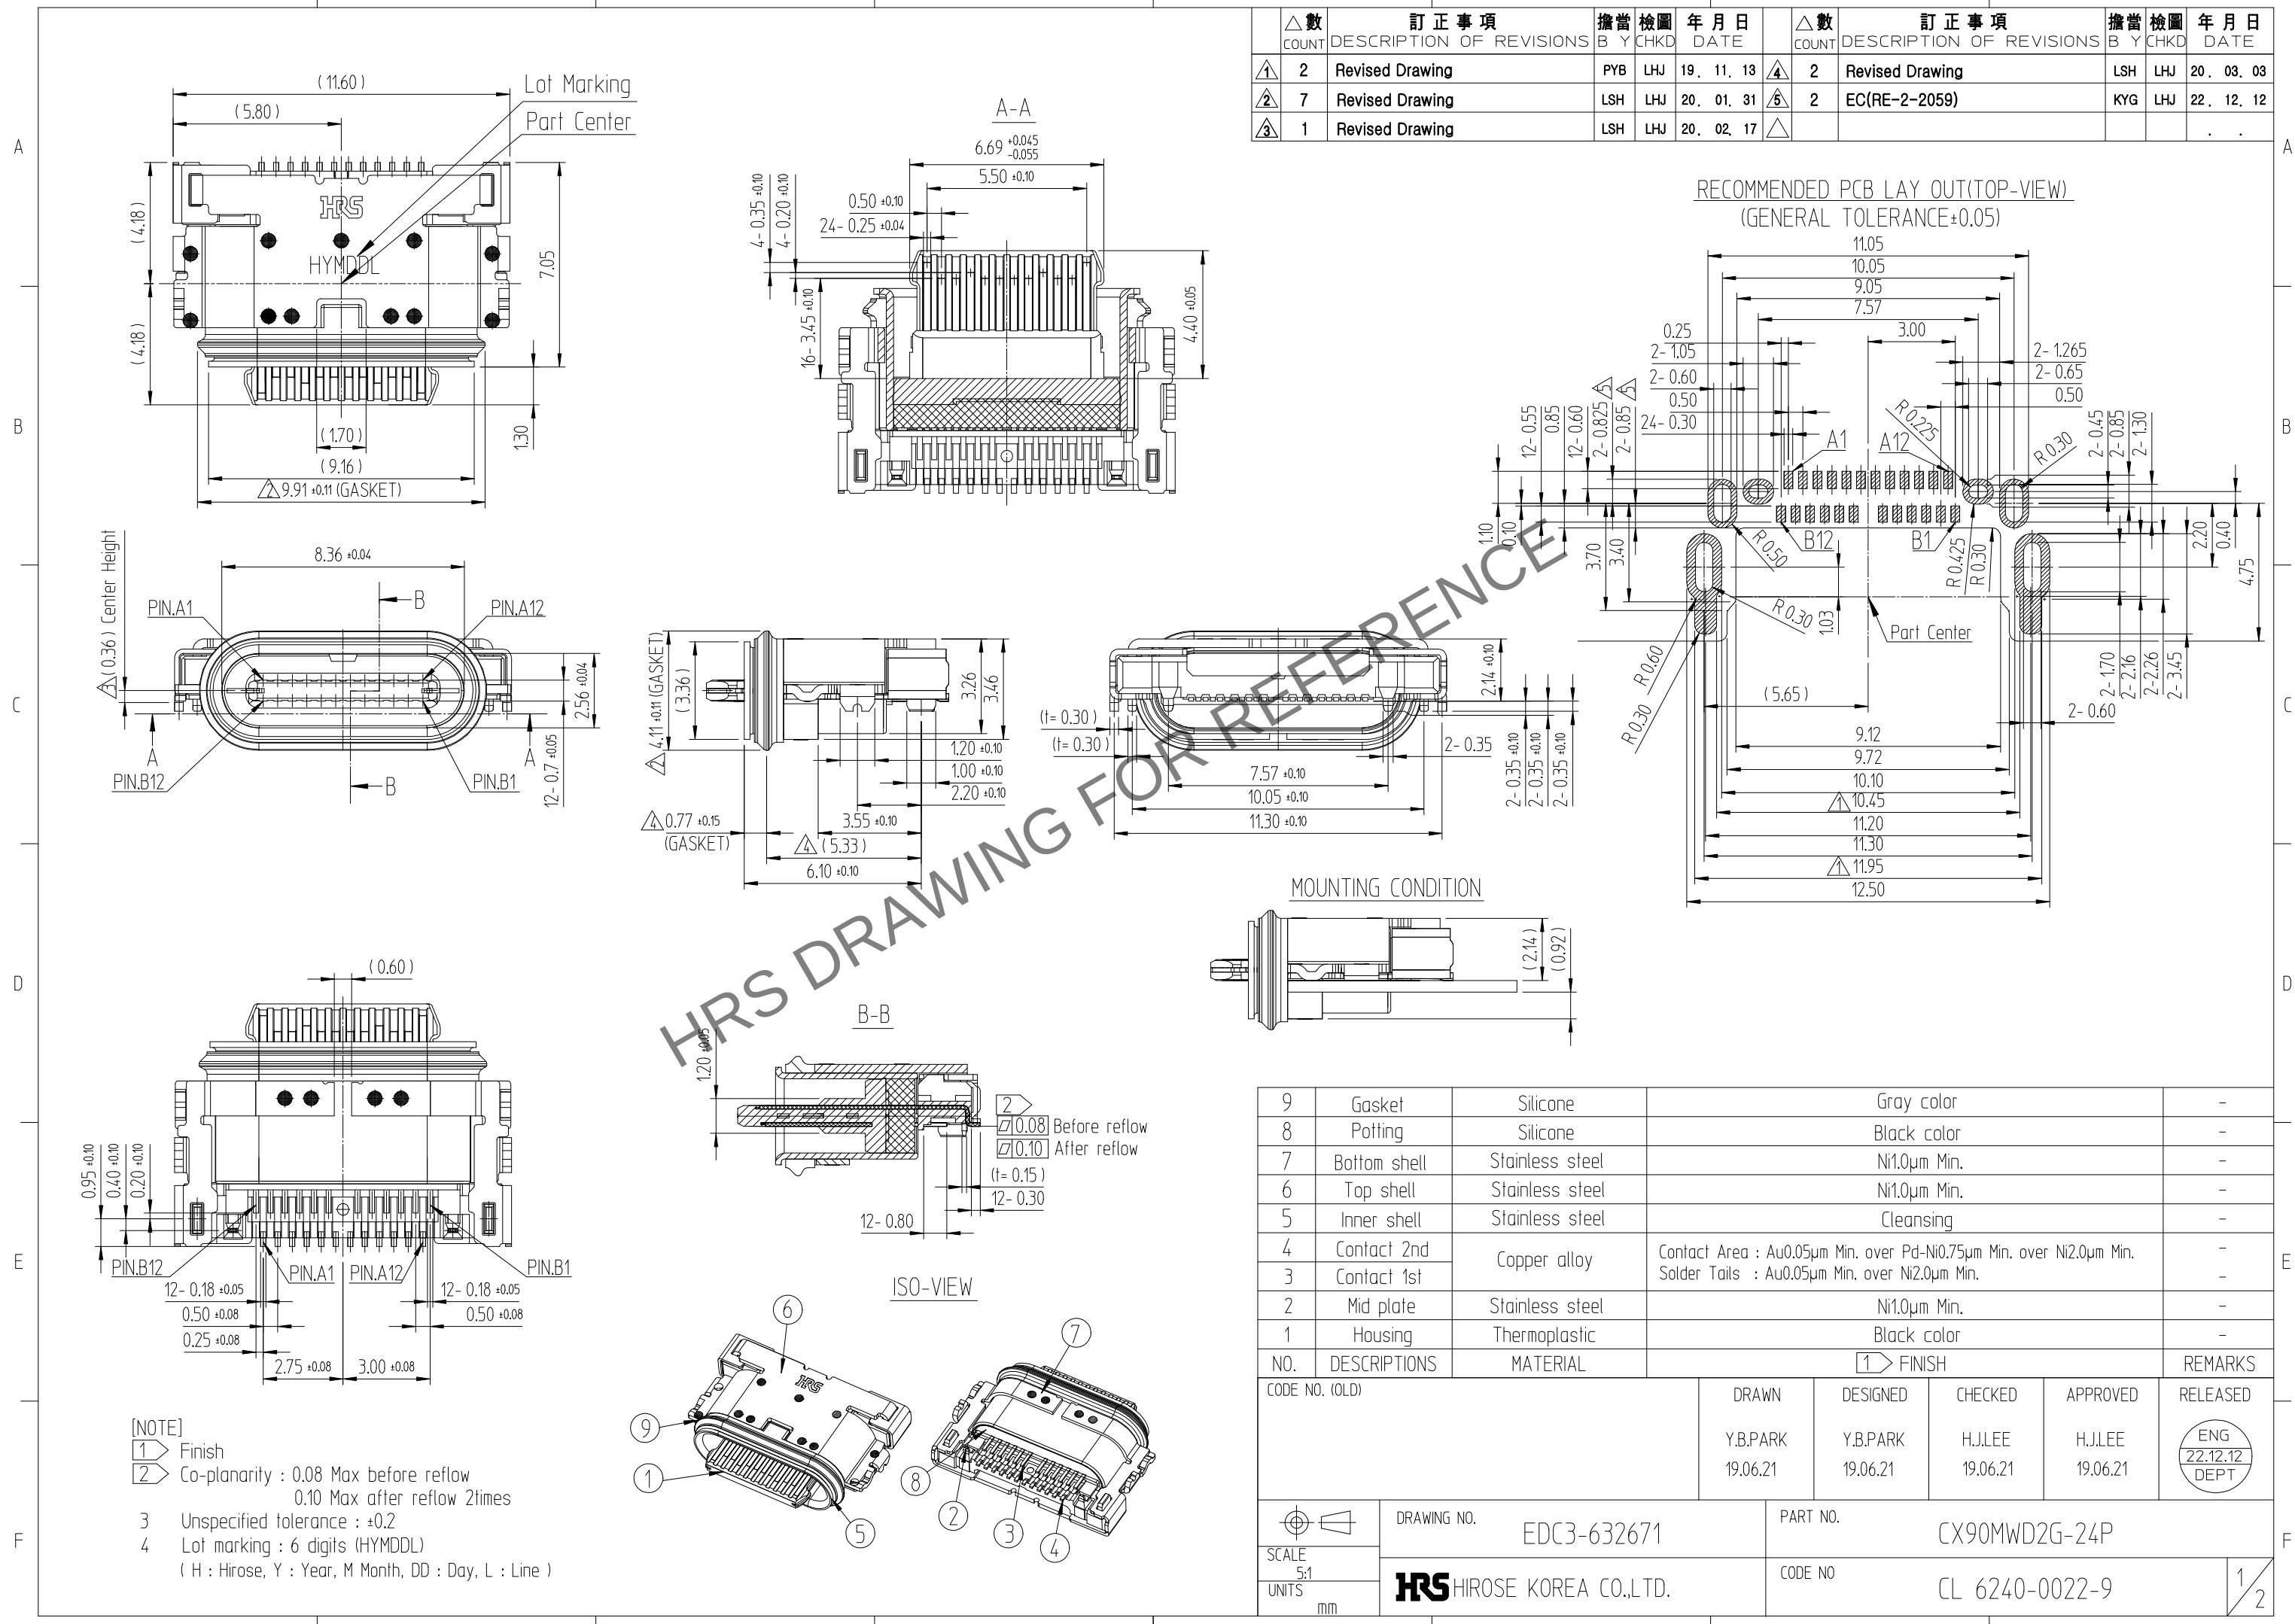

[NOTE]
1 Finish
2 Co-planarity : 0.08 Max before reflow
0.10 Max after reflow 2times
3 Unspecified tolerance : ± 0.2
4 Lot marking : 6 digits (HYMDDL)
(H : Hirose, Y : Year, M Month, DD : Day, L : Line)

訂正事項				訂正事項			
△數	DESCRIPTION OF REVISIONS	擔當	檢圖	年月日	△數	DESCRIPTION OF REVISIONS	擔當
1	Revised Drawing	PYB	LHJ	19. 11. 13	2	Revised Drawing	LSH
2	Revised Drawing	LSH	LHJ	20. 01. 31	3	EC(RE-2-2059)	KYG
3	Revised Drawing	LSH	LHJ	20. 02. 17	4		

NO.	DESCRIPTIONS	MATERIAL	FINISH	REMARKS
9	Gasket	Silicone	Gray color	-
8	Potting	Silicone	Black color	-
7	Bottom shell	Stainless steel	Ni1.0μm Min.	-
6	Top shell	Stainless steel	Ni1.0μm Min.	-
5	Inner shell	Stainless steel	Cleansing	-
4	Contact 2nd	Copper alloy	Contact Area : Au0.05μm Min. over Pd-Ni0.75μm Min. over Ni2.0μm Min. Solder Tails : Au0.05μm Min. over Ni2.0μm Min.	-
3	Contact 1st			-
2	Mid plate	Stainless steel	Ni1.0μm Min.	-
1	Housing	Thermoplastic	Black color	-
CODE NO. (OLD)				RELEASED
DRAWN		DESIGNED	CHECKED	APPROVED
Y.B.PARK		Y.B.PARK	H.J.LEE	H.J.LEE
19.06.21		19.06.21	19.06.21	19.06.21
DRAWING NO. EDC3-632671				ENG 22.12.12 DEPT
PART NO. CX90MWD2G-24P				1/2
CODE NO CL 6240-0022-9				

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

