


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

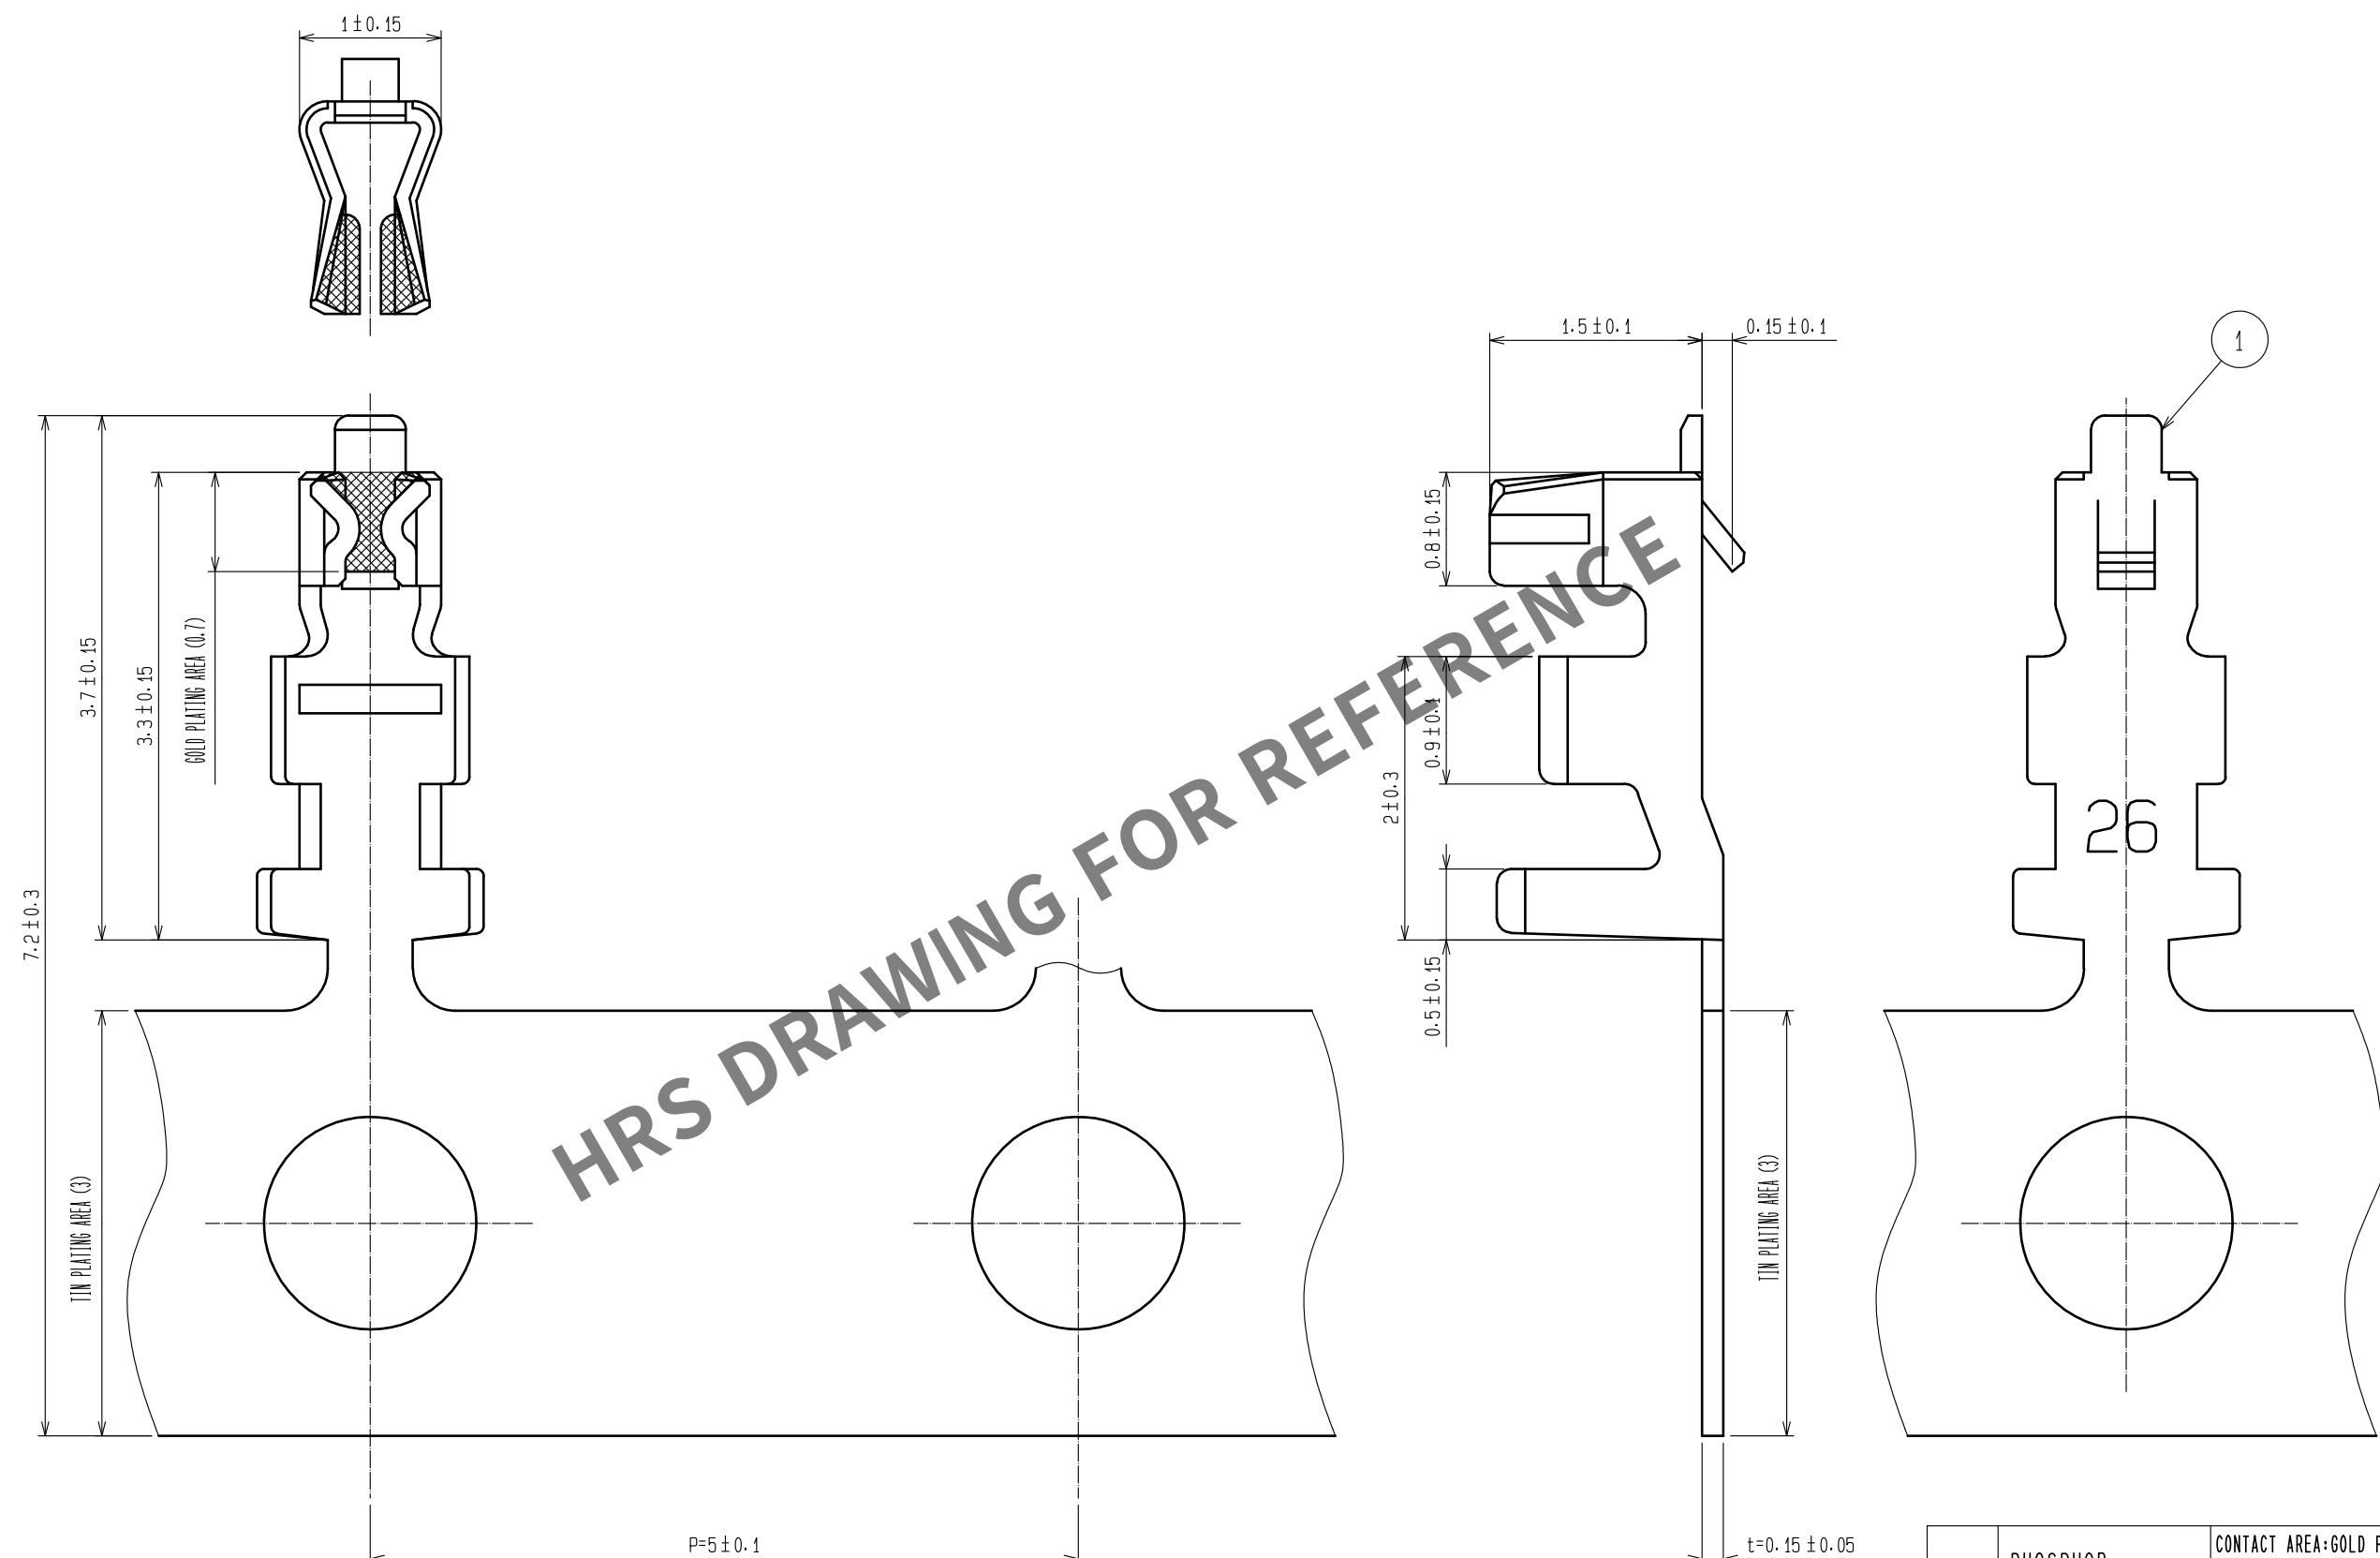

NOTES 1: APPLICABLE WIRE :26 - 30 AWG
△ OUTER DIAMETER :φ0.56 - φ1.0 mm
2: 1 REEL 10000 CONTACTS

t=0.15 ±0.05				1		PHOSPHOR BRONZE		CONTACT AREA:GOLD PLATING 0.2μm min CARRIER AREA:TIN PLATING 1μm min OTHERS:NICKEL PLATING 0.5μm min											
NO.		MATERIAL		FINISH . REMARKS				NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 20 : 1				COUNT 1		DESCRIPTION OF REVISIONS DIS-H-00004809				DESIGNED HT. SATO		CHECKED SZ. ONO		DATE 20190425	
HIROSE ELECTRIC CO., LTD.				APPROVED : TS. SAKATA				20090915				DRAWING NO. EDC-071220-04-06							
				CHECKED : TS. FUKUSHIMA				20090914				PART NO. DF13-2630SCFA(04)							
				DESIGNED : KT. ISHII				20090911				CODE NO. CL536-0298-5-04							
				DRAWN : YK. NAKATSU				20090909				1 1							