

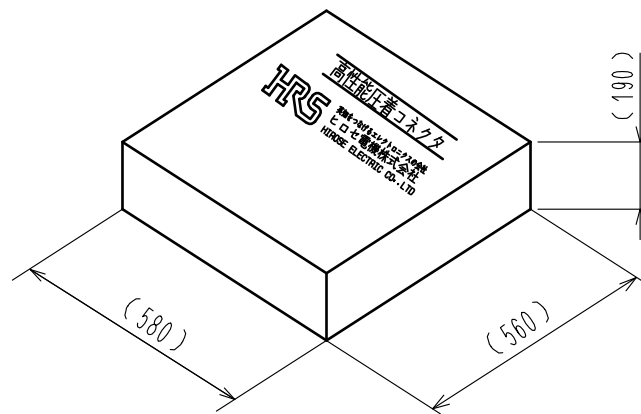


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

△ ③ Style and dimension of box

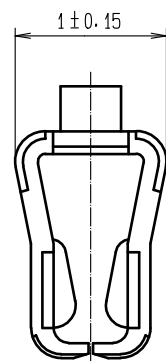

△ ③ Style and dimension of reel


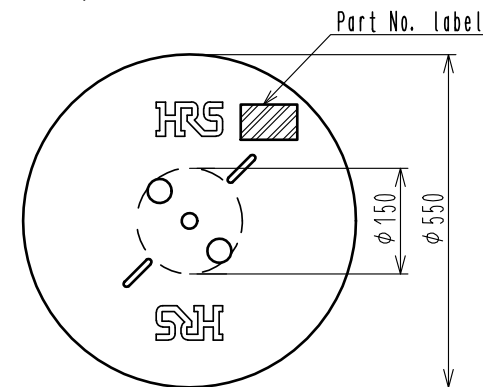


Detail of part No. label

HRS		検査
品名コード	CL536-0643-1-00	
品名	DF136-2630SCF	
数量	10000	
仕様		
LOT No.		
継ぎ目		

Section
Lot No.
Specification
Quantity
Part No.
Code No.

Inspection

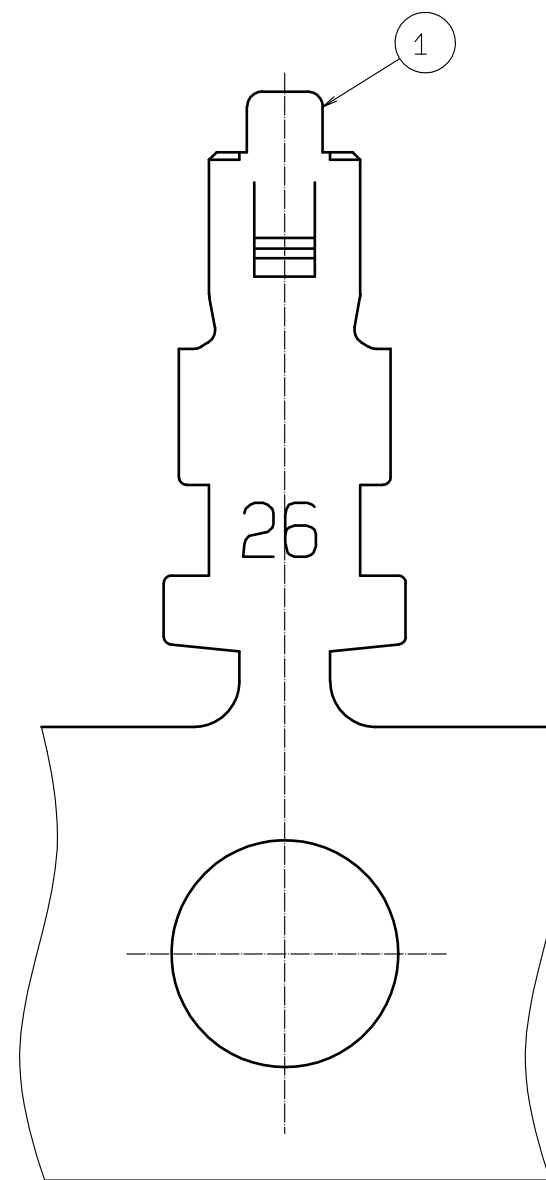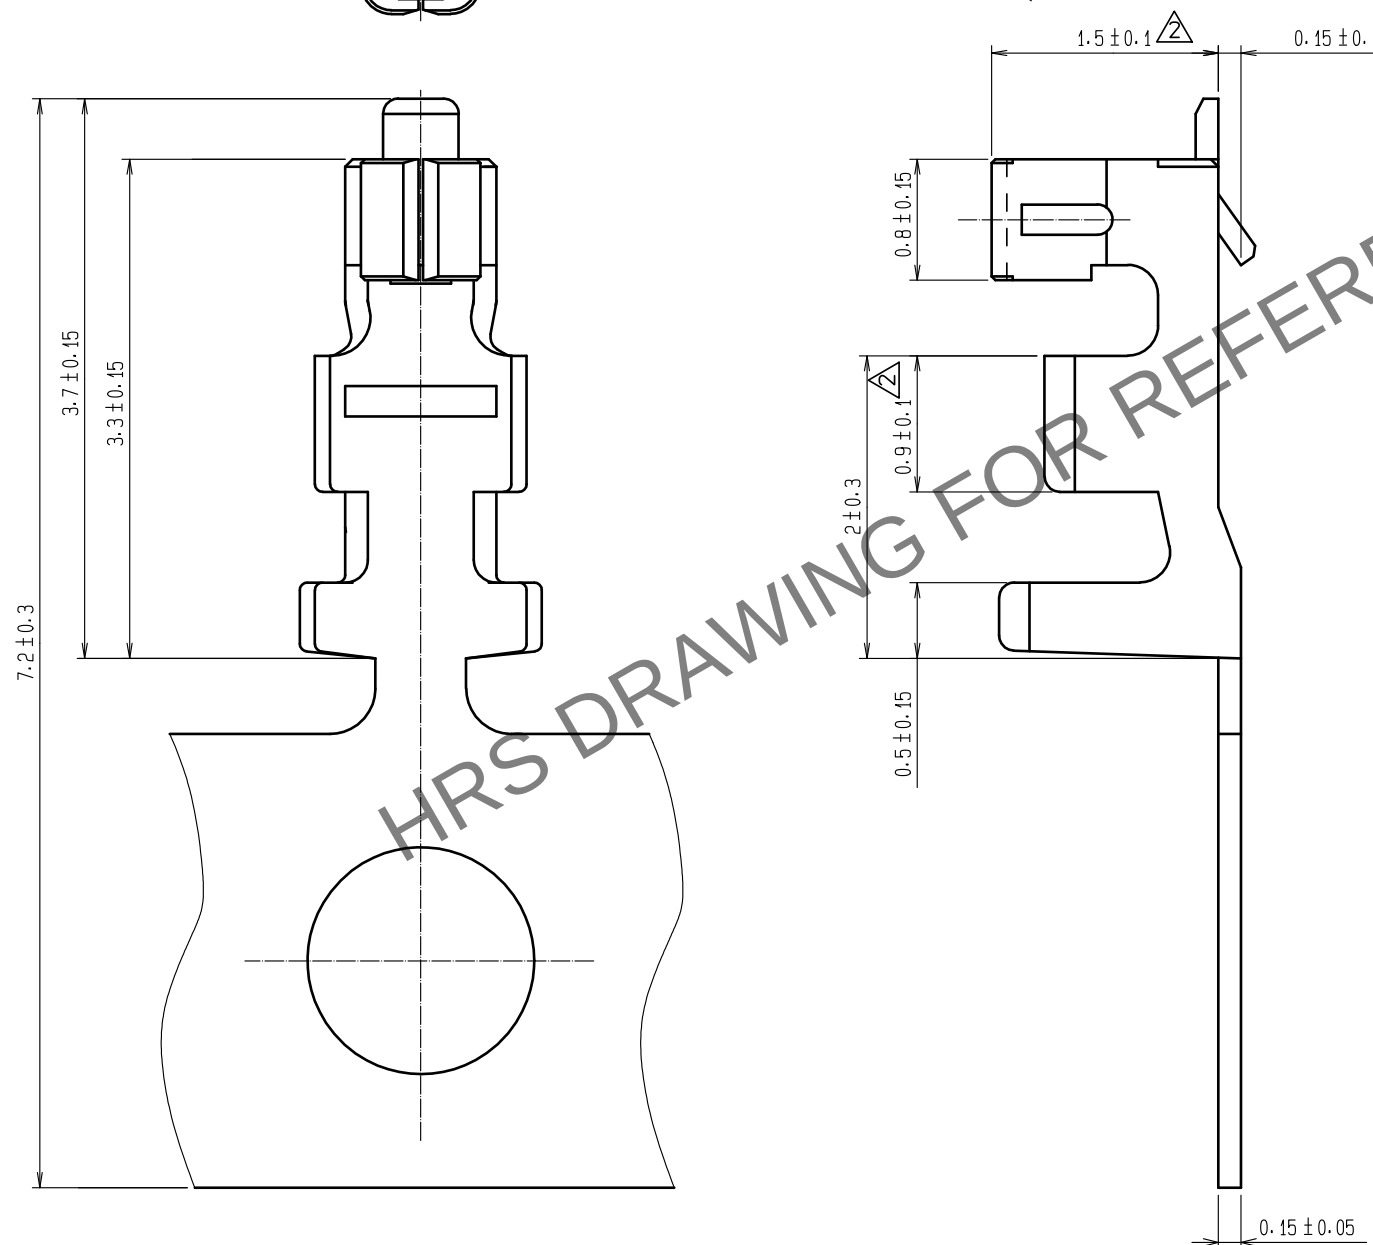

△ Note 1. Applicable wire : 26 to 30 AWG
Outer diameter : $\phi 0.56$ to 1.0mm


2. 1 reel:10000 contacts.

△ ③ Style of reel and box are shown in figure.

△ 4. A maximum of 5 reels are packed up in one box.

△ 5. Please be sure to check the form of crimping using a cable when you adjust applicator.

△ 6. Refer to the technical specification(ATAP-H0373-00)for the packing type.

				1	Phosphor bronze		Tin plating 1μm min					
NO.		MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS		
UNITS mm			SCALE 20 : 1		COUNT 9	DESCRIPTION OF REVISIONS DIS-H-00004839			DESIGNED HT. SATO		CHECKED SZ. ONO	DATE 20190513
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA				20120216	DRAWING NO.	EDC-162517-00-01				
		CHECKED : HK. UMEHARA				20120216	PART NO.	DF136-2630SCF				
		DESIGNED : HT. SATO				20120216	CODE NO.	CL536-0643-1-00				
		DRAWN : HT. SATO				20120216		 1				