


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

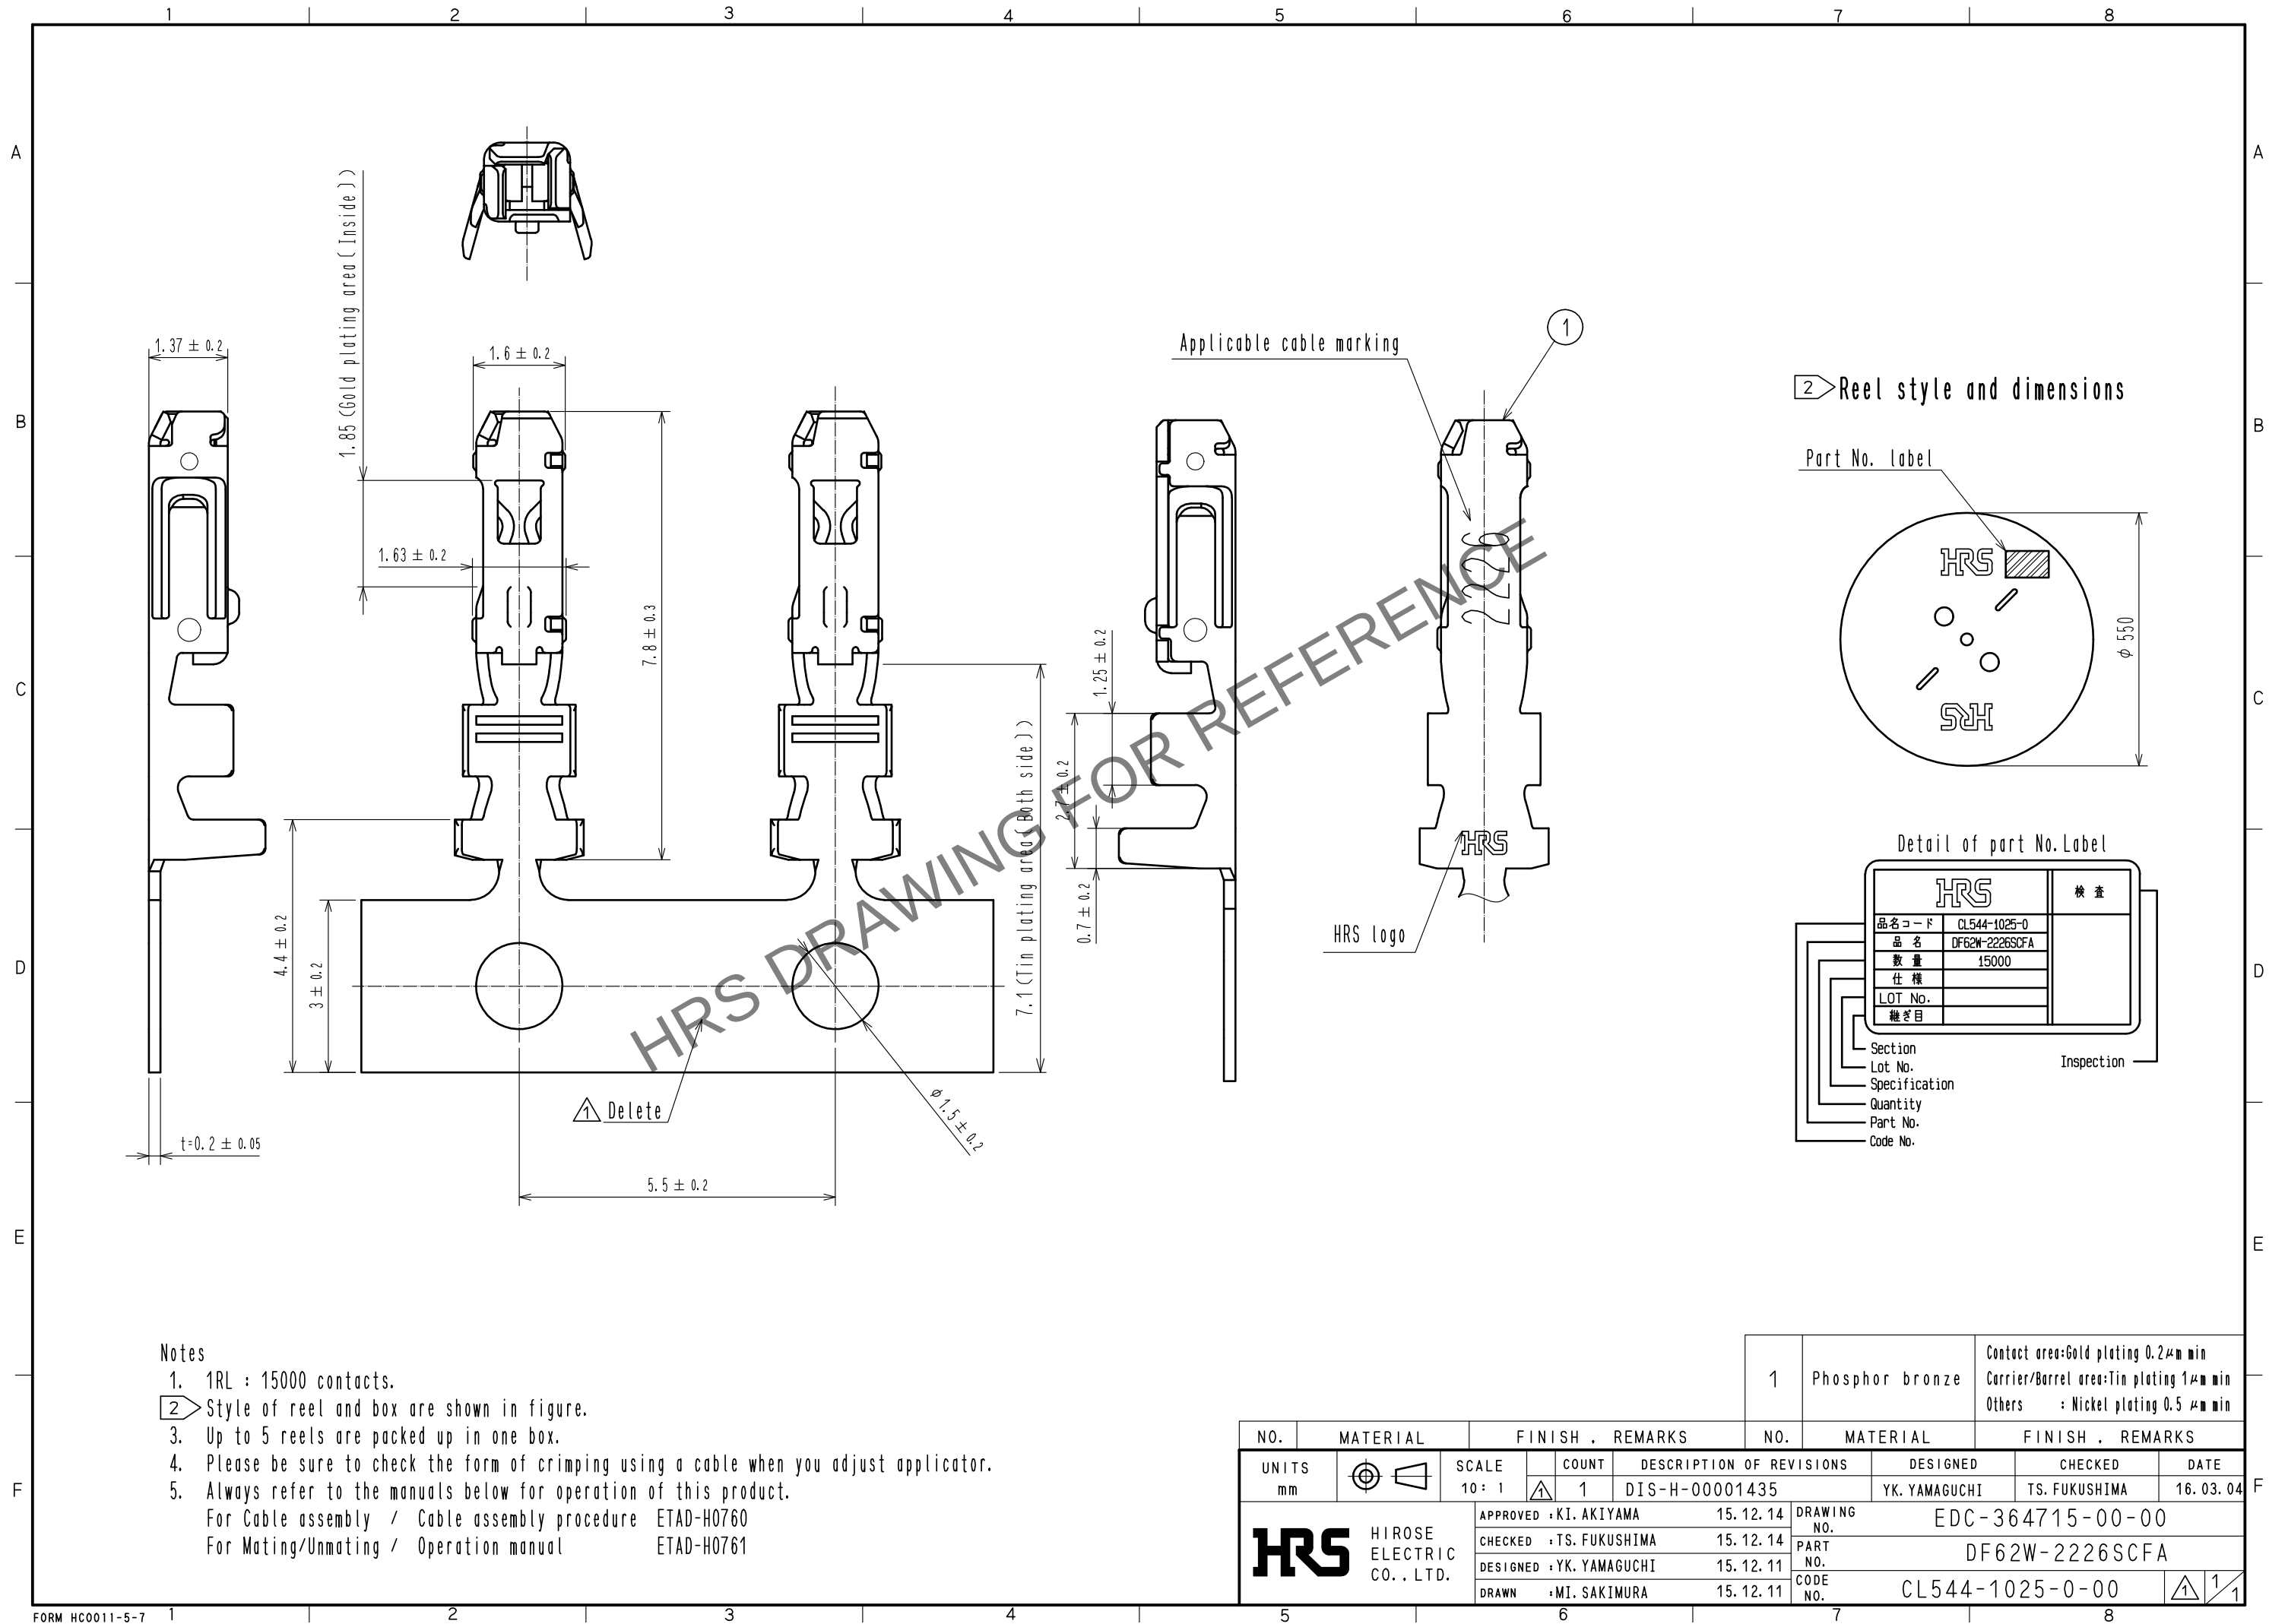

- Notes
- 1RL : 15000 contacts.
 - Style of reel and box are shown in figure.
 - Up to 5 reels are packed up in one box.
 - Please be sure to check the form of crimping using a cable when you adjust applicator.
 - Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
1		Phosphor bronze		Contact area:Gold plating 0.2μm min Carrier/Barrel area:Tin plating 1μm min Others : Nickel plating 0.5 μm min							
UNITS mm		SCALE 10 : 1		COUNT 1		DESCRIPTION OF REVISIONS DIS-H-00001435		DESIGNED YK. YAMAGUCHI		CHECKED TS. FUKUSHIMA	
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		15.12.14		DRAWING NO. EDC-364715-00-00			
				CHECKED : TS. FUKUSHIMA		15.12.14		PART NO. DF62W-2226SCFA			
				DESIGNED : YK. YAMAGUCHI		15.12.11		CODE NO. CL544-1025-0-00			
				DRAWN : MI. SAKIMURA		15.12.11					