

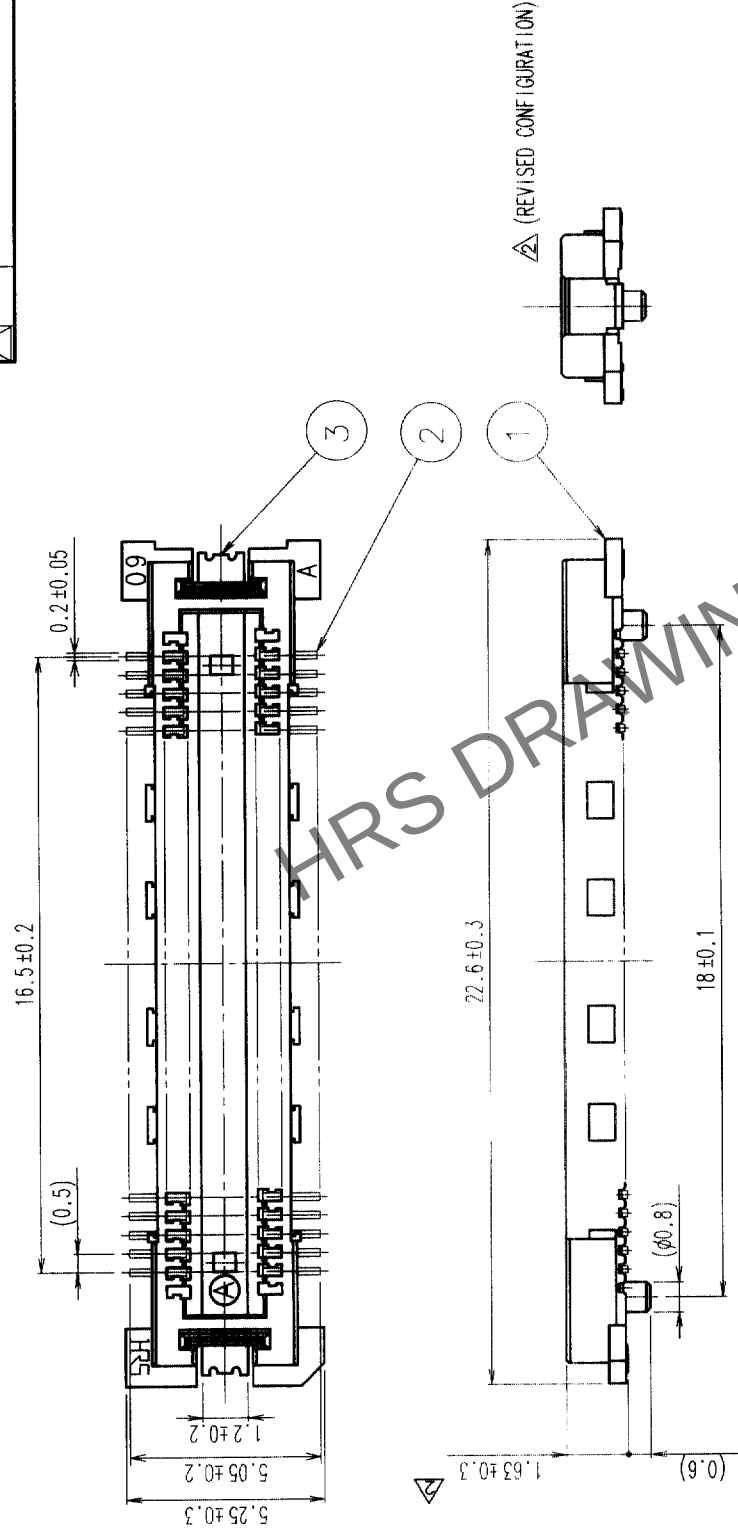


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
A	3	RE-F-06374	J.M.	M.I	99.05.15					.
A	3	RE-F-06522	J.M.	m.d	99.9.7					.
					.					.

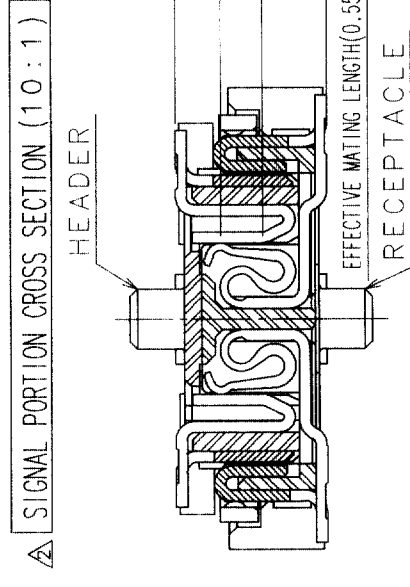

RECOMMENDED LAND PATTERN DIMENSION OF PCB

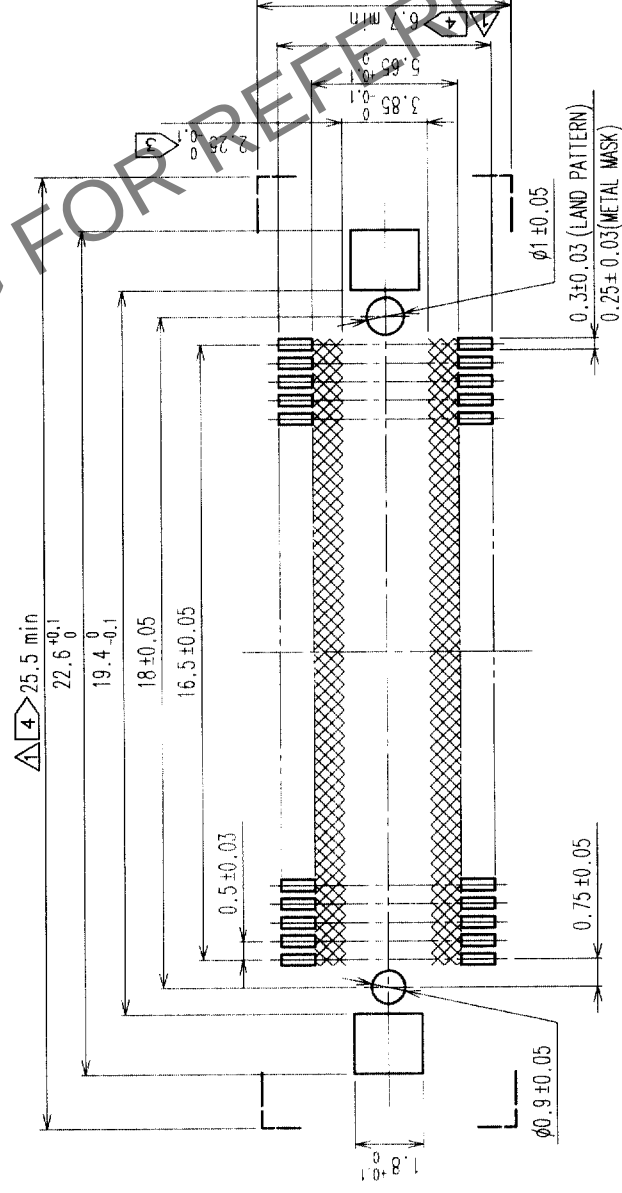

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	BEIGE UL94V-0
		FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		J. Matsukawa	J. Matsukawa	Y. Yoshimura	Y. Yoshimura	
		990212	990212	990212	990212	

	DRAWING NO.		PART NO.	
	EDC3-152100		FX11LA-68P-SV	
SCALE	5 : 1		CODE NO.	
UNITS	mm		CL573-0042-1	
HRS			HIROSE ELECTRIC CO., LTD.	
			1 / 1	

NOTES 1 SMT LEAD-COPLANARITY:0.1 MAX.
2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR
LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
④ DO NOT MOUNT OTHER DEVICES ONTO  AREA, OR MATING PAIR
CANNOT BE MATED.

TO	PCK			
----	-----	--	--	--