

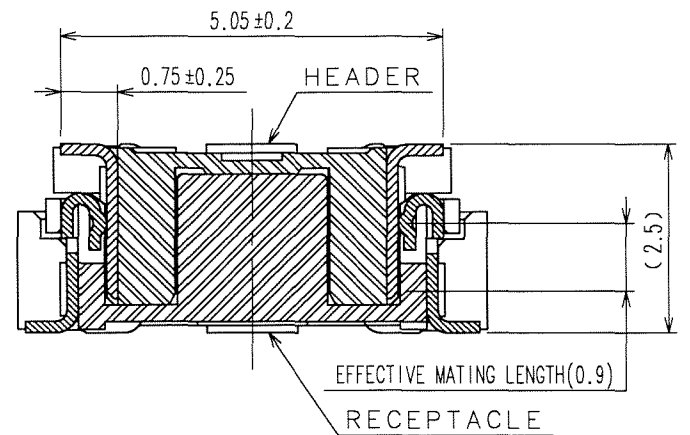

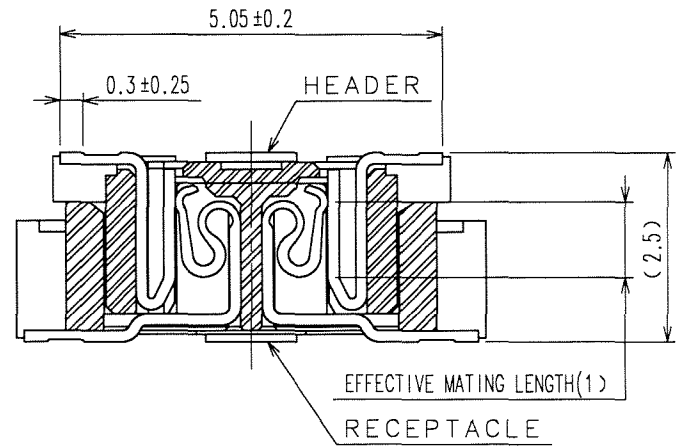




	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

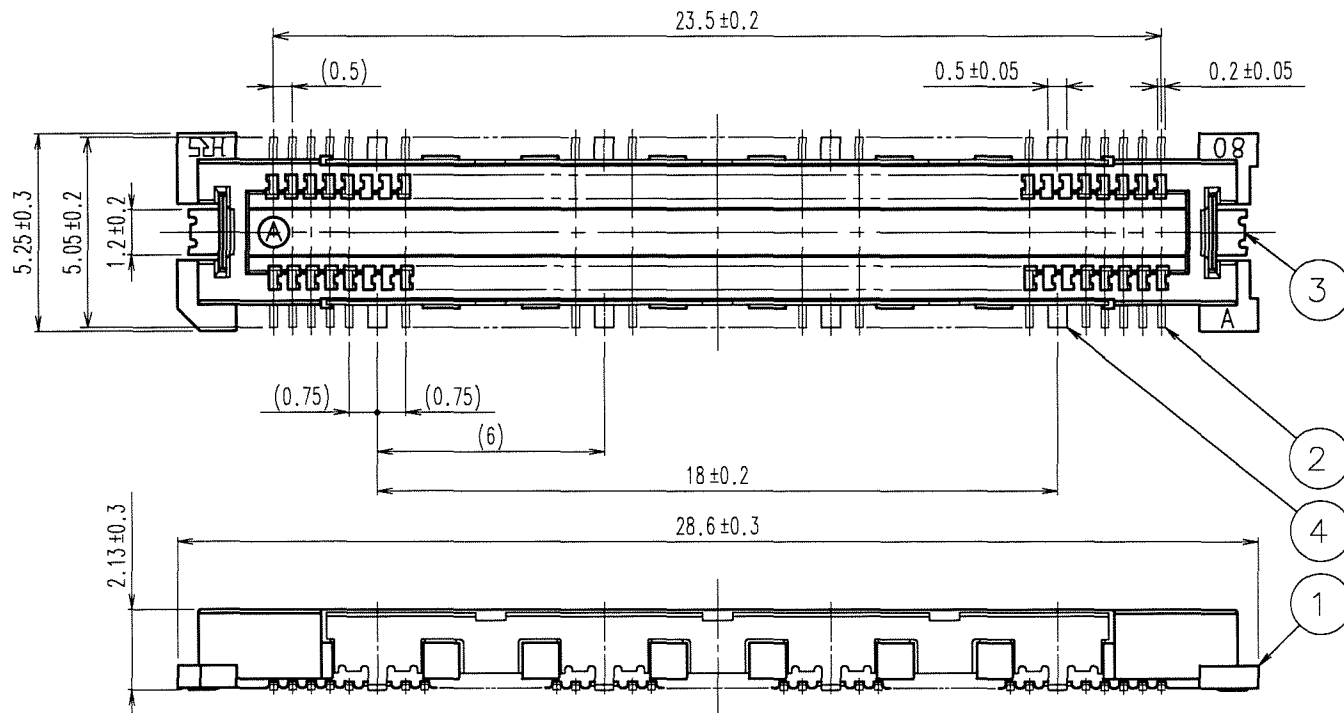

RECOMMENDED LAND PATTERN DIMENSION OF PCB

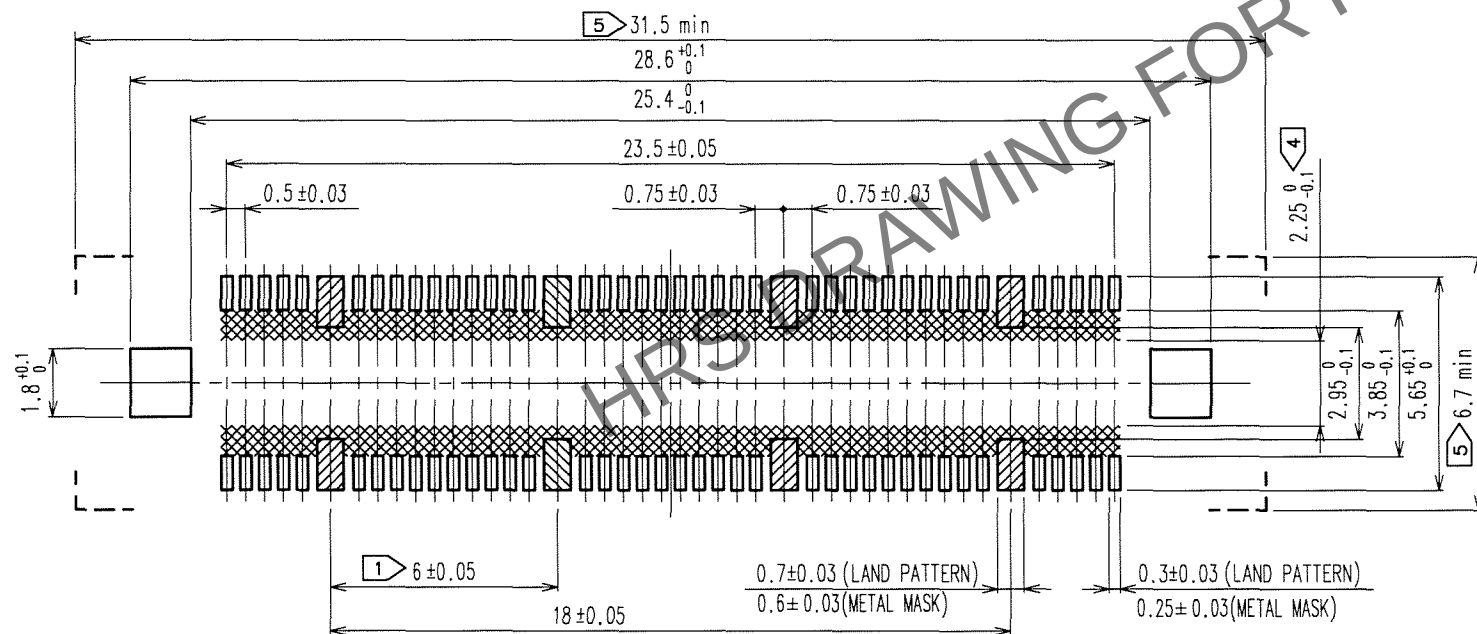

- NOTES
- 1 8 HATCHED  PARTS:GROUND CIRUIT.
 - 2 SMT LEAD-COPLANARITY:0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4		PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm min.		
1		LCP	BEIGE			UL94V-0	LEAD AREA:GOLD FLASH	
NO.		MATERIAL	FINISH, REMARKS			UNDER PLATING:NICKEL 1 μm min.		
CODE NO. (OLD)		CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
				S.KAMIGA 06.05.13	H. Nakamura 06.05.13	M. Ogasawara 06.05.13	H. Okawa 06.05.13	
		DRAWING NO.			PART NO.			
SCALE		EDC3-152602-25			FX11B-80P/8-SV(71)			
5 : 1		 HIROSE ELECTRIC CO.,LTD.			CODE NO.			1 1
UNITS					CL573-0513-6-71			
mm								