
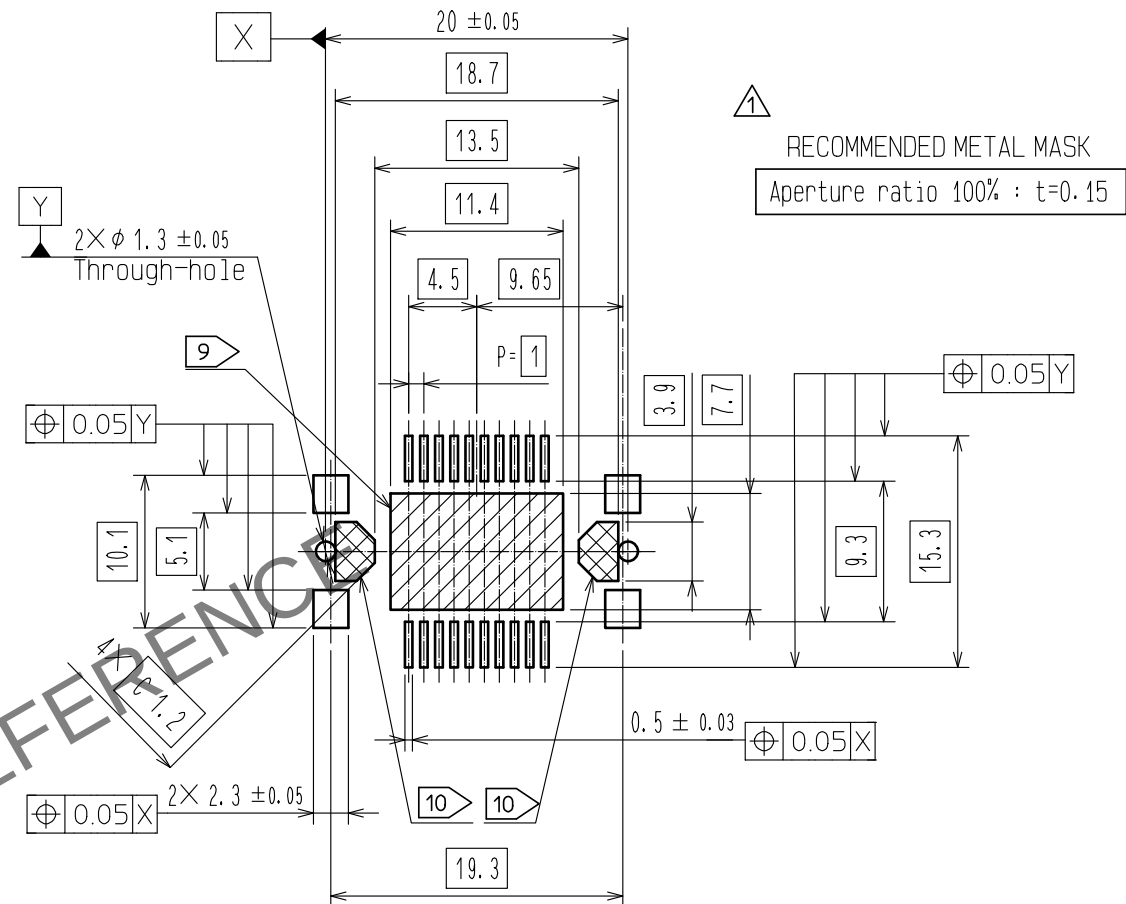
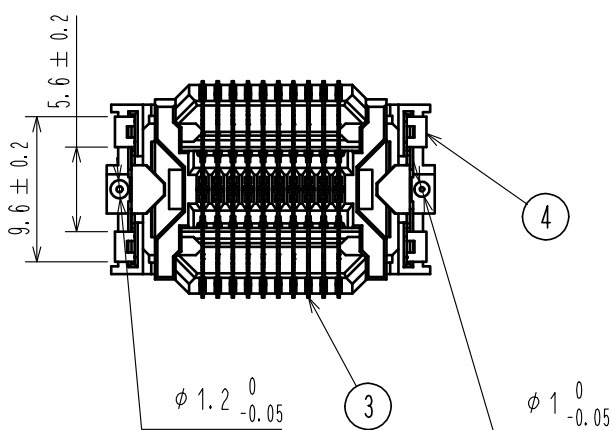

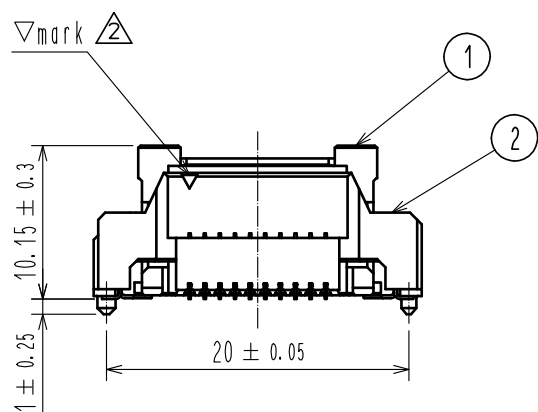


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




RECOMMENDED LAND PATTERN DIMENSION OF PCB

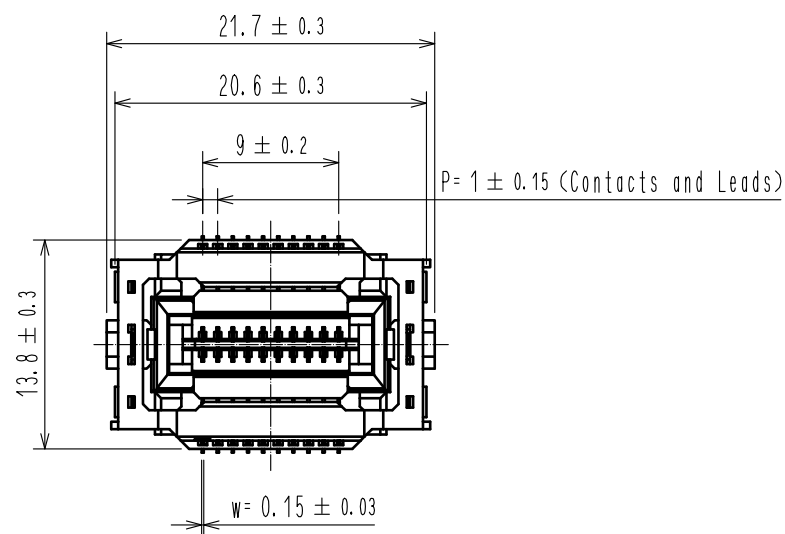


- Note
- 1 Lead CO-Planarity is 0.1mm MAX.
 - 2 Floating range of this connector is ±0.7mm MAX.
The maximum cycle time of the floating operation is in accordance with the mating cycle of the connector.
 - 3 Please use the connectors within the specified PCB distance.
Please refer to the drawings of mating connector.
 - 4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.
 - 5 The dimensions in parentheses are for references.
 - 6 This is packaged in embossed carrier tape. (250pcs/RL)
 - 7 It shows the vacuum pickup area. Remove the pickup cap before mating connectors.
 - 8 This connector has no polarity with the mating connector.
 - 9 Arrangement of via-hole is prohibited in area.
 - 10 Arrangement of pattern and via-hole are prohibited in area.

1, 2	POLYAMIDE	BLACK UL94V-0	7	POLYAMIDE	(CAP FOR VACUUM PICKUP)
NO.	MATERIAL	FINISH . REMARKS	6	POLYESTER	(EMBOSSED COVER TAPE)
UNITS mm		SCALE 2 : 1	5	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
	COUNT 2	DESCRIPTION OF REVISIONS DIS-F-00006551	4	PHOSPHOR BRONZE	OVER PLATING : TIN-PLATING 1μm UNDER PLATING: NICKEL 0.5μm
APPROVED : HH. SHINDO	20190918	DESIGNED KI. YAMAZAKI	3	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm LEAD AREA : GOLD 0.03μm UNDER PLATING: NICKEL 1μm
CHECKED : HH. SHINDO	20190918	DESIGNED KT. DOI	NO.	MATERIAL	FINISH . REMARKS
DESIGNED : KI. YAMAZAKI	20190918	DRAWN : KI. YAMAZAKI	DRAWING NO.	EDC-376627-00-00	
HRS HIROSE ELECTRIC CO., LTD.			PART NO.	FX26-20P-1SV	
			CODE NO.	CL576-1002-0-00	
				1/2	

6 DRAWING FOR PACKING (2:1)

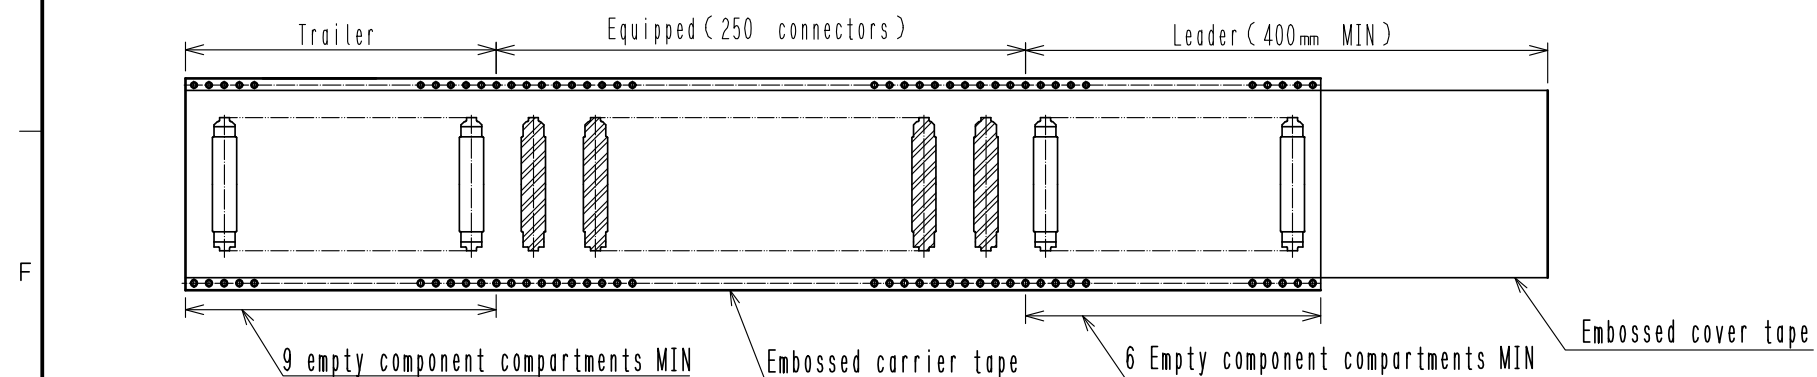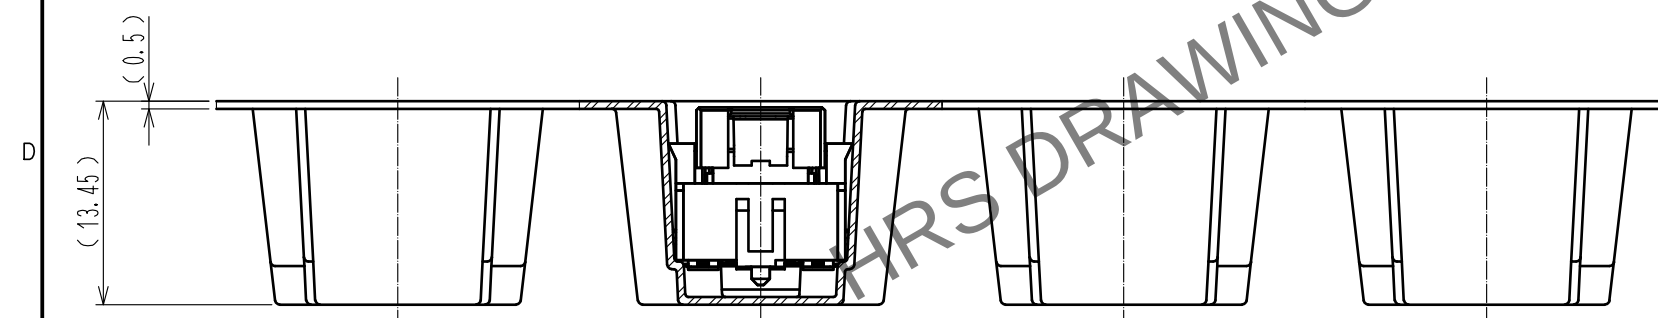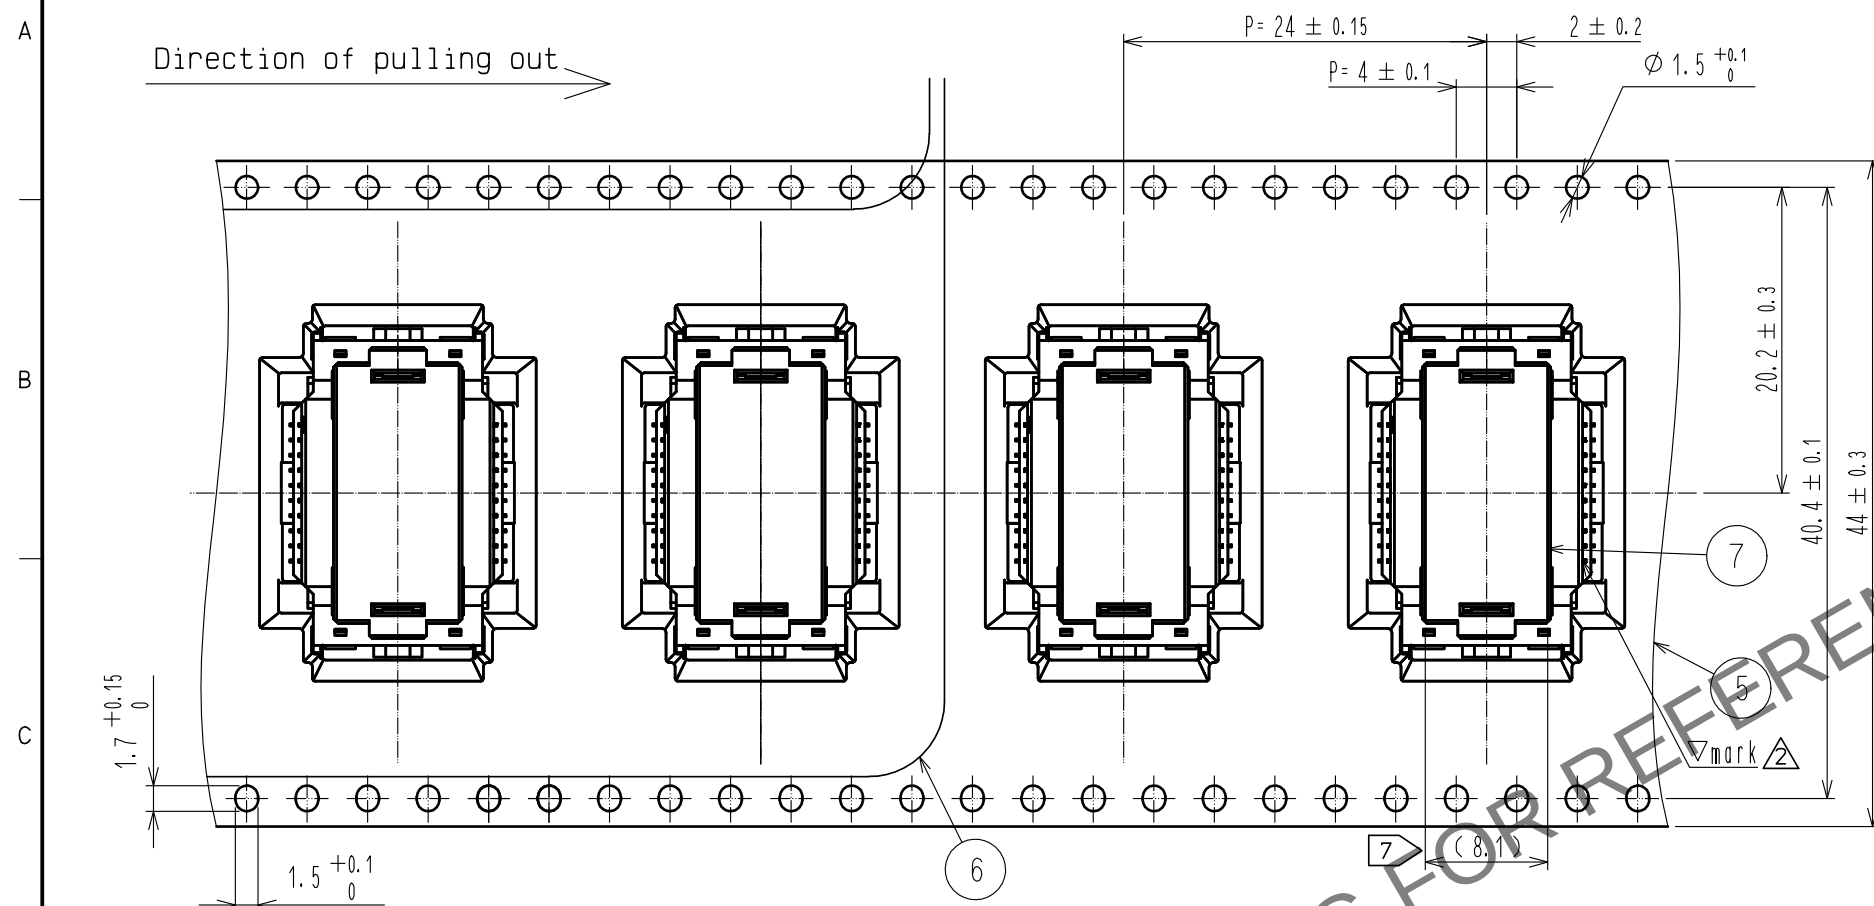

REEL DIMENSION(No scale)

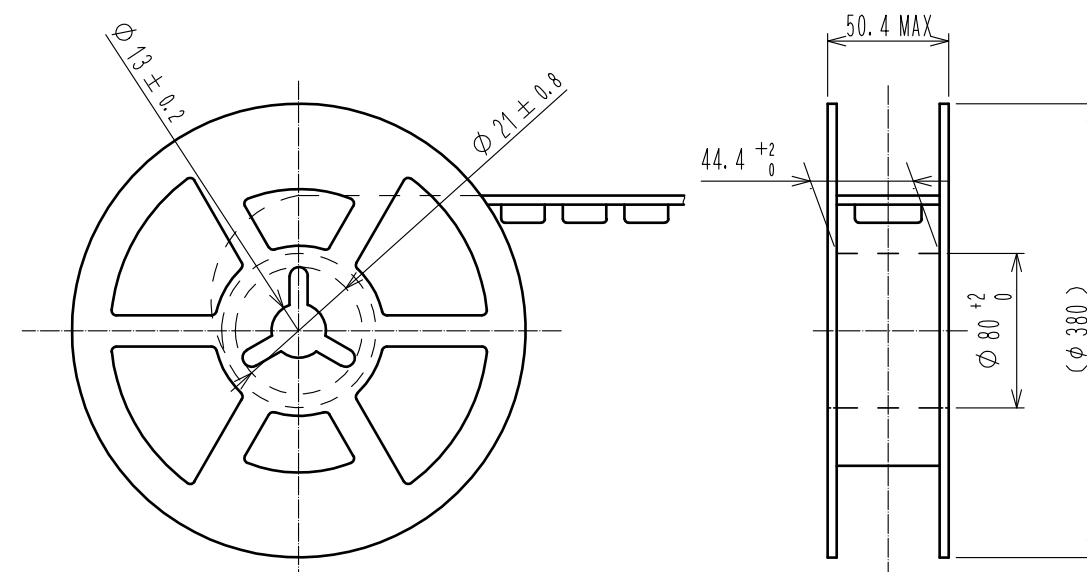

HRS	DRAWING NO. EDC-376627-00-00	
	PART NO. FX26-20P-1SV	
	CODE NO. CL576-1002-0-00	 