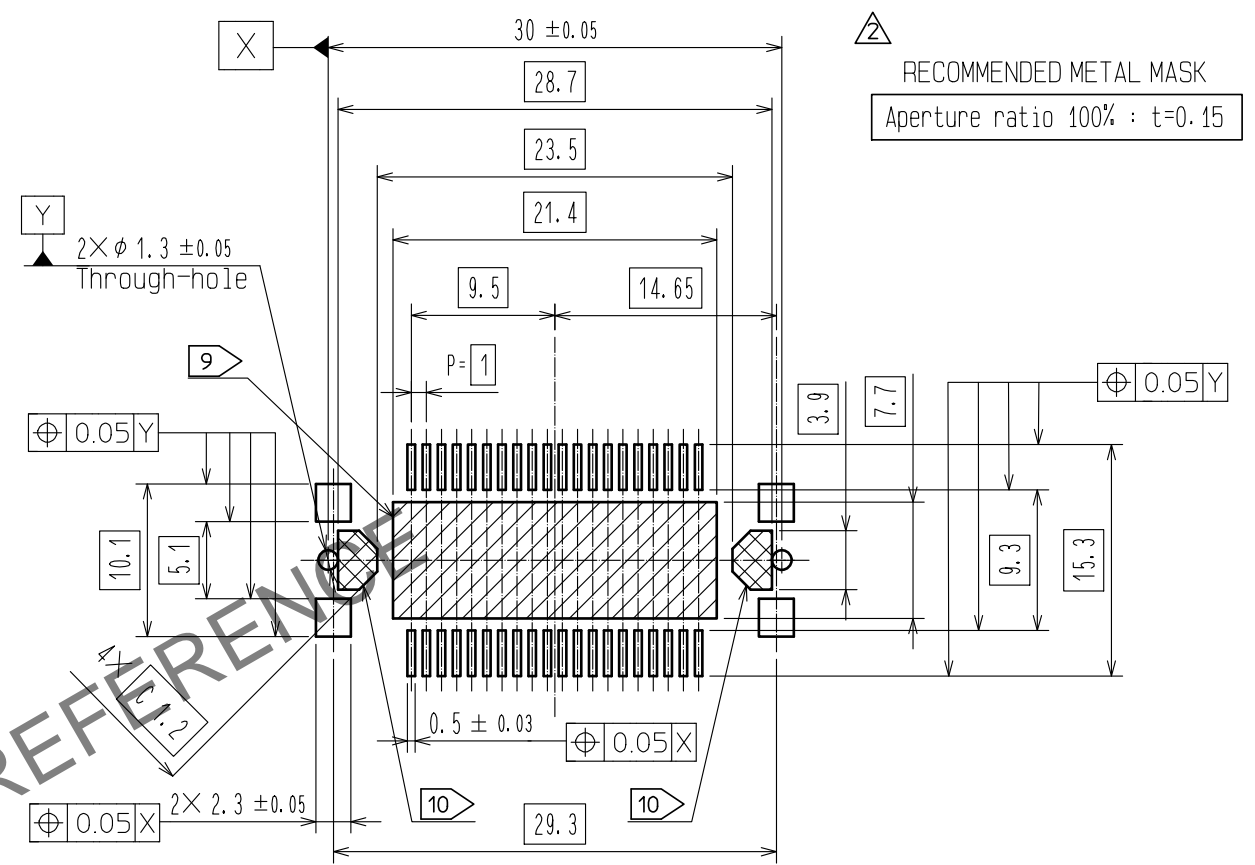
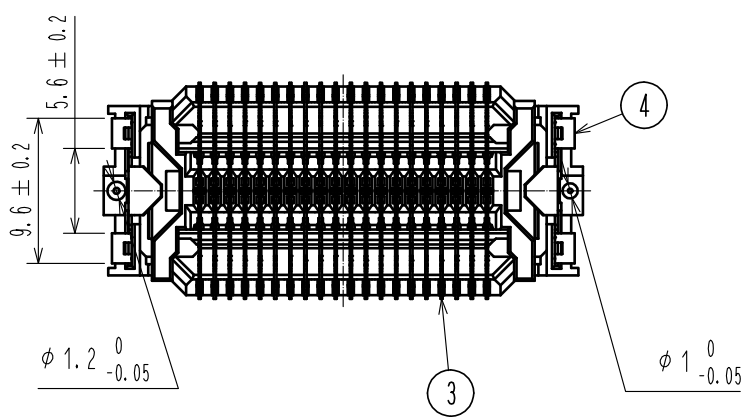

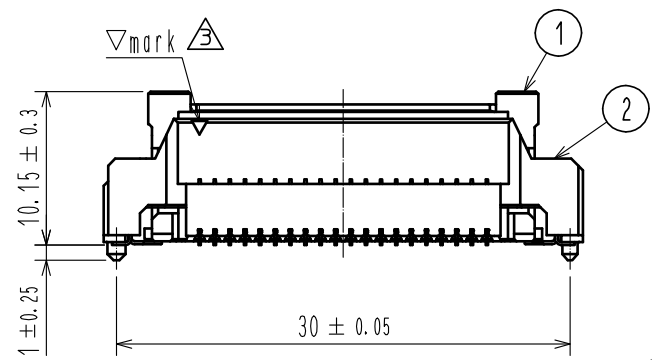
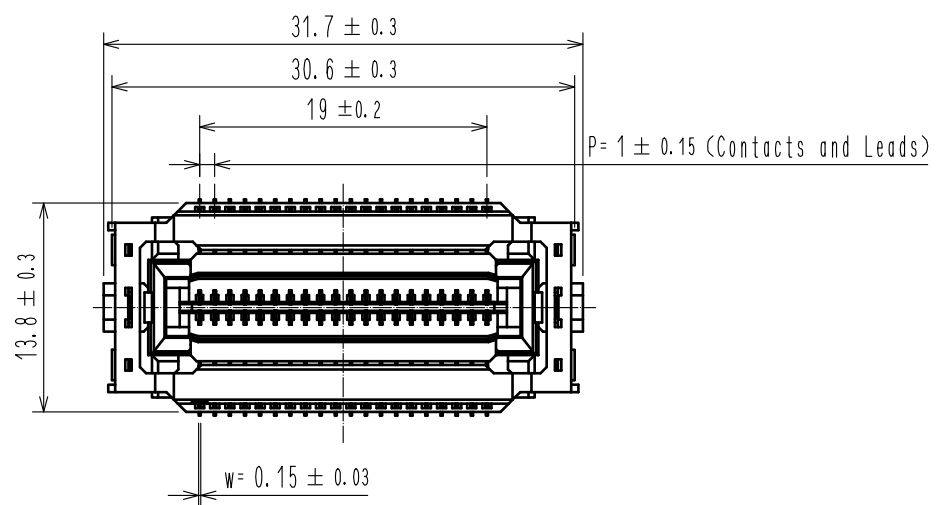


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



RECOMMENDED LAND PATTERN DIMENSION OF PCB






- Note
- 1 Lead CO-Planarity is 0.1mm MAX.
 - 2 Floating range of this connector is ±0.7mm MAX.
The maximum cycle time of the floating operation is in accordance with the mating cycle of the connector.
 - 3 Please use the connectors within the specified PCB distance.
Please refer to the drawings of mating connector.
 - 4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.
 - 5 The dimensions in parentheses are for references.
 - 6 This is packaged in embossed carrier tape. (250pcs/RL)
 - 7 It shows the vacuum pickup area. Remove the pickup cap before mating connectors.
 - 8 This connector has no polarity with the mating connector.
 - 9 Arrangement of via-hole is prohibited in [hatched] area.
 - 10 Arrangement of pattern and via-hole are prohibited in [cross-hatched] area.

			7	POLYAMIDE	(CAP FOR VACUUM PICKUP)
			6	POLYESTER	(EMBOSSED COVER TAPE)
			5	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
			4	PHOSPHOR BRONZE	OVER PLATING :TIN-PLATING 1μm UNDER PLATING:NICKEL 0.5μm
			3	COPPER ALLOY	CONTACT AREA :GOLD 0.1μm LEAD AREA :GOLD 0.03μm UNDER PLATING:NICKEL 1μm

1, 2	POLYAMIDE	BLACK UL94V-0	NO.	MATERIAL	FINISH . REMARKS
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	 2	DESCRIPTION OF REVISIONS DIS-F-00006551	DESIGNED KI. YAMAZAKI	CHECKED KN. SHIBUYA	DATE 20200831
-------------	---------------------------------------------------------------------------------------	----------------	-----------------------------------------------------------------------------------------	--------------------------------------------	--------------------------	------------------------	------------------




 HIROSE ELECTRIC CO., LTD.	APPROVED :HH. SHINDO	20190902	DRAWING NO. EDC-376629-00-00	
	CHECKED :KN. SHIBUYA	20190902	PART NO. FX26-40P-1SV	
	DESIGNED :TK. ABE	20190902	CODE NO. CL576-1004-0-00	
	DRAWN :KI. YAMAZAKI	20190902	 1	

		 1	2
--	--	-----------------------------------------------------------------------------------------	---


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

6 DRAWING FOR PACKING(2:1)

Direction of pulling out →

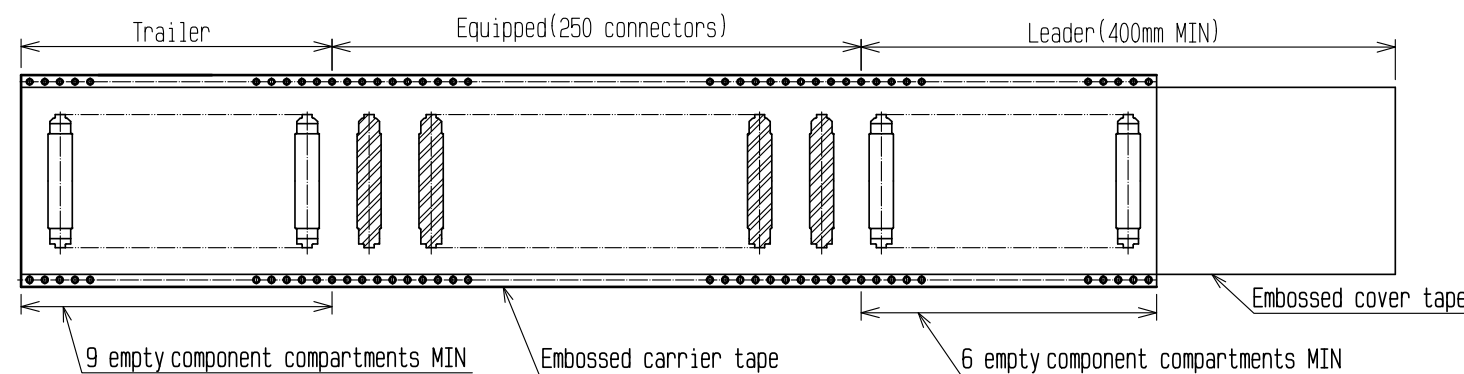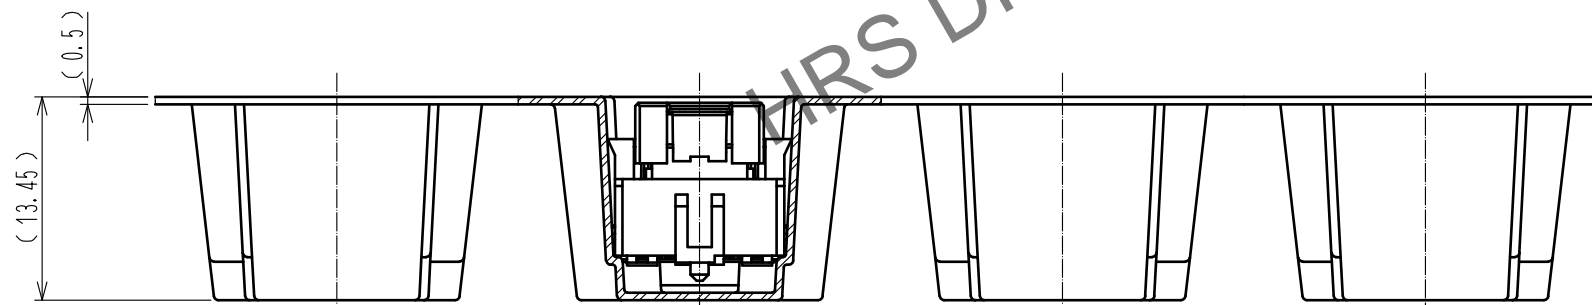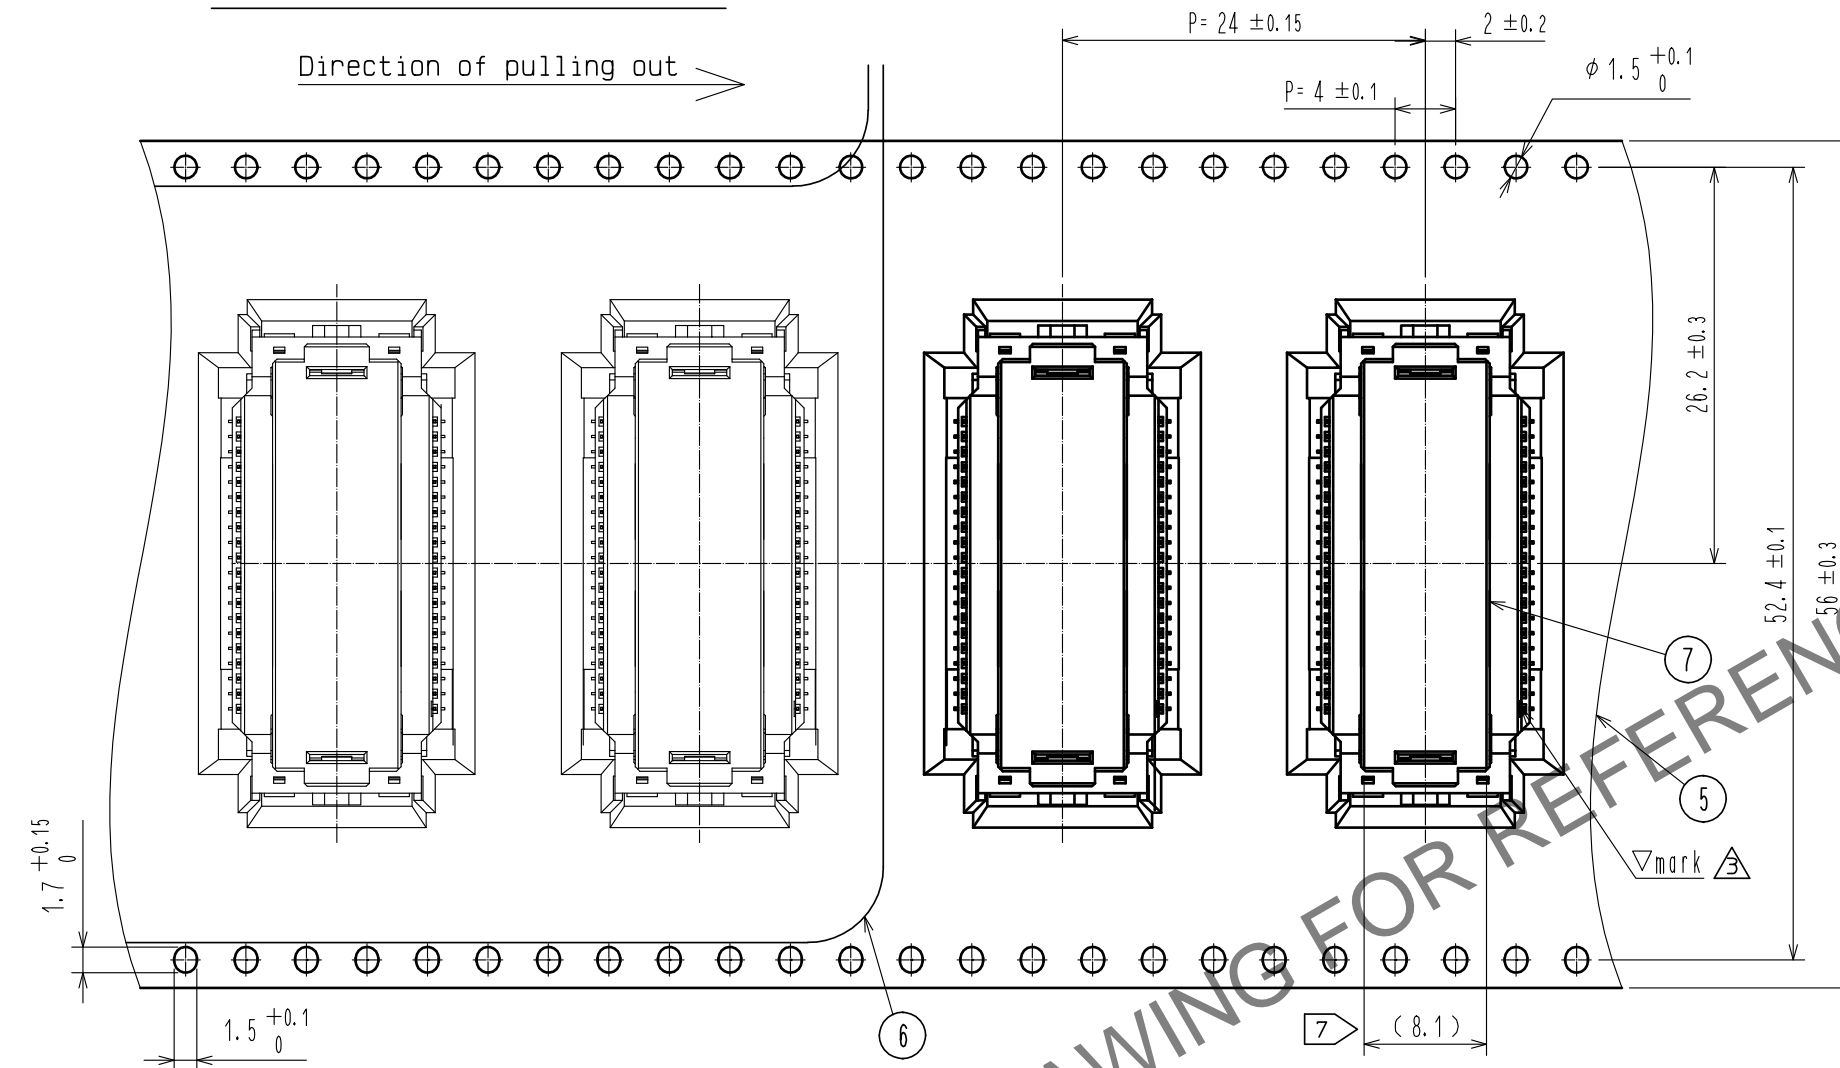

REEL DIMENSION(No scale)

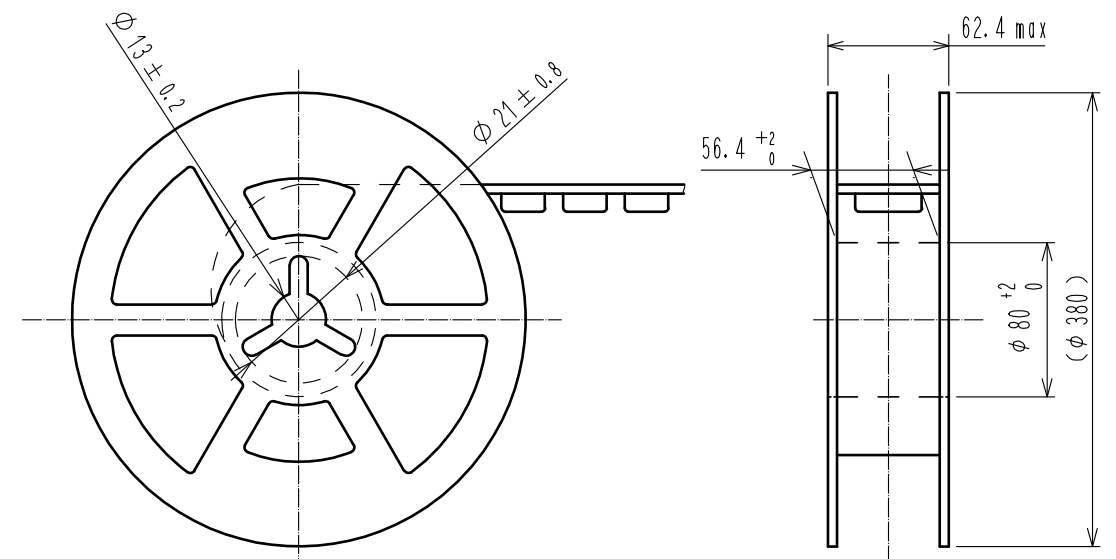

HRS

DRAWING NO.	EDC-376629-00-00
PART NO.	FX26-40P-1SV
CODE NO.	CL576-1004-0-00

3/2