

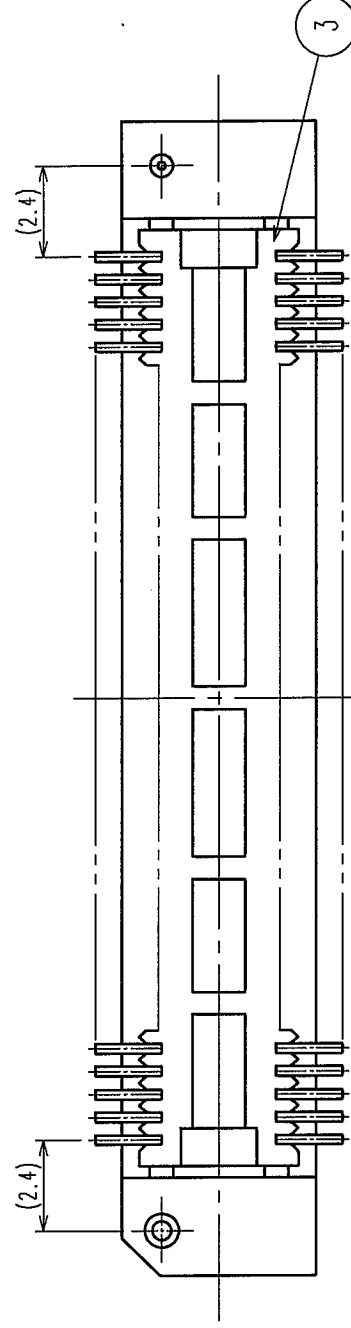
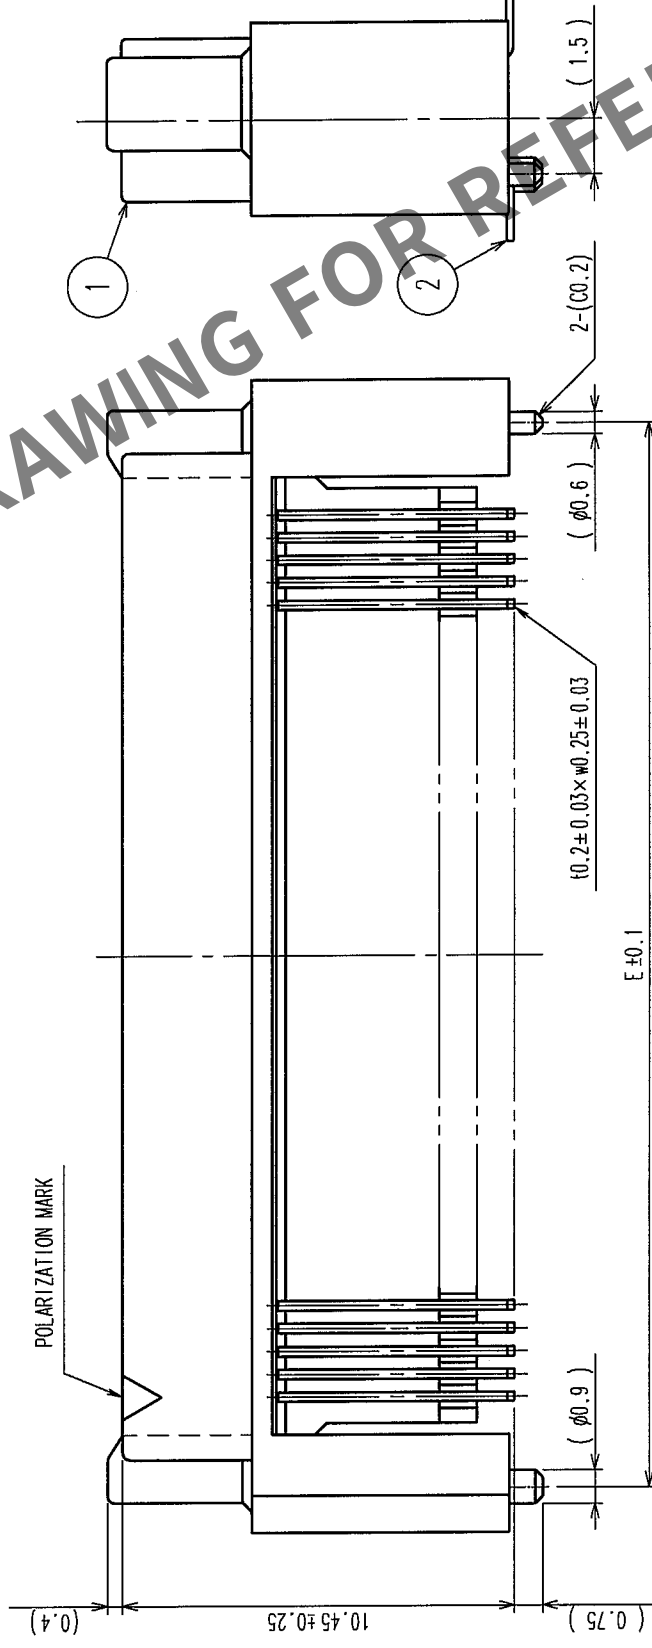


	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△	3	RE-F-09671	K.N	H.Y	04.04.08	△				
△						△				
△						△				
△						△				

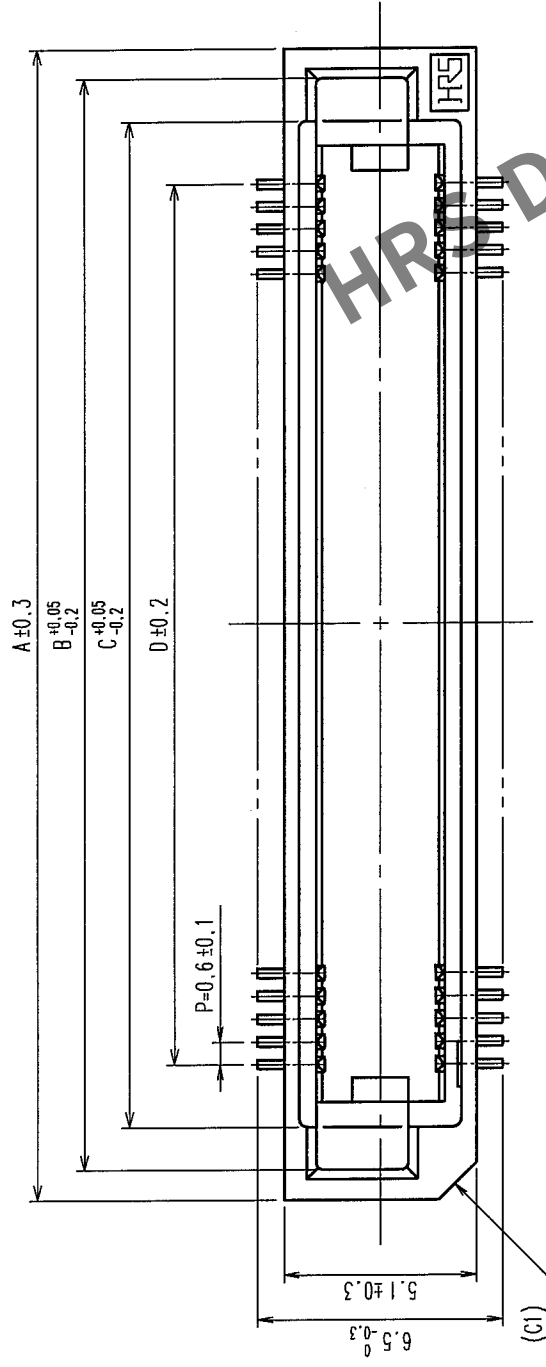

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

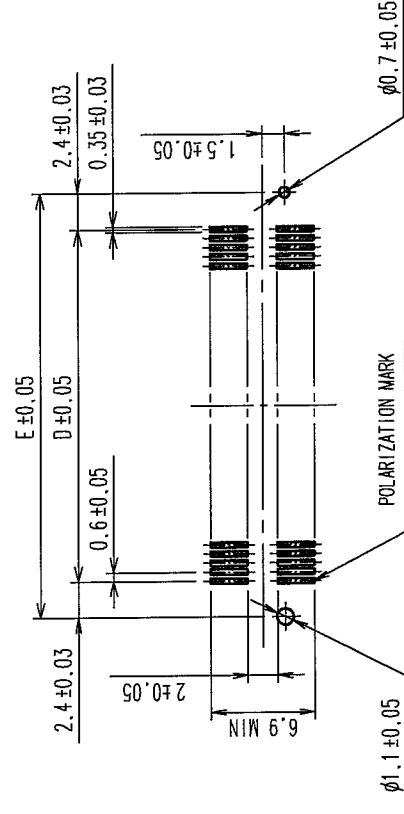

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.		CODE No.	6	7	A	B	C	D	E
FX8C- 60P-SV6 (93)		CL578-0601-3-93	60	×	24.60	23.00	20.70	17.40	22.20
FX8C- 80P-SV6 (93)		CL578-0603-9-93	80	×	30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV6 (93)		CL578-0605-4-93	100	×	36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV6 (93)		CL578-0606-7-93	120	—	42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV6 (93)		CL578-0607-0-93	140	—	48.60	47.00	44.70	41.40	46.20

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
4. FOR MODIFICATION, ETC, PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED
ACCORDING TO CIRCUMSTANCES.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
⑥ NUMBER OF CONTACTS.
⑦ EXISTENCE
× : PRODUCED, - : NO PRODUCED

1, 3	PPS	LIGHT BROWN (UL94V-0)			2	PHOSPHOR BRONZE		CONTACT AREA: GOLD 0.1μ m min	
								LEAD AREA: TIN-PLATING 1μ m min	
								UNDER PLATING: NICKEL 1μ m min	
NO.	MATERIAL	FINISH, REMARKS			NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL									
			S. SUZUKI	K. NAKAMURA	H. OKAWA	Y. YOSHIMURA			
			03.02.04	03.02.12	03.02.14	03.02.15			
DRAWING NO.		PART NO.			FX8C- * P-SV6 (93)				
SCALE		EDC3-151090-23							
FREE									
UNITS		HIROSE ELECTRIC CO., LTD			CODE NO.		CL578		
mm							1/2		

