
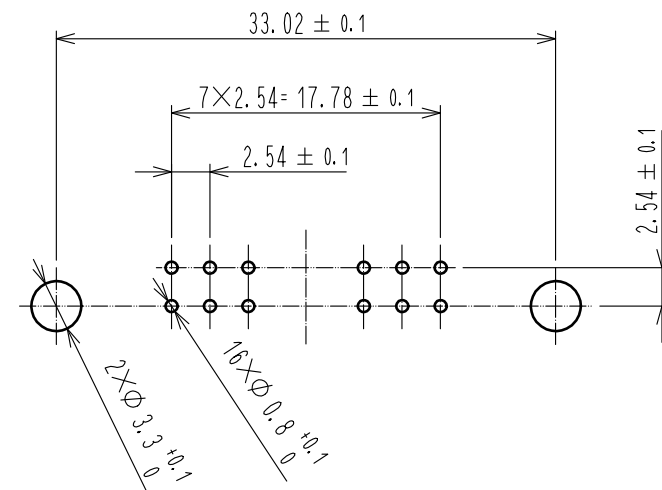
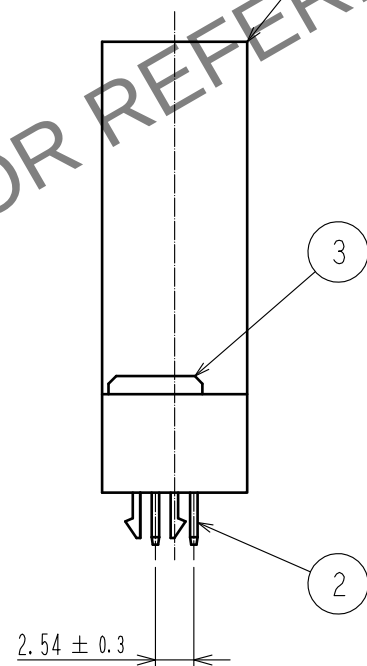
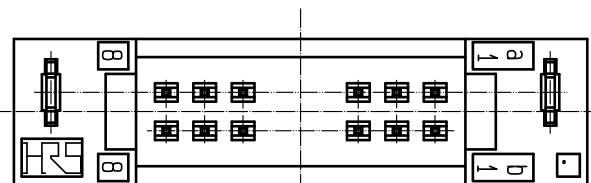
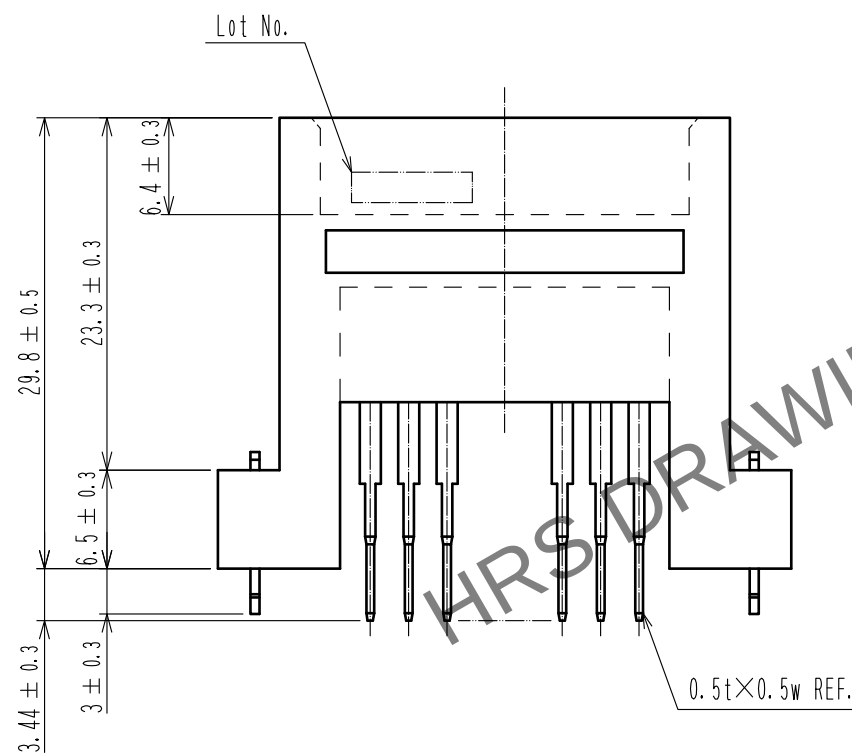


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
B
C
D
E
F

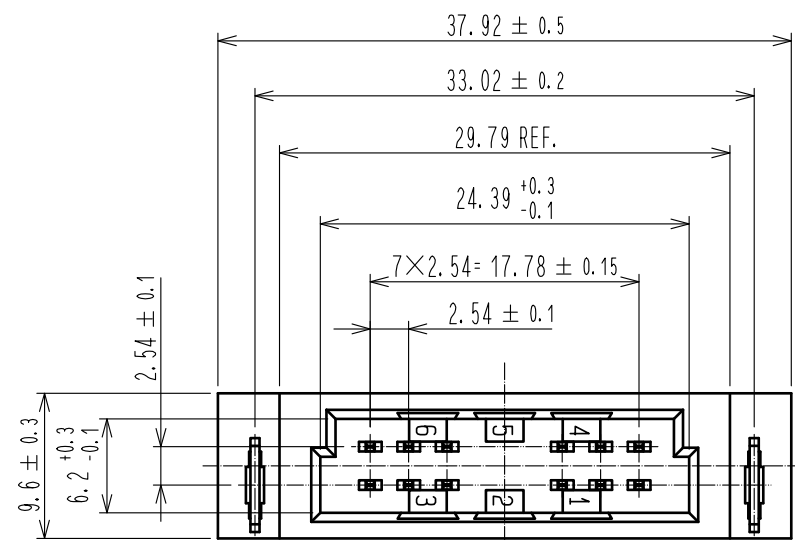

Recommended P.C.B hole pattern($t=1.6 \pm 0.1$)

Note 1 UL(File No.E52653)



1	PBT	GRAY UL94V-0	3	PHOSPHOR BRONZE	NICKEL PLATING $1 \mu m$ +TIN PLATING $1 \mu m$
			2	BRASS	CONTACT AREA : GOLD PLATING $0.2 \mu m$ LEAD AREA : TIN PLATING $2 \mu m$ UNDER PLATING : NICKEL $2.5 \mu m$
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA	20160428	DRAWING NO.	EDC-019597-72-00
		CHECKED : HT. YAMAGUCHI	20160428	PART NO.	PCN10H-16P-2.54DSA(72)
		DESIGNED : HR. NAGAYASU	20160427	CODE NO.	CL0583-0227-4-72
		DRAWN : HR. NAGAYASU	20160427	1/1	

A
B
C
D
E
F