

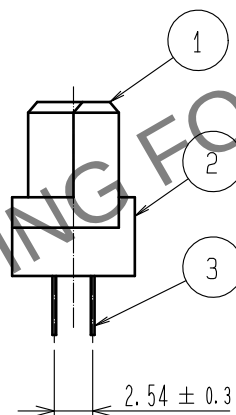
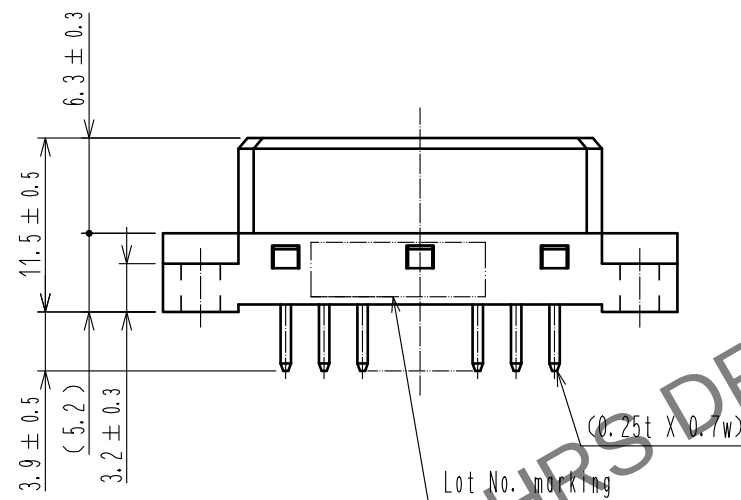



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

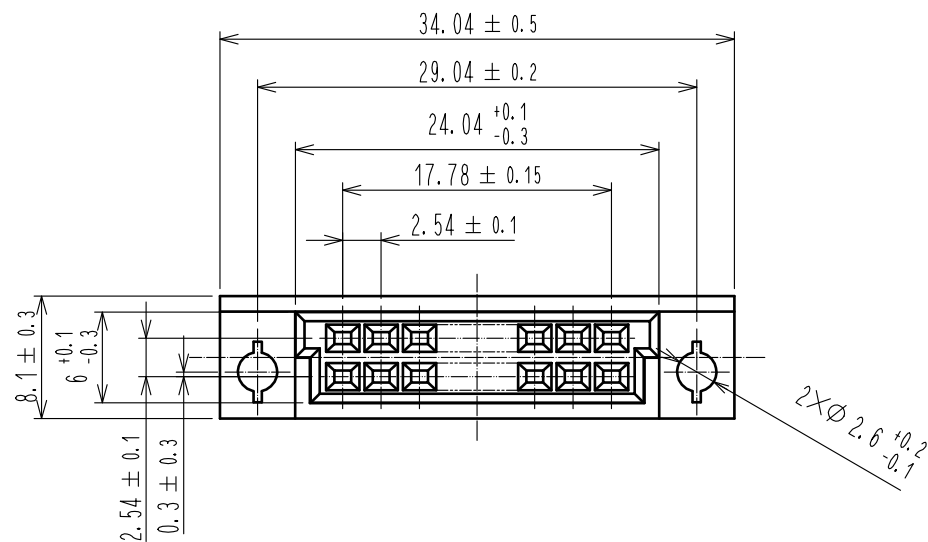


Recommended PC board hole pattern(t=1.6± 0.1)

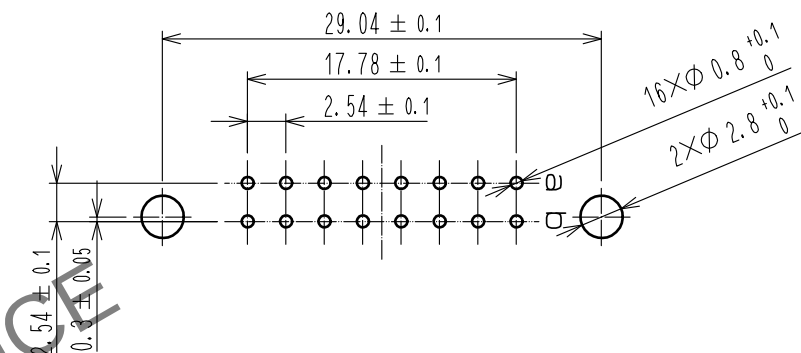

Note 1 UL(File No.E52653)

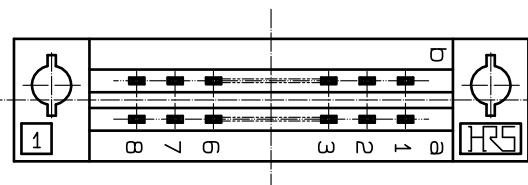

				3		COPPER ALLOY		CONTACT AREA : Ni1μm+Au0.1μm							
1, 2		PBT		BEIGE, UL94V-0				DIP AREA : Ni1μm+Sn1μm							
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS					
UNITS mm				SCALE 2 : 1		 COUNT 1		DESCRIPTION OF REVISIONS DIS-F-00017716		DESIGNED YU. NAKADA		CHECKED HT. YAMAGUCHI		DATE 20230329	
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				20140108		DRAWING NO.		EDC-019822-71-01			
				CHECKED : HT. YAMAGUCHI				20140108		PART NO.		PCN12-16S-2. 54DSA(71)			
				DESIGNED : KJ. NISHIWAKI				20140108		CODE NO.		CL0583-2056-4-71			
				DRAWN : KJ. NISHIWAKI				20140108							
						1									