


A
B
C
D
E
F

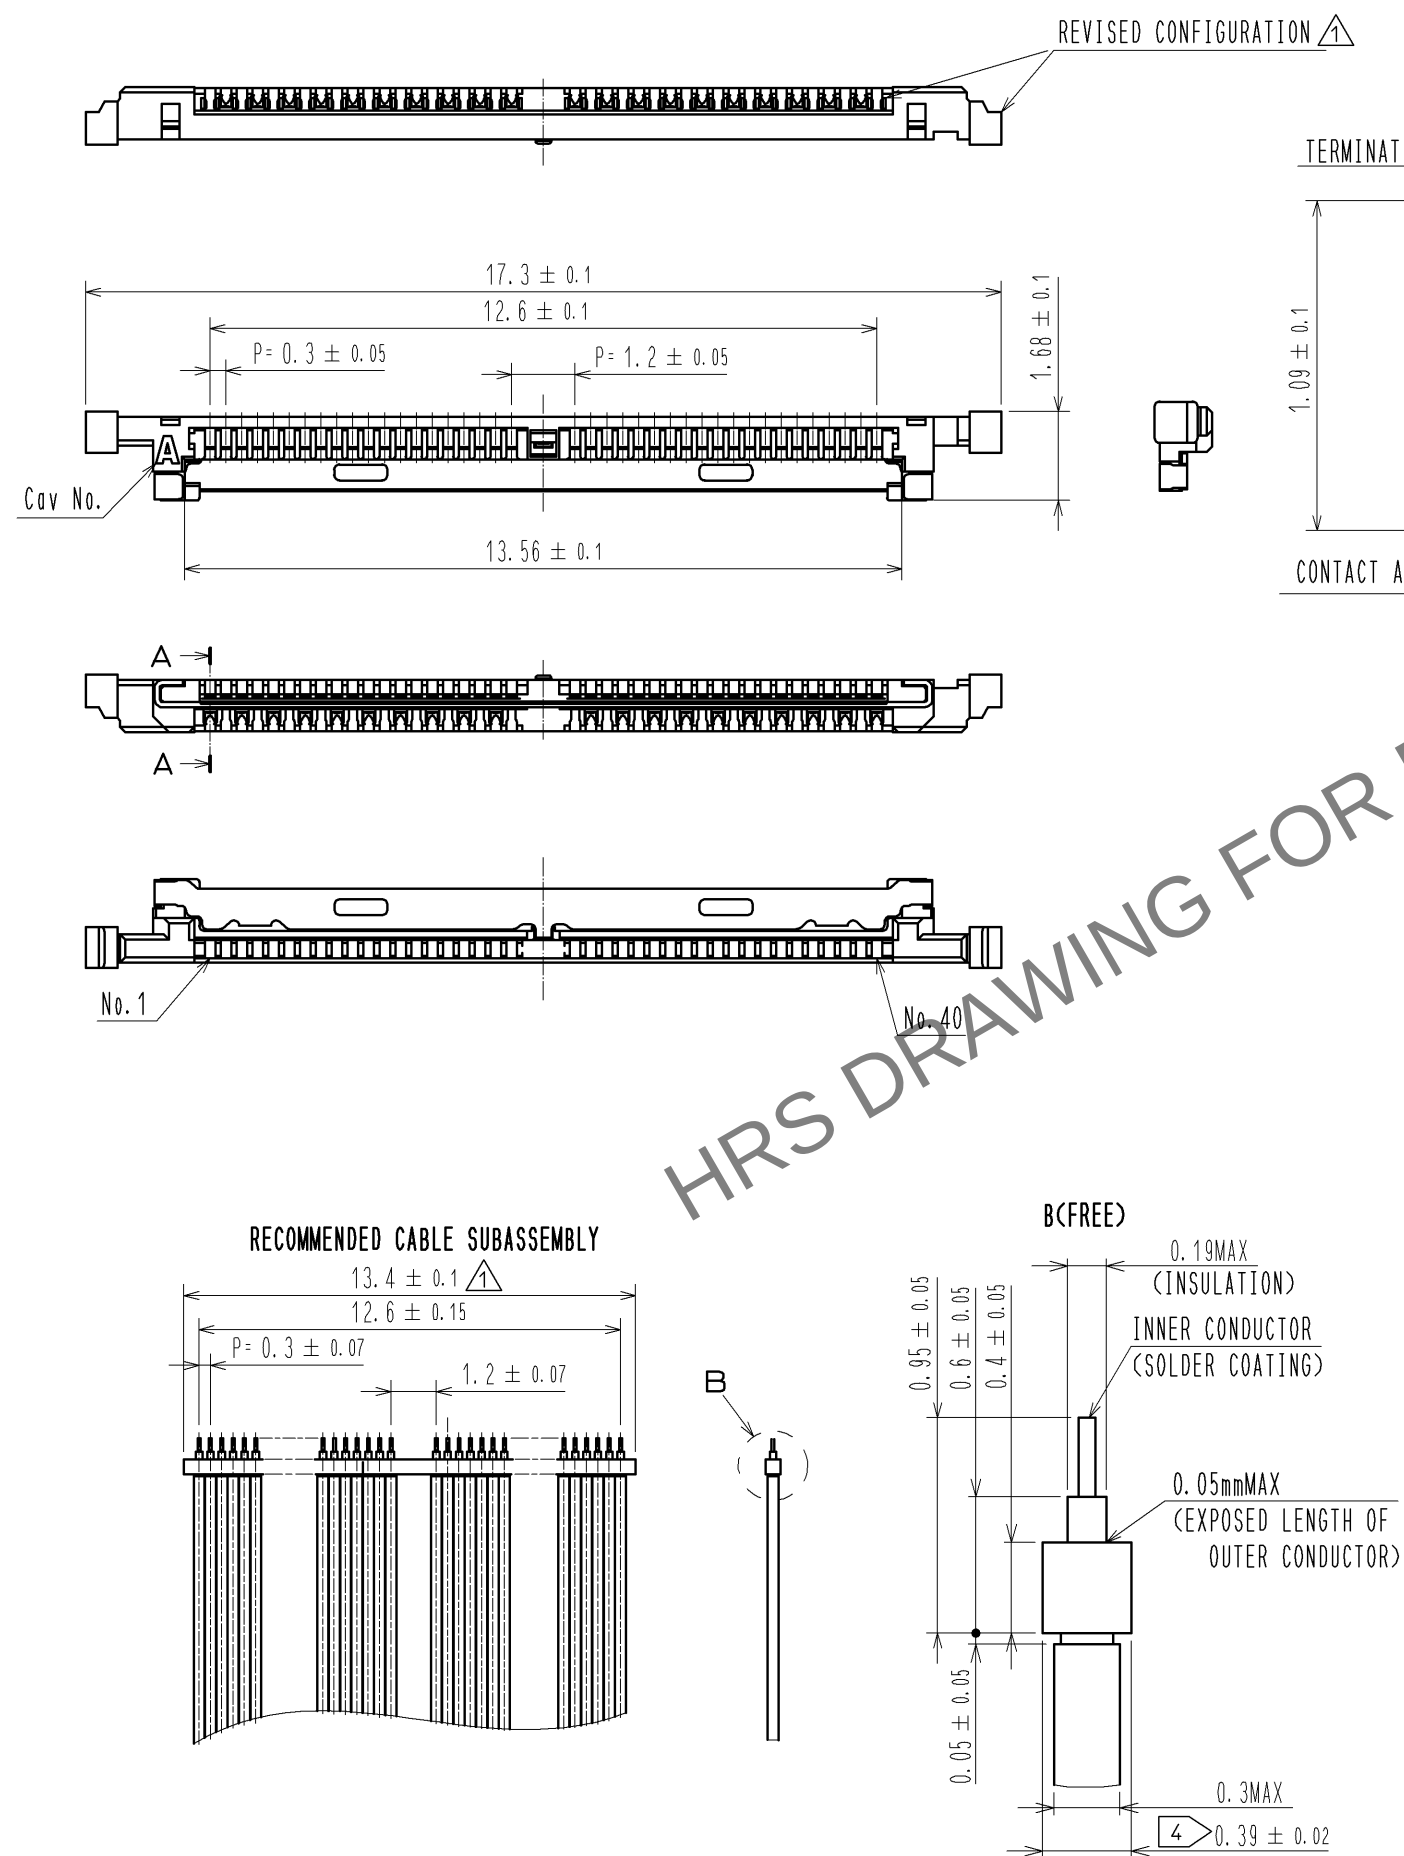


ITEM No.	PART NAME	PART No.	CODE No.
1, 2, 3	CONNECTOR UNIT	DF56-40P-0.3SD(51)	CL662-5601-3-51
—	METAL SHIELDING	DF56-40P-SHL	CL662-5602-6-00

NOTES

1. APPLICABLE CABLE: MICRO COAXIAL CABLE(AWG#42~AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS 'CONNECTOR UNIT, AND METAL SHIELDING'. REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No AND CODE No.
4. SOLDER A GRAND BAR WITH AN EXTERNAL CONDUCTOR OF THE CABLE ABOUT STICKING A GRAND BAR TOGETHER.
5. PLEASE CONSULT ABOUT THE USE OF THE POTTING AND KAPTON TAPE SEPARATELY.

2	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.1μm min	6	PS	BLACK
		TERMINATION AREA : Au PLATING 0.1μm min	5	POLYESTER	CLEAR
		UNDER PLATING : Ni PLATING 1 μm min	4	PS	CLEAR
1	LCP	UL94V-0 , BLACK	3	STAINLESS	WHOLE AREA : Sn PLATING 1μm min UNDER PLATING : Ni 0.2μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE FREE		COUNT 2	DESCRIPTION OF REVISIONS DIS-H-005089	DESIGNED AH.MIYAZAKI	CHECKED IO.DENPOUYA	DATE 10.09.15
 HIROSE ELECTRIC CO., LTD.					APPROVED : TS. SAKATA 10.07.29	DRAWING NO. EDC3-324301-01		
					CHECKED : IO.DENPOUYA 10.07.29			
					DESIGNED : AH.MIYAZAKI 10.07.29	CODE NO. CL662-5601-3-51		
					DRAWN : AH.MIYAZAKI 10.07.29		 1/2	

