
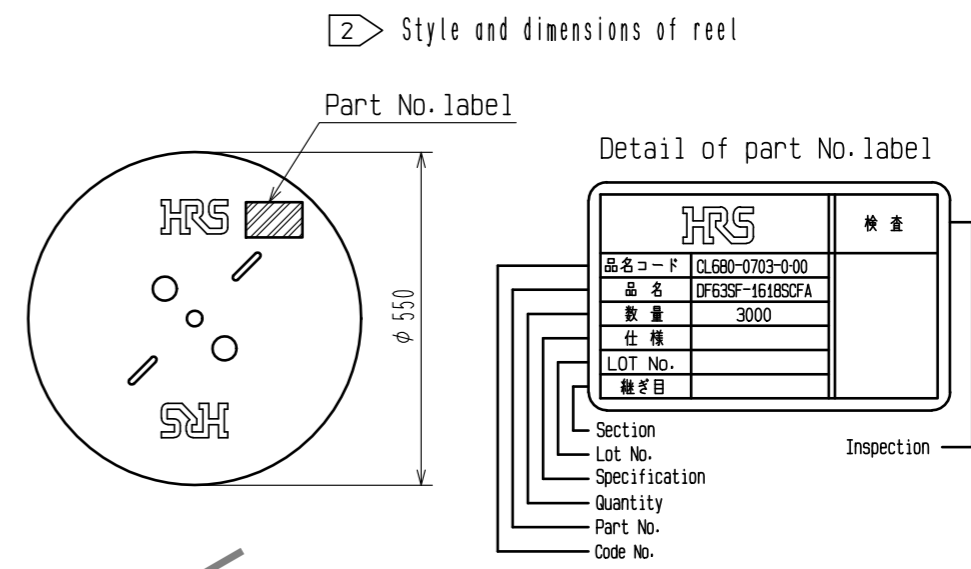


Aug.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

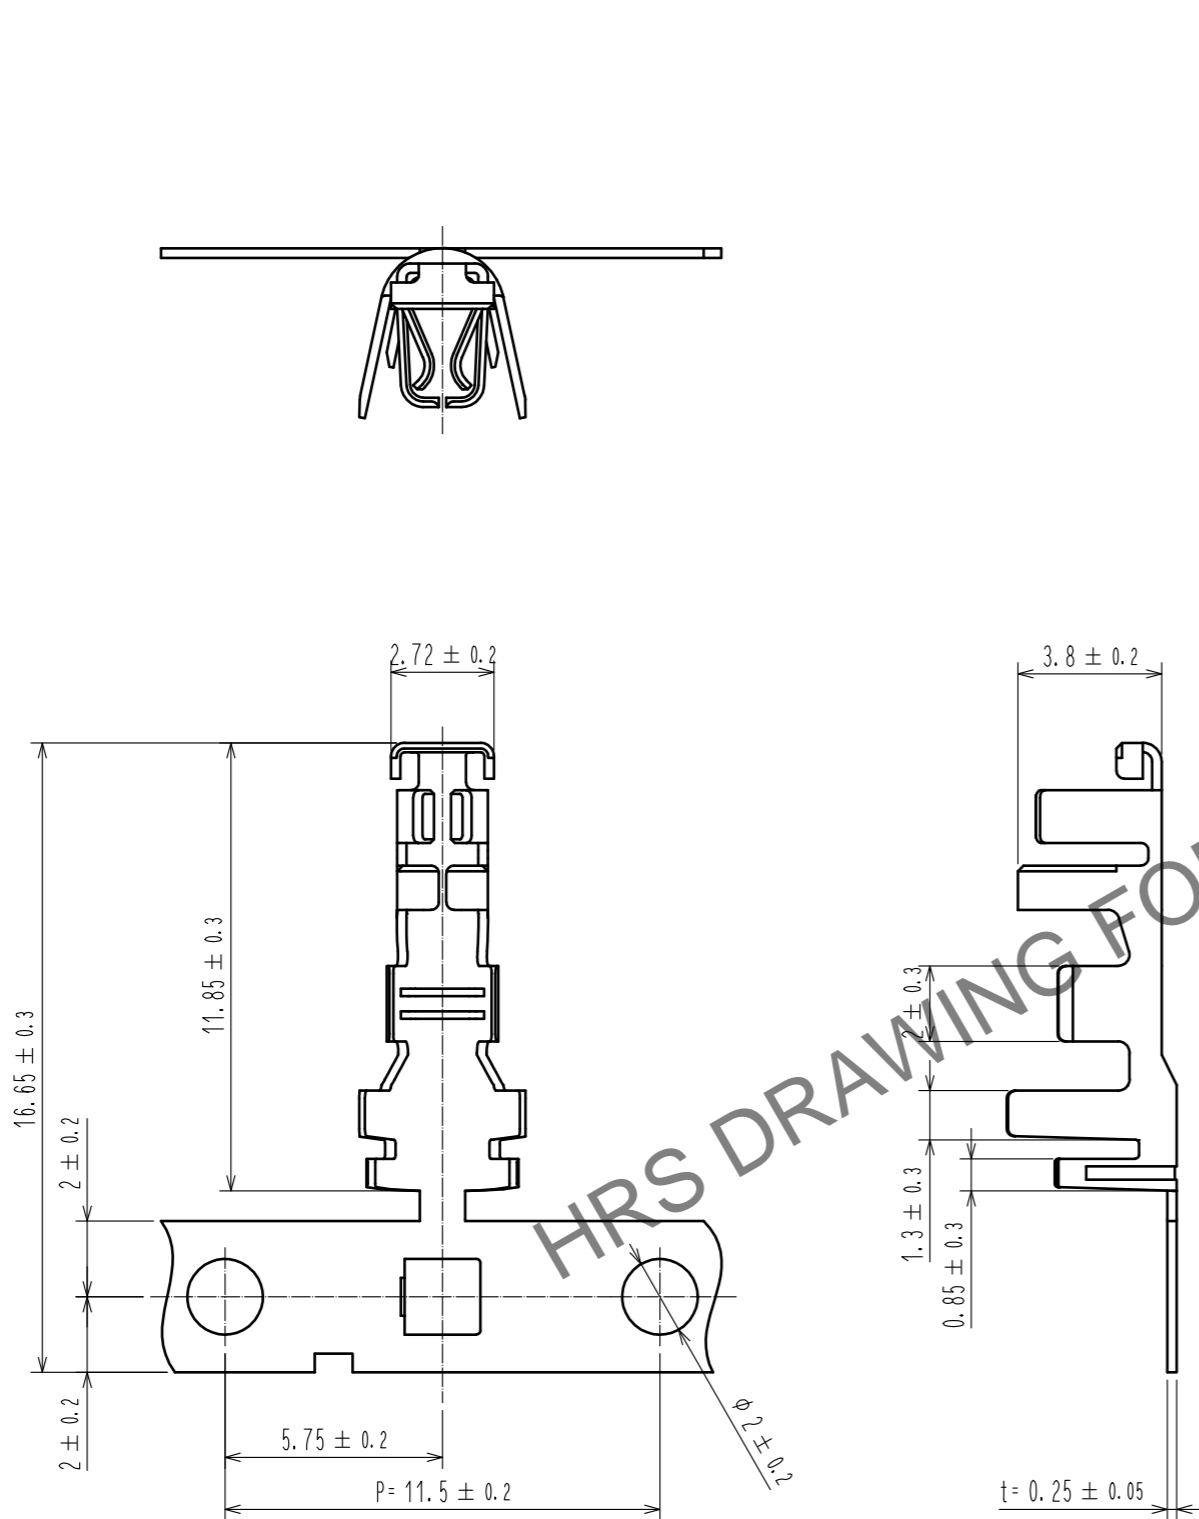

HRS DRAWING FOR REFERENCE

Note. 1. 3,000 contacts per reel. \triangle
 2. Style of reel are shown in figure.
 3. Please be to check the form of crimping using a cable, when you adjust applicator. .

		1	Copper alloy	Contact area : Gold plating 0.2 μ m MIN Under plating : Nickel plating 1.27 μ m MIN
NO.	MATERIAL	FINISH . REMARKS		
UNITS mm	\odot \triangle	SCALE 5 : 1	COUNT \triangle 1	DESCRIPTION OF REVISIONS DIS-H-00002553
DESIGNED : SANGMUK. LIM		DESIGNED : HS. OKAWA	16.11.25	DESIGNED : SANGMUK. LIM
CHECKED : YN. TAKASHITA		CHECKED : YN. TAKASHITA	16.11.25	CHECKED : YN. TAKASHITA
DRAWN : SANGMUK. LIM		DRAWN : SANGMUK. LIM	16.11.25	DRAWN : SANGMUK. LIM
DRAWING NO. EDC-367036-00-00		PART NO. DF63SF-1618SCFA		
CODE NO. CL680-0703-0-00		DATE 17.01.31		