



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

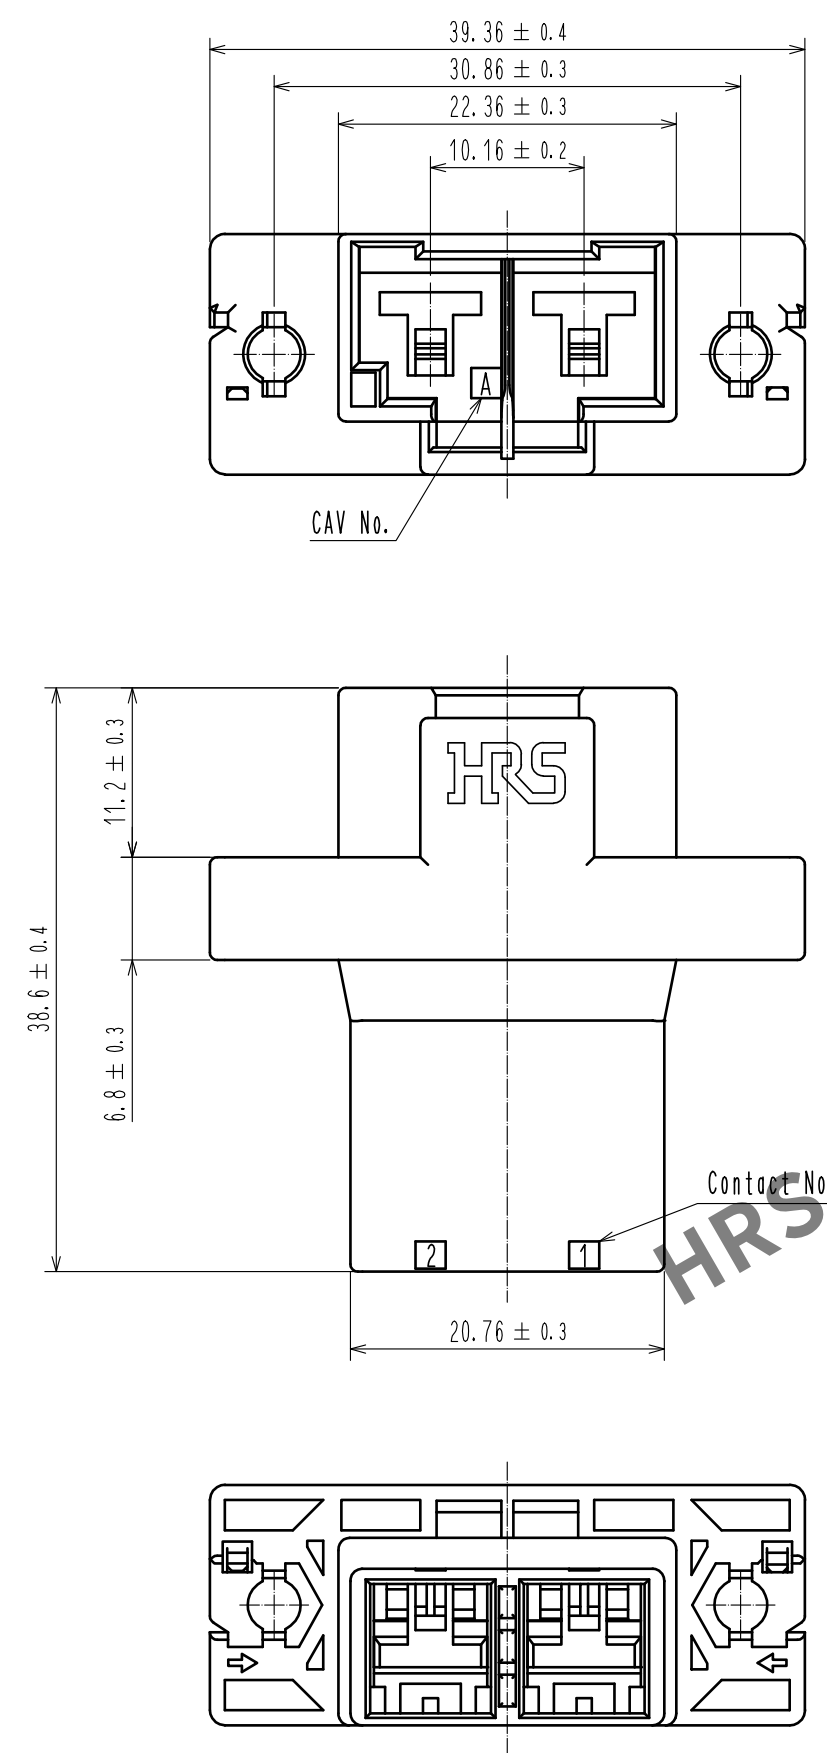

DF60-2EP-10.16C(15)


DF60-2S-10.16C(##)

NOTE 1. Per pack : 100 pieces.


					1	PBT		Red. UL94V-0										
NO.		MATERIAL		FINISH , REMARKS			NO.		MATERIAL		FINISH , REMARKS							
UNITS mm				SCALE 2 : 1				COUNT		DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA				15. 01. 19		DRAWING NO.		EDC-344821-15-00						
				CHECKED : TS. FUKUSHIMA				15. 01. 17		PART NO.		DF60-2EP-10. 16C(15)						
				DESIGNED : TS. KUMAZAWA				15. 01. 17		CODE NO.		CL680-3025-5-15						
				DRAWN : TS. KUMAZAWA				15. 01. 17										
5				6				7				8				 1/2		

DF60 In-Line type recommended panel mounting Manual (When nuts uses)


Nut installation process

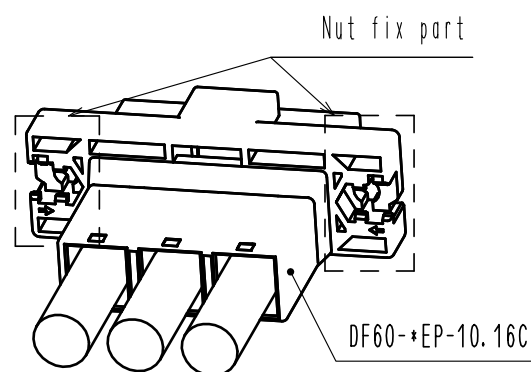

1. Slide a nut (Size:M3) to nut fix part.

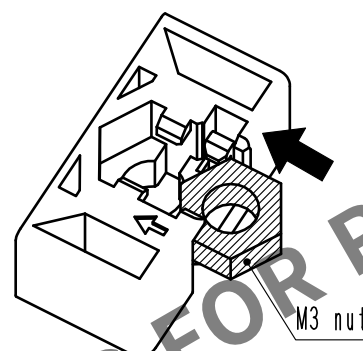


2. Press down the nut until it clicks.
Then this sound means the nut has inserted into nut holder.

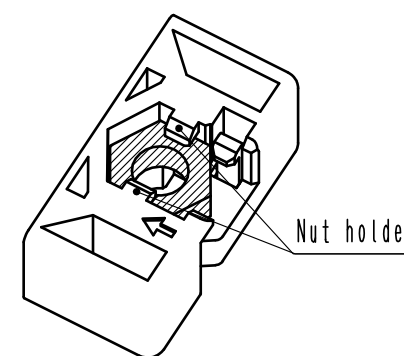


Panel mounting process

1. Insert connector into panel cut out part.

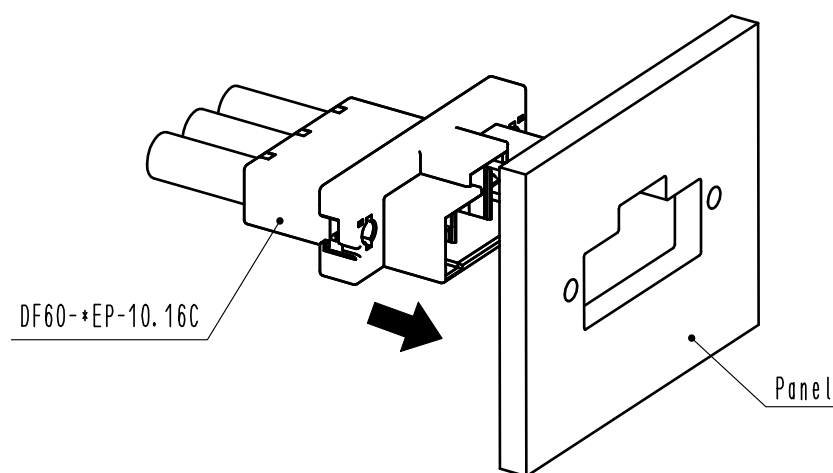

2. Tighten a screw (Size:M3) to fix with panel.
Recommended torque : Less than 49N · cm

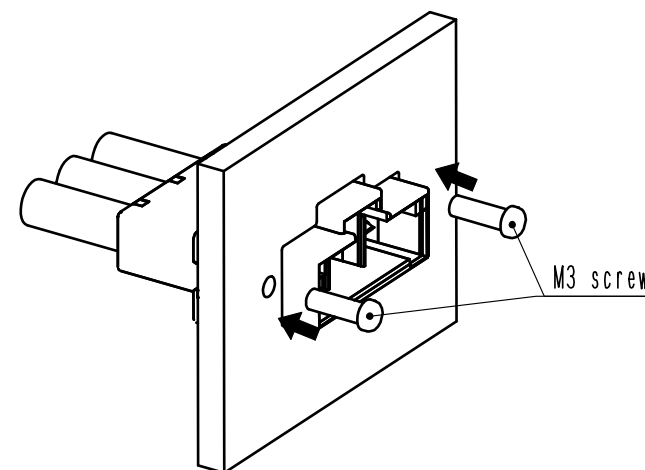

HRS

DRAWING NO.	EDC-344821-15-00
PART NO.	DF60-2EP-10.16C(15)
CODE NO.	CL680-3025-5-15