





May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

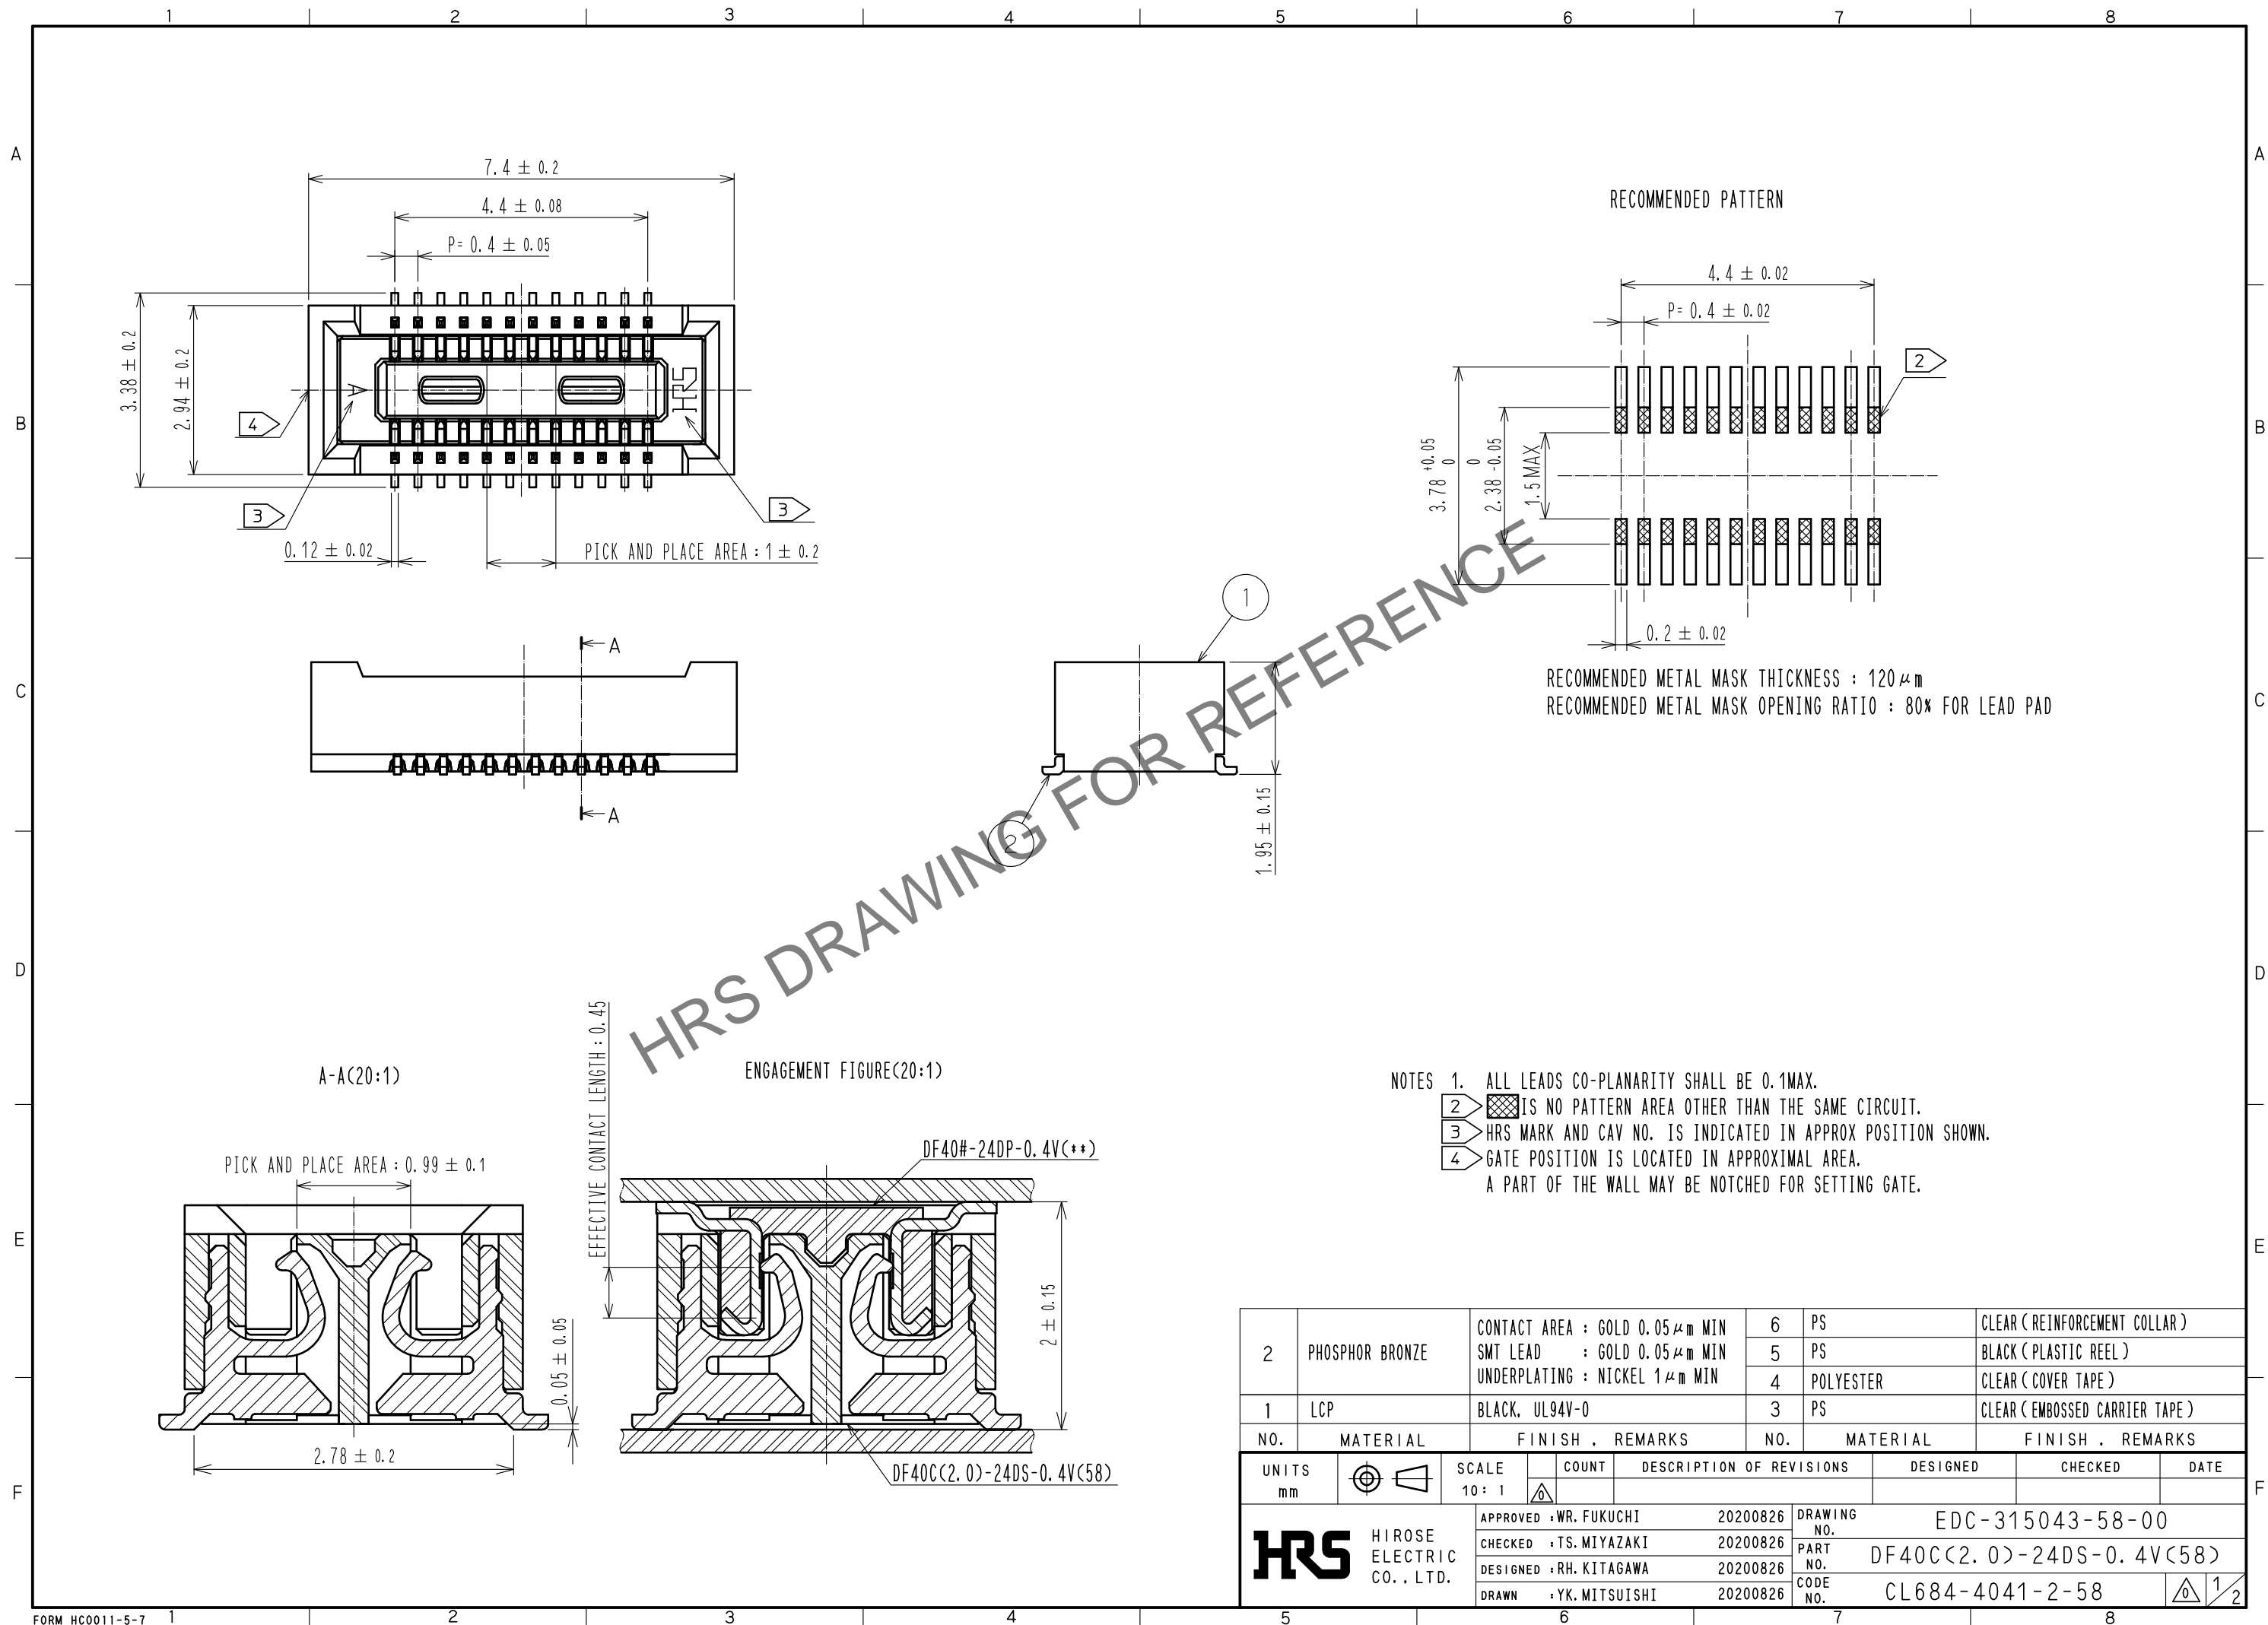

EMBOSSSED CARRIER TAPE DIMENSIONS (5:1)

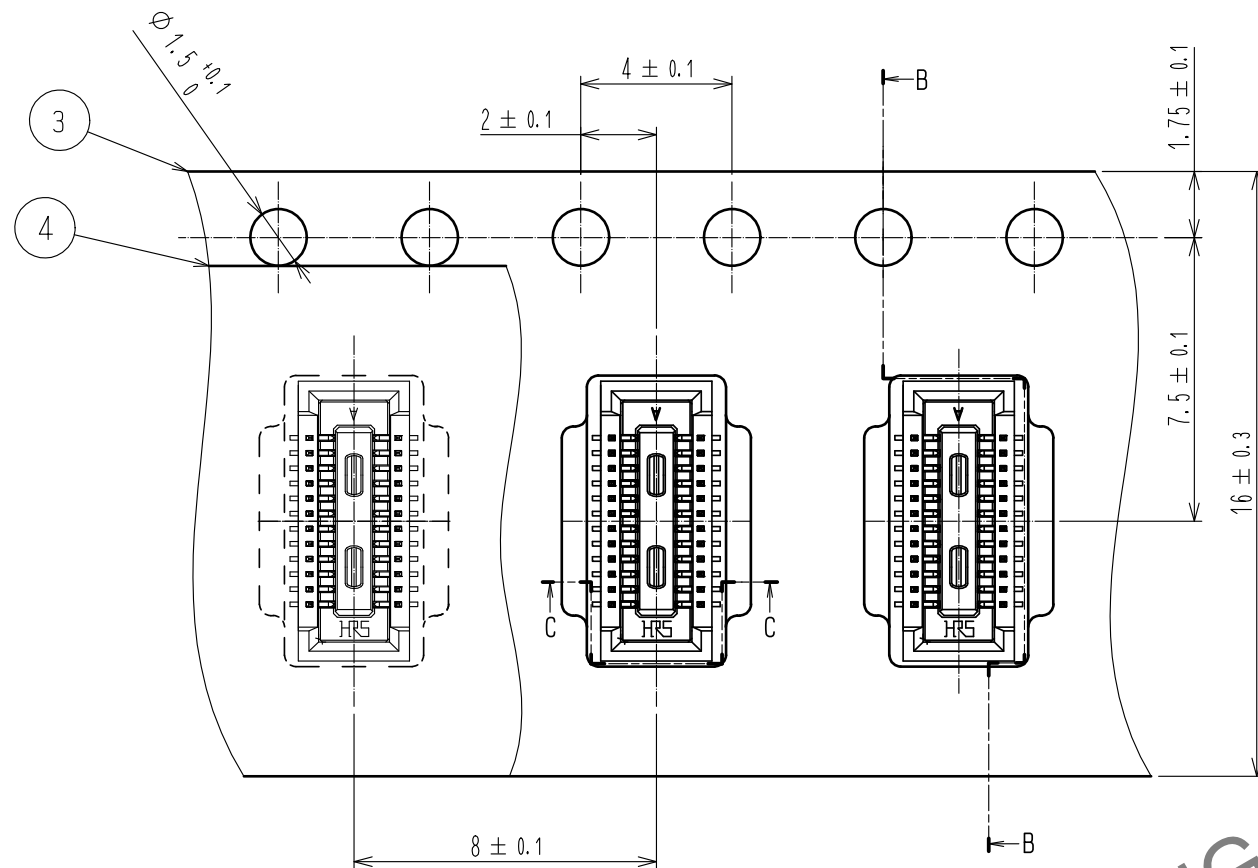

DIRECTION OF UNREELING

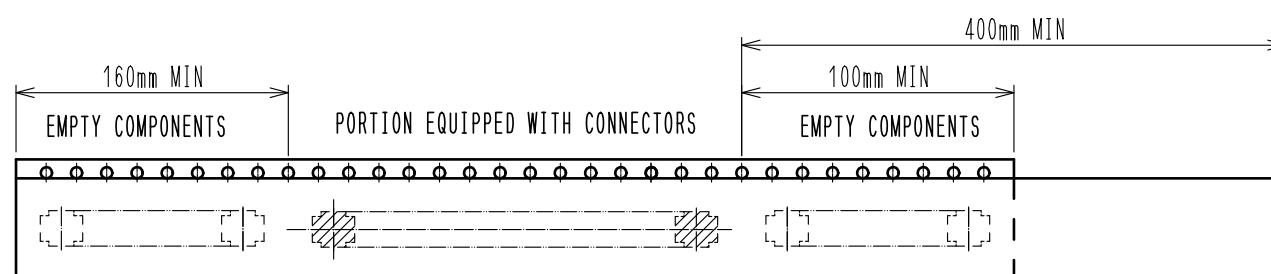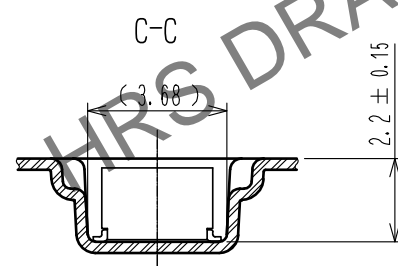


TRAILER

7 TAPING(FREE)

LEADER

STYLE AND DIMENSION OF REEL (FREE SIZE)

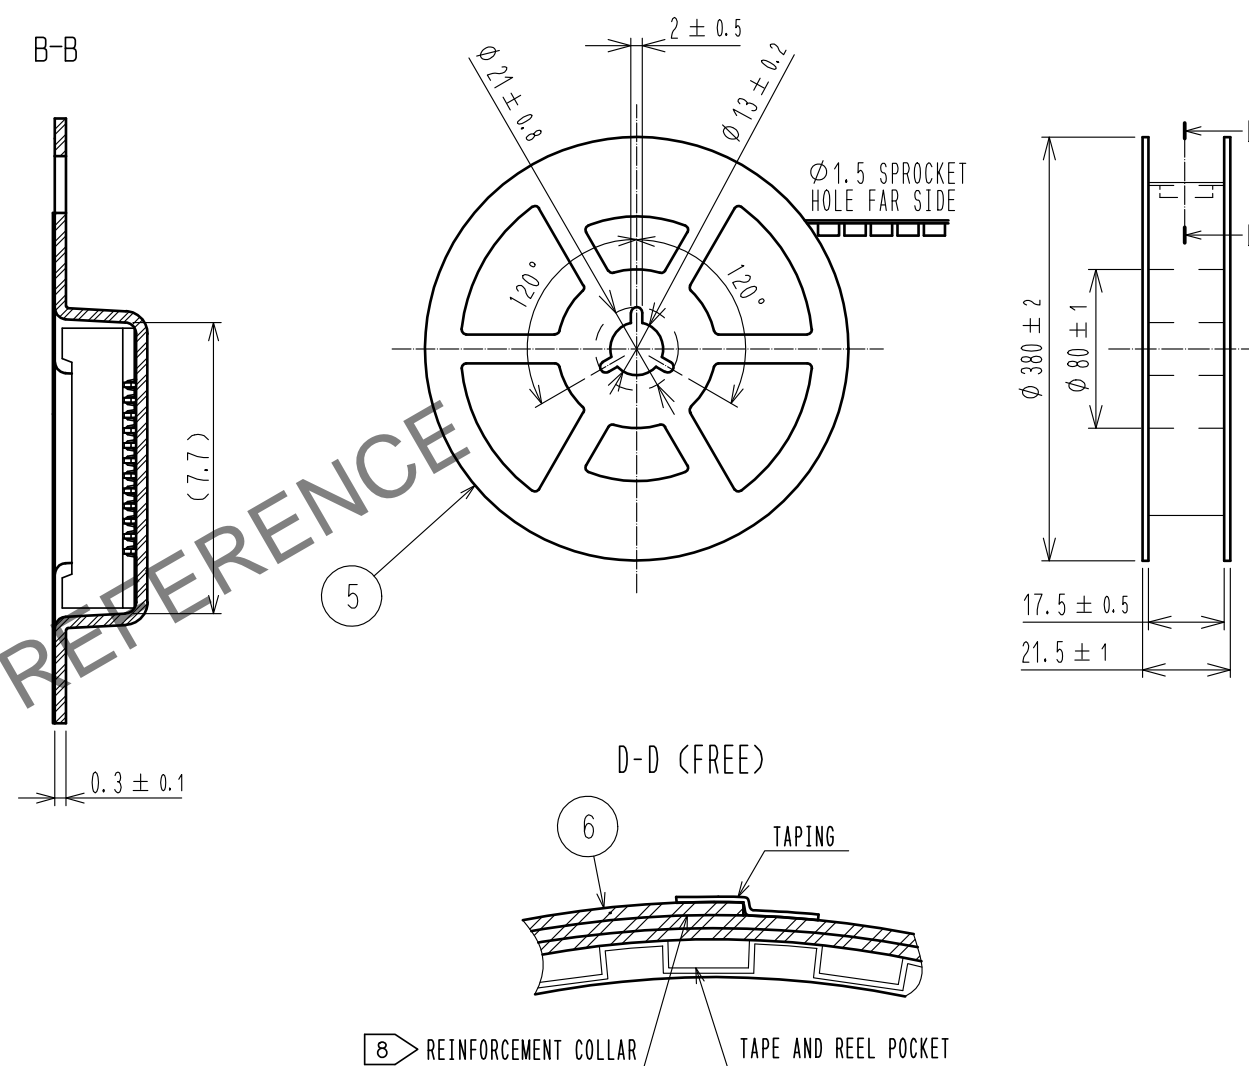

- NOTES 5. PER REEL 1000 CONNECTORS.
6. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
7. REFER TO JIS C 0806, IEC 60286-3. (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)
8. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END OF THE COLLAR.