


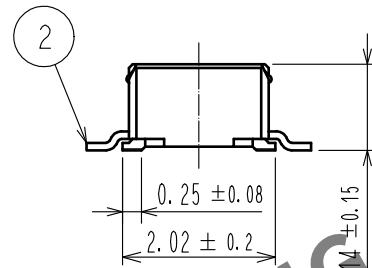
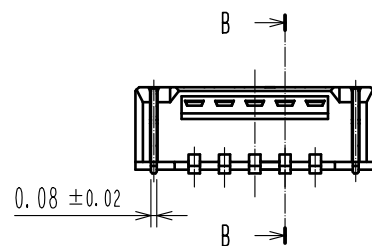
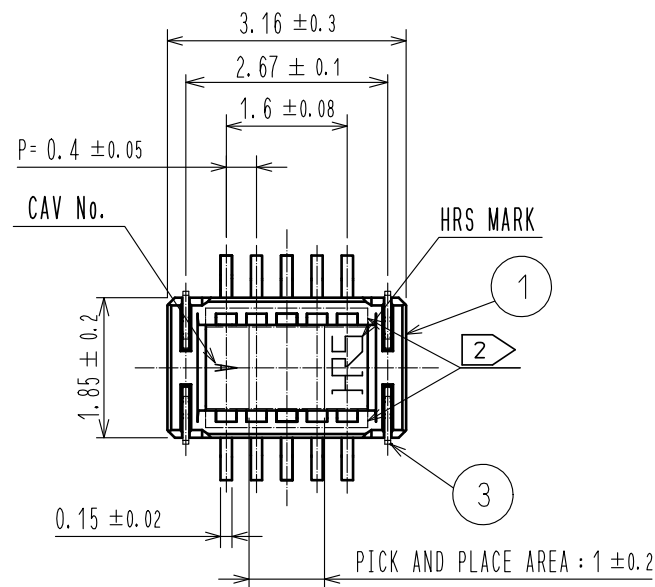


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

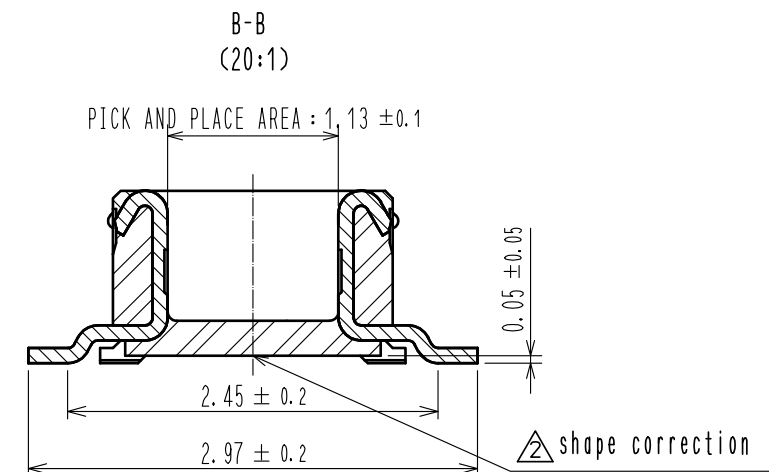

NOTES) 1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
2. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA, BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

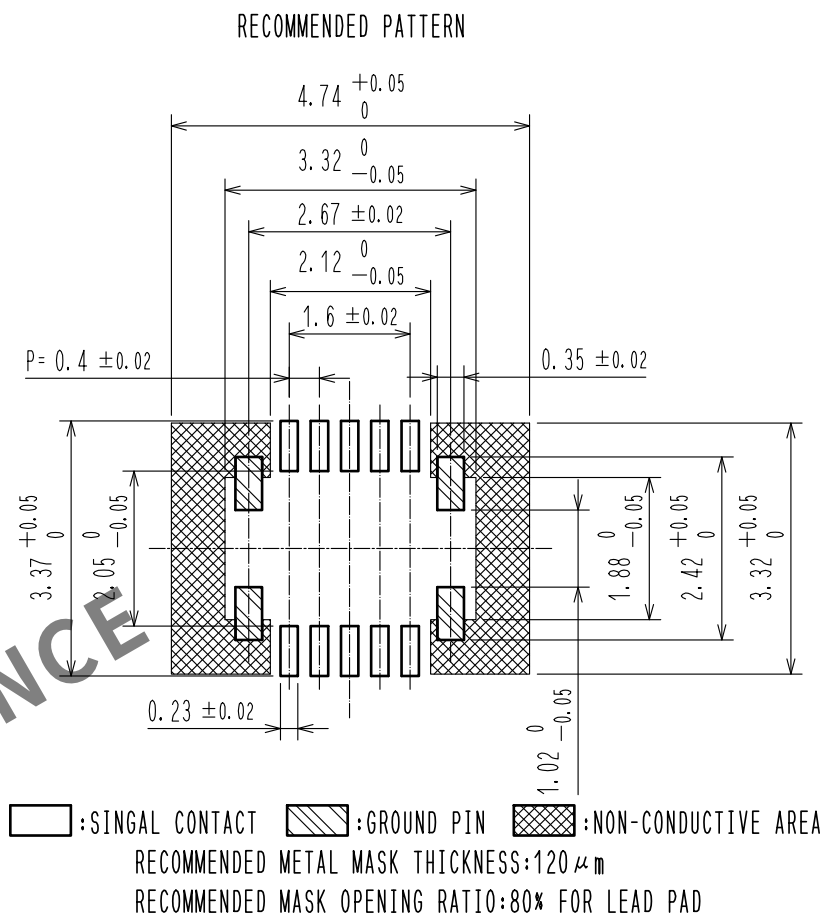

			7	PS	CLEAR, REINFORCEMENT COLLAR
			6	PS	BLACK, PLASTIC REEL
			5	POLYESTER	CLEAR, COVER TAPE
2	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN	4	PS	CLEAR, EMBOSSED CARRIER TAPE
		SMT LEAD: Au 0.05 μm MIN	3	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN
		UNDERPLATING: NICKEL 1 μm MIN			SMT LEAD: Au 0.05 μm MIN
1	LCP	BLACK, UL94V-0			UNDERPLATING: NICKEL 1 μm MIN
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00006416	DESIGNED PAN YIWEI	CHECKED TS. MIYAZAKI	DATE 20201007
 HIROSE ELECTRIC CO., LTD.		APPROVED : WR. FUKUCHI	20181226	DRAWING NO. EDC-386449-51-00				
		CHECED : TS. MIYAZAKI	20181226	PART NO. DF40GT-10DP-0. 4V (51)				
		DESIGNED : SJ. WADA	20181225	CODE NO. CL684-4260-0-51				
		DRAWN : RH. KAGAMI	20181225					

