

Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

NOTES 1 CONTACT PORTION : GOLD PLATING $0.77\mu\text{m}$ min.
DIP PORTION : GOLD FLASH.
UNDER PLATING : NICKEL PLATING $1.27\mu\text{m}$ min.



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A - A


RECOMMENDED BOARD

CONNECTOR INTERFACE

(BOARD THICK=1.6)

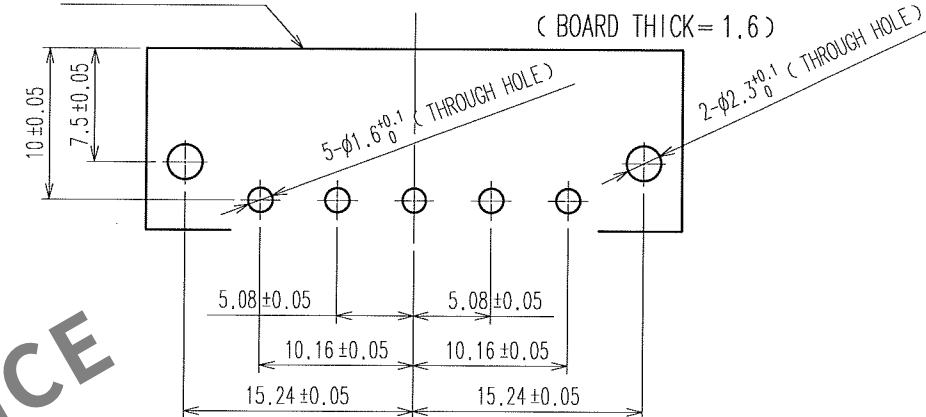

RECOMMENDED PANEL

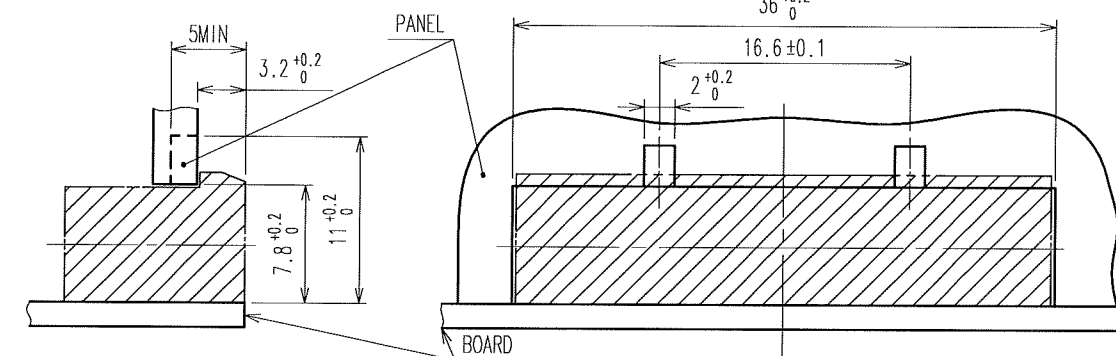

2	BRASS	1	4	PHOSPHOR BRONZE	TIN PLATING		
1	PBT	BLACK	UL94V-0	3	STEEL	NICKEL PLATING	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			m. shii 06.08.24	D. Matsune 06.08.24	E. Kunita 06.08.25	M. Sato 06.08.25	. .
		DRAWING NO.		PART NO.			
SCALE 2 : 1		EDC3-112082-72		HR31-5.08R-5PDL (72)			
UNITS mm		HRS HIROSE ELECTRIC CO., LTD		CODE NO.			1/1
				CL131-0001-0-72			