


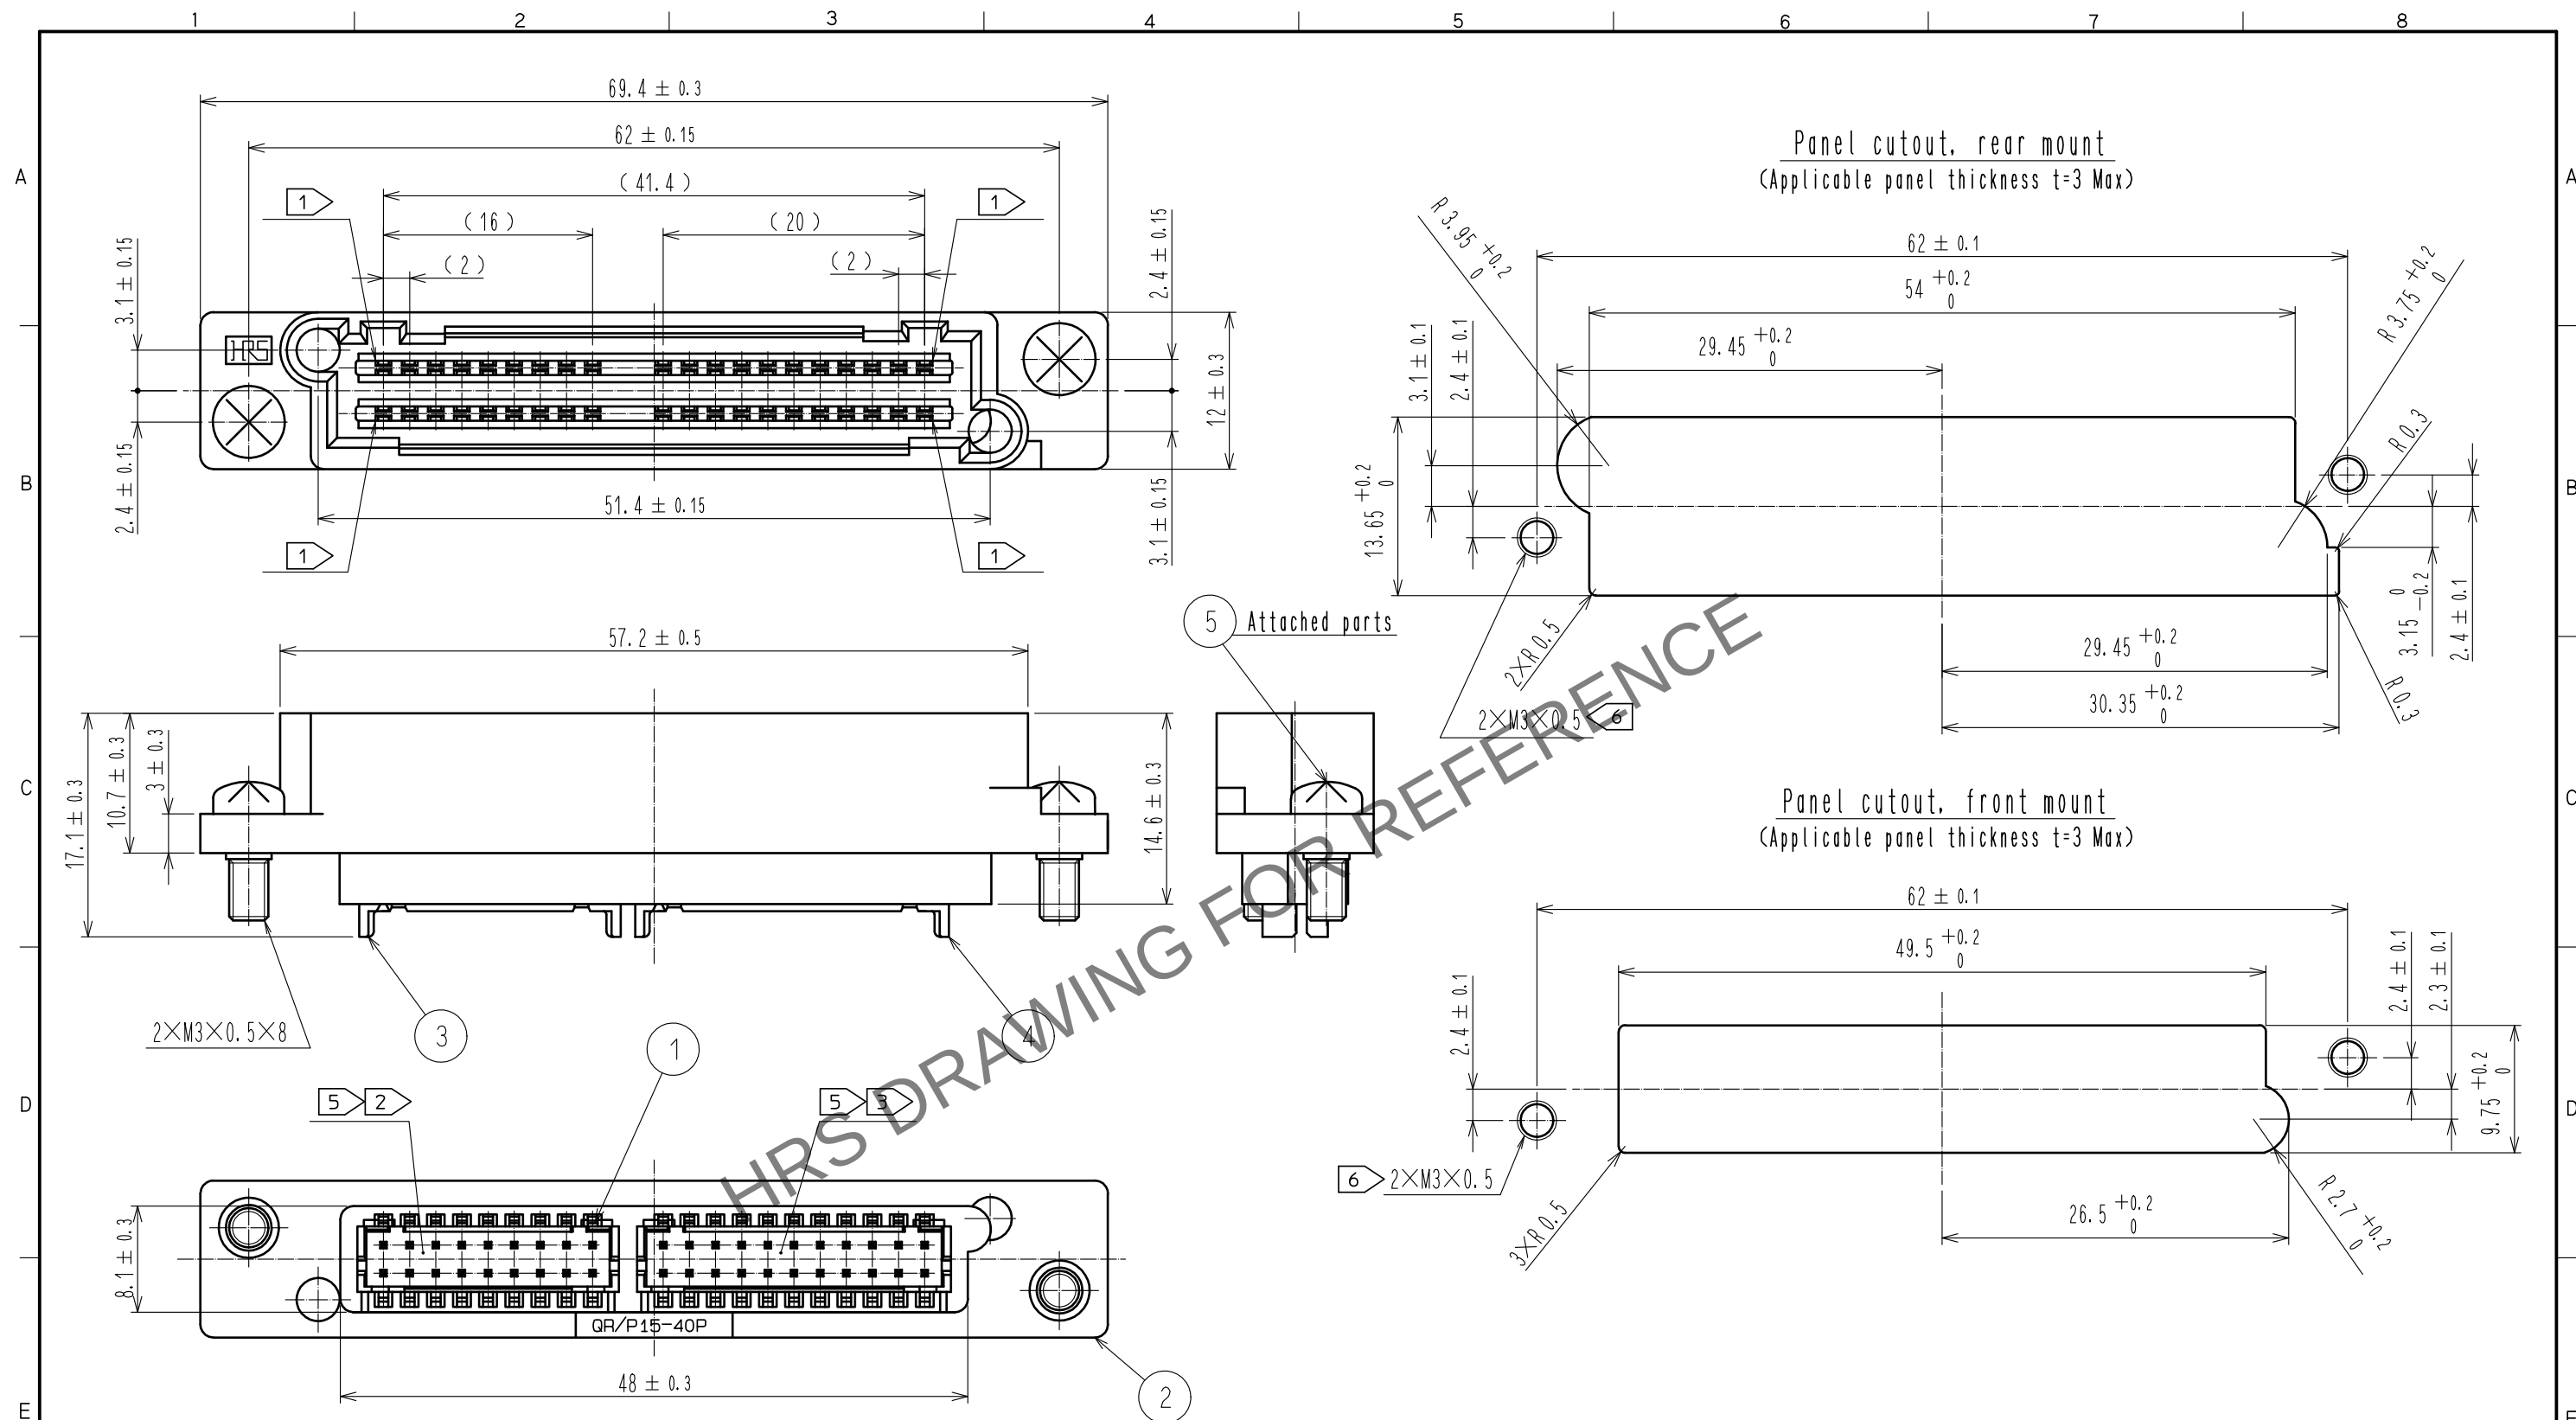

Notes 1 The contacts at the 4 ends will be in contact first when mated with QR/P15-40S. (Sequence structure)

2 The following connectors can be mated at this portion.

Product name	CL code	Number of contacts	Contact No. to be connected to the sequence part
DF11-18DS-2C	CL0543-0508-4-00	18	1, 2

3 The following connectors can be mated at this portion.

Product name	CL code	Number of contacts	Contact No. to be connected to the sequence part
DF-11-22DS-2C	CL0543-0510-6-00	22	21, 22

4. Use the gold plated socket crimp contact.

5 Refer to ATAD-E2829 for connector wiring when mated.

6 Effective screw area shall be 1.5mm min.

2	PBT	Black . UL94V-0	5	Steel	Over : Nickel plating 0.8μm min. Under : Copper plating 2μm min.			
1	Phosphor bronze	Contact area : Gold plating 0.2μm min. Terminal area : Gold plating 0.2μm min. Under : Nickel plating 0.8μm min.	4	Polyamide	Black . UL94V-0			
			3	Polyamide	Black . UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED	RI. TAKAYASU	18. 06. 12	DRAWING NO.	EDC-120809-50-04			
	CHECKED	RI. TAKAYASU	18. 06. 12	PART NO.	QR/P15-40P(C50)			
	DESIGNED	AH. KODAMA	18. 06. 11	CODE NO.	CL221-0252-0-50			
	DRAWN	SJ. SATO	18. 06. 11		 			