






May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO

Q1

USA

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	DIS-E-000197	Y.S	Y.E	05.08.29					

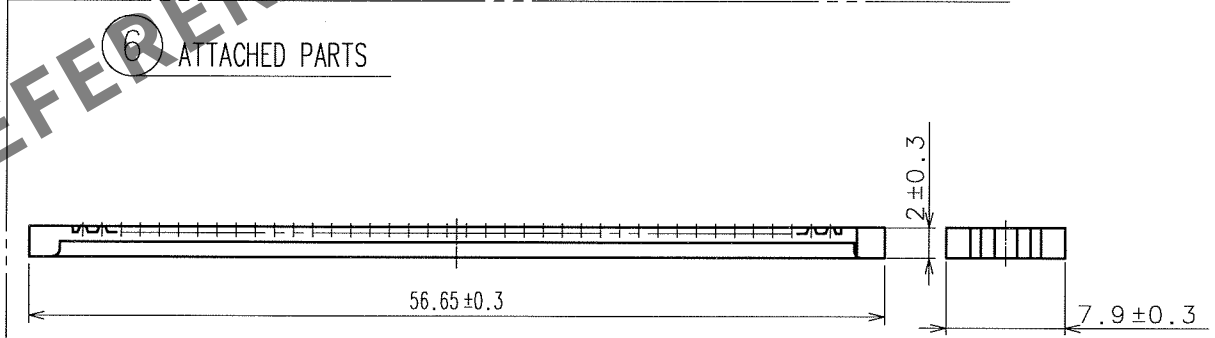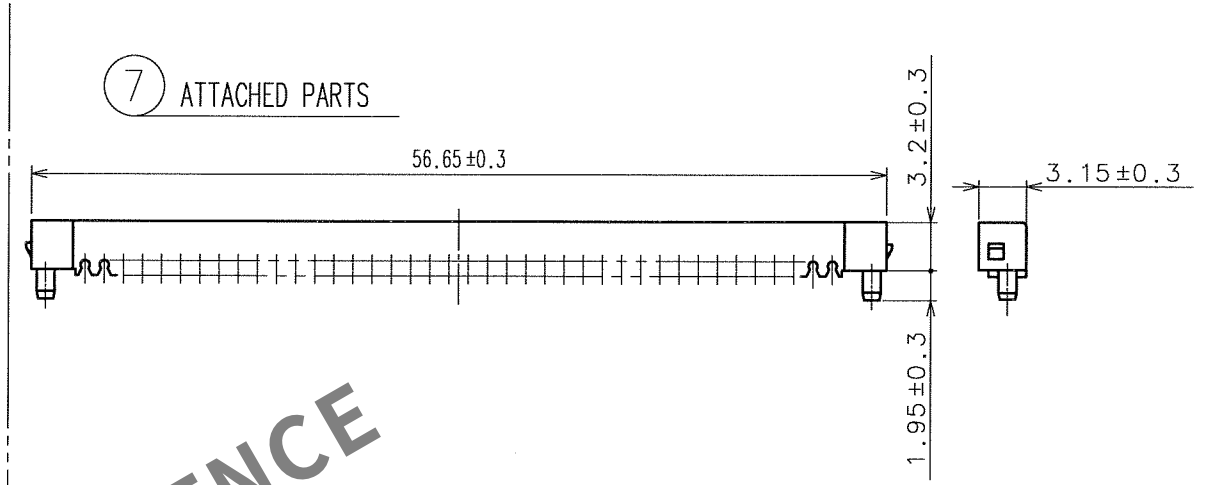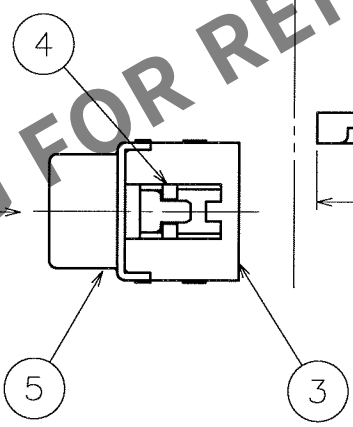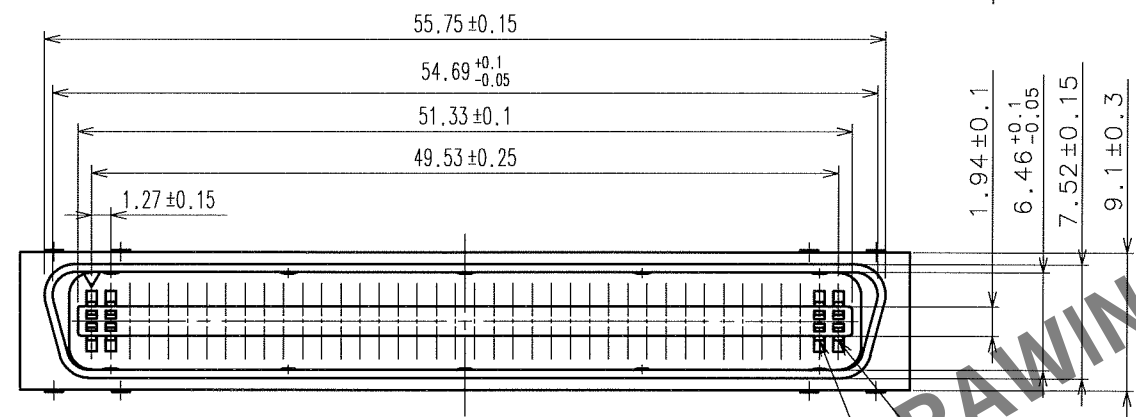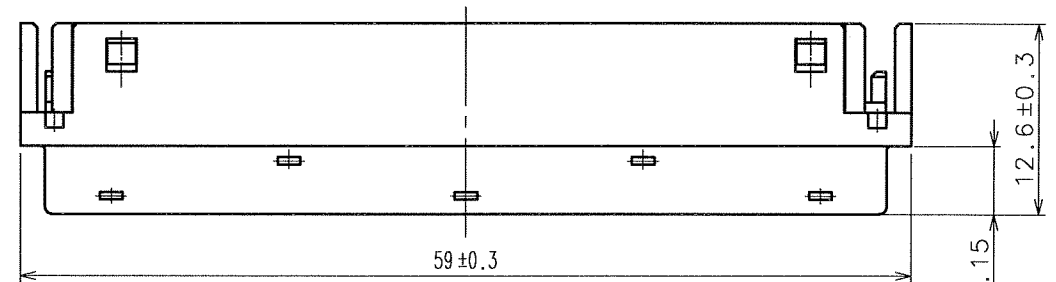

NOTE 1. FIXING FORCE OF REF.NO ③ TO BE 100N MIN TO DIRECTION A.

4	PBT	UL94V-0(BLACK)			
3	PBT	UL94V-0(BLACK)	7	PBT	UL94V-0(BLACK)
2	BERYLIUM COPPER	CONTACT AREA: GOLD PLATING IDC AREA: GOLD FLASH PLATING	6	PBT	UL94V-0(BLACK)
1	BERYLIUM COPPER	CONTACT AREA: GOLD PLATING IDC AREA: GOLD FLASH PLATING	5	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			K. IWABUCHI	K. IWABUCHI	T. ASO
			98.05.23	98.05.23	98.05.23
			APPROVED		
			H. TANAKA		
			RELEASED		
DRAWING NO. EDC3-040390			PART NO. DX30AM-80P		
SCALE 2 : 1			CODE NO. CL230-5030-7		
UNITS mm			1/1		

HIROSE ELECTRIC CO., LTD