

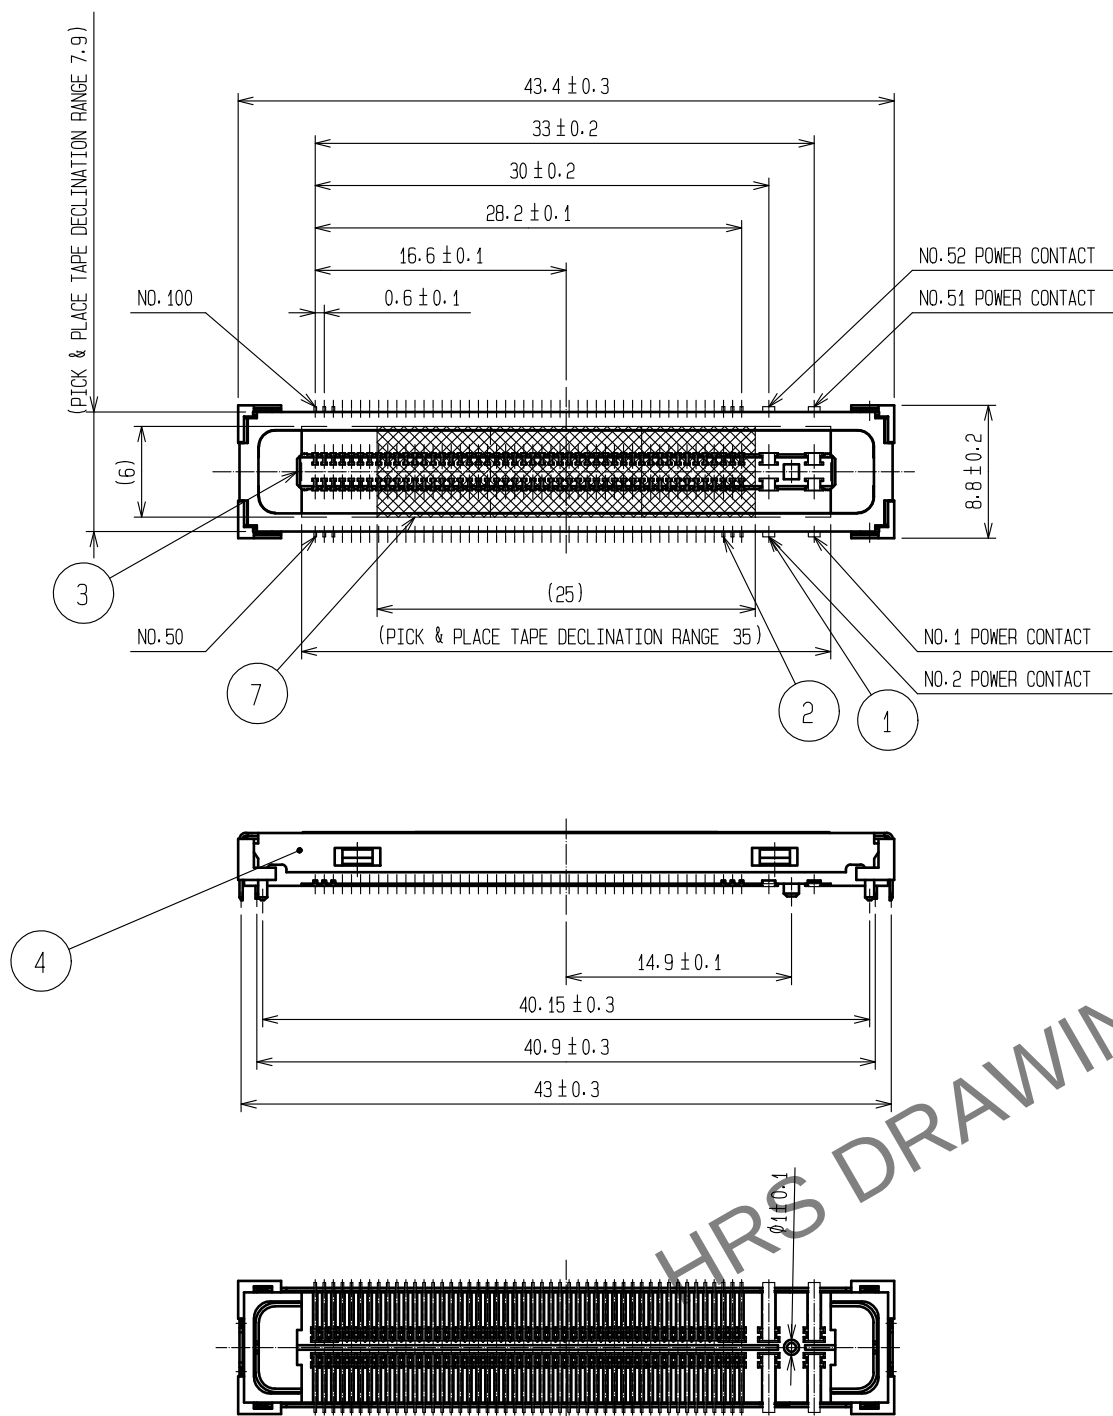


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

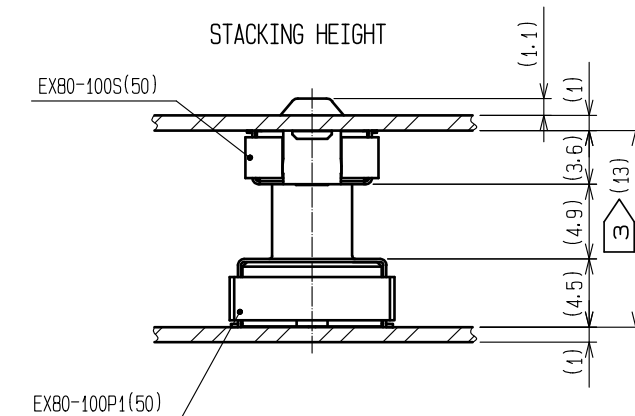

RECOMMENDED PC BOARD PATTERN(AUTOMATIC MOUNTING)

(COMPONENT MOUNTING SIDE:PCB t=1 MIN)

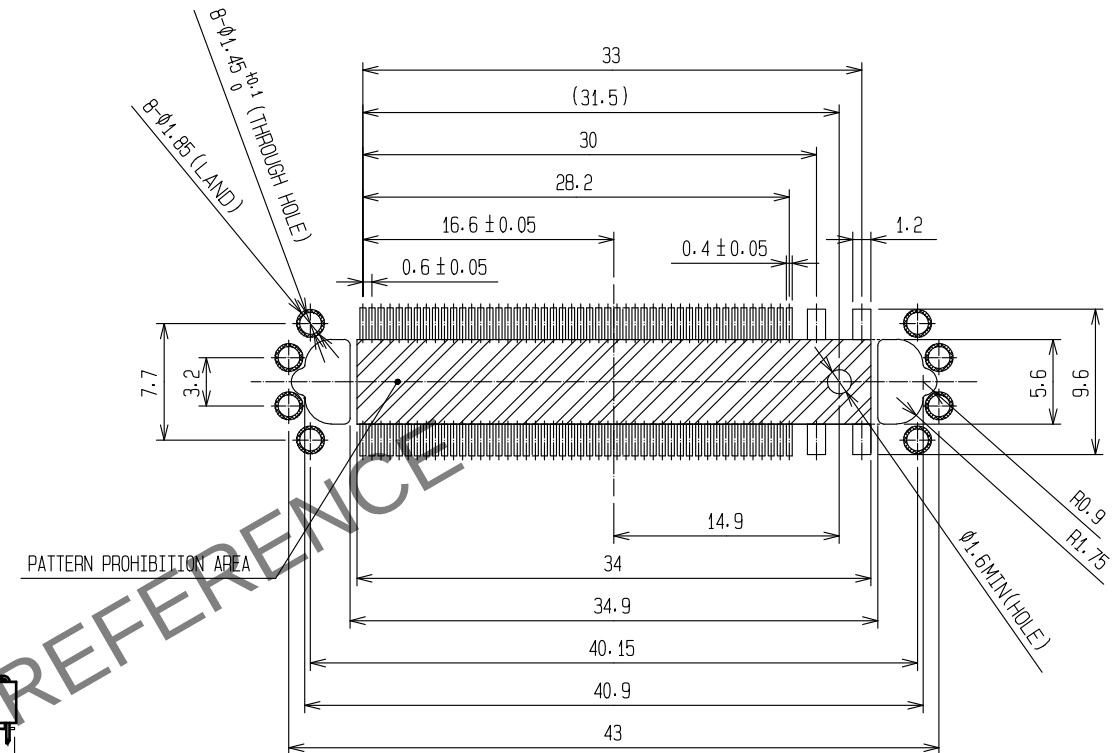


- NOTE 1 CONTACT CO-PLANARITY TO BE MAX 0.15.
2 TOLERANCES TO BE ±0.1 UNLESS OTHERWISE SPECIFIED.
3 DEVICE DESIGN SHALL CONSIDER THE STACKED HEIGHT TO BE 14.5mm MAX.
(RECOMMENDED STACKED HEIGHT IS 13.7mm MAX.)
4 CONTACT AREA :GOLD PLATING 0.2µm min
LEAD AREA :TIN COPPER PLATING 1µm min
THE OTHERS AREA:NICKEL PLATING 2µm min
5 DIP AREA :TIN COPPER 2µm min
THE OTHERS AREA:NICKEL PLATING 0.6µm min

3	LCP	UL94V-0, BLACK	7	PICK & PLACE TAPE	
2	PHOSPHOR BRONZE	4	6	PS	MILKY-WHITE
1	COPPER ALLOY	4	5	PS	MILKY-WHITE
			4	STAINLESS STEEL	5
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-122485-30-00
		CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	EX80-100S(30)
		DESIGNED : TS. ITO	15.10.27	CODE NO.	CL232-0592-2-30
		DRAWN : AK. AKIYAMA	15.10.27		1/2

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EX80-100S PACKAGING FIGURE

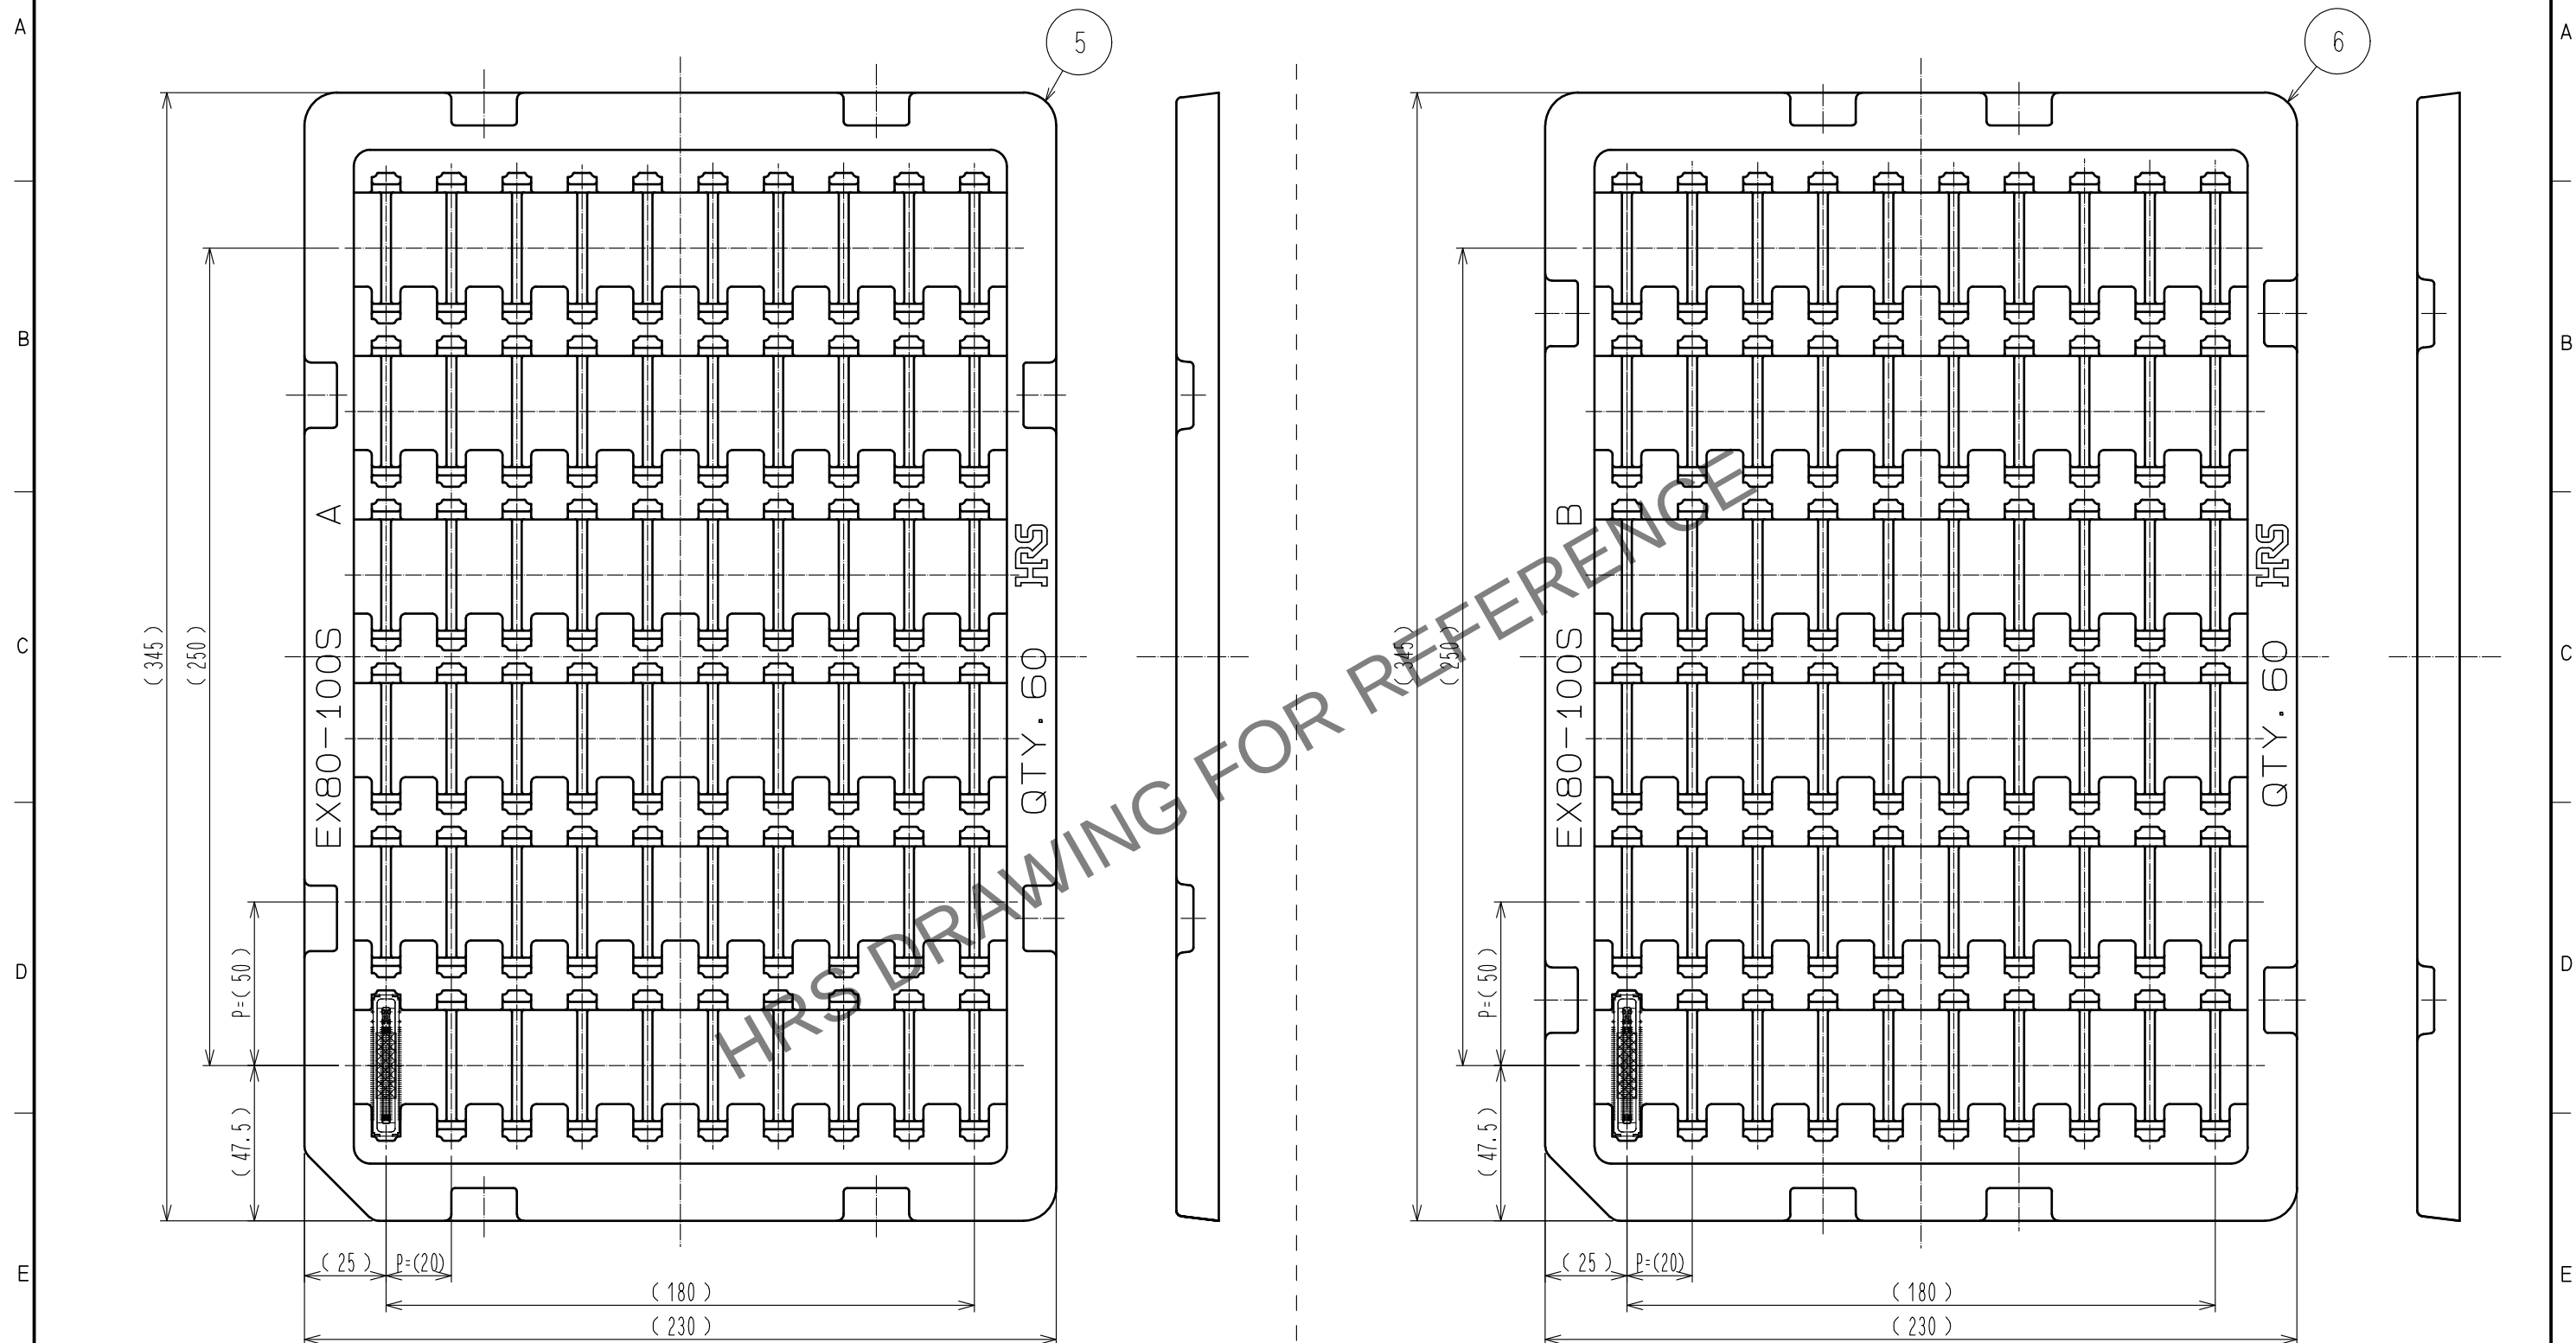

NOTE 6 QUANTITY PER TRAY TO BE 60 PCS MAX.
ORDERING VOLUME TO BE MADE BY QUANTITY OF CONNECTOR.
7 A TYPE AND B TYPE TRAY PILED UP ONE AFTER ANOTHER.

HRS

図番: EDC-122485-30-00
製品名: EX80-100S(30)
製品コード: CL232-0592-2-30

2/2