

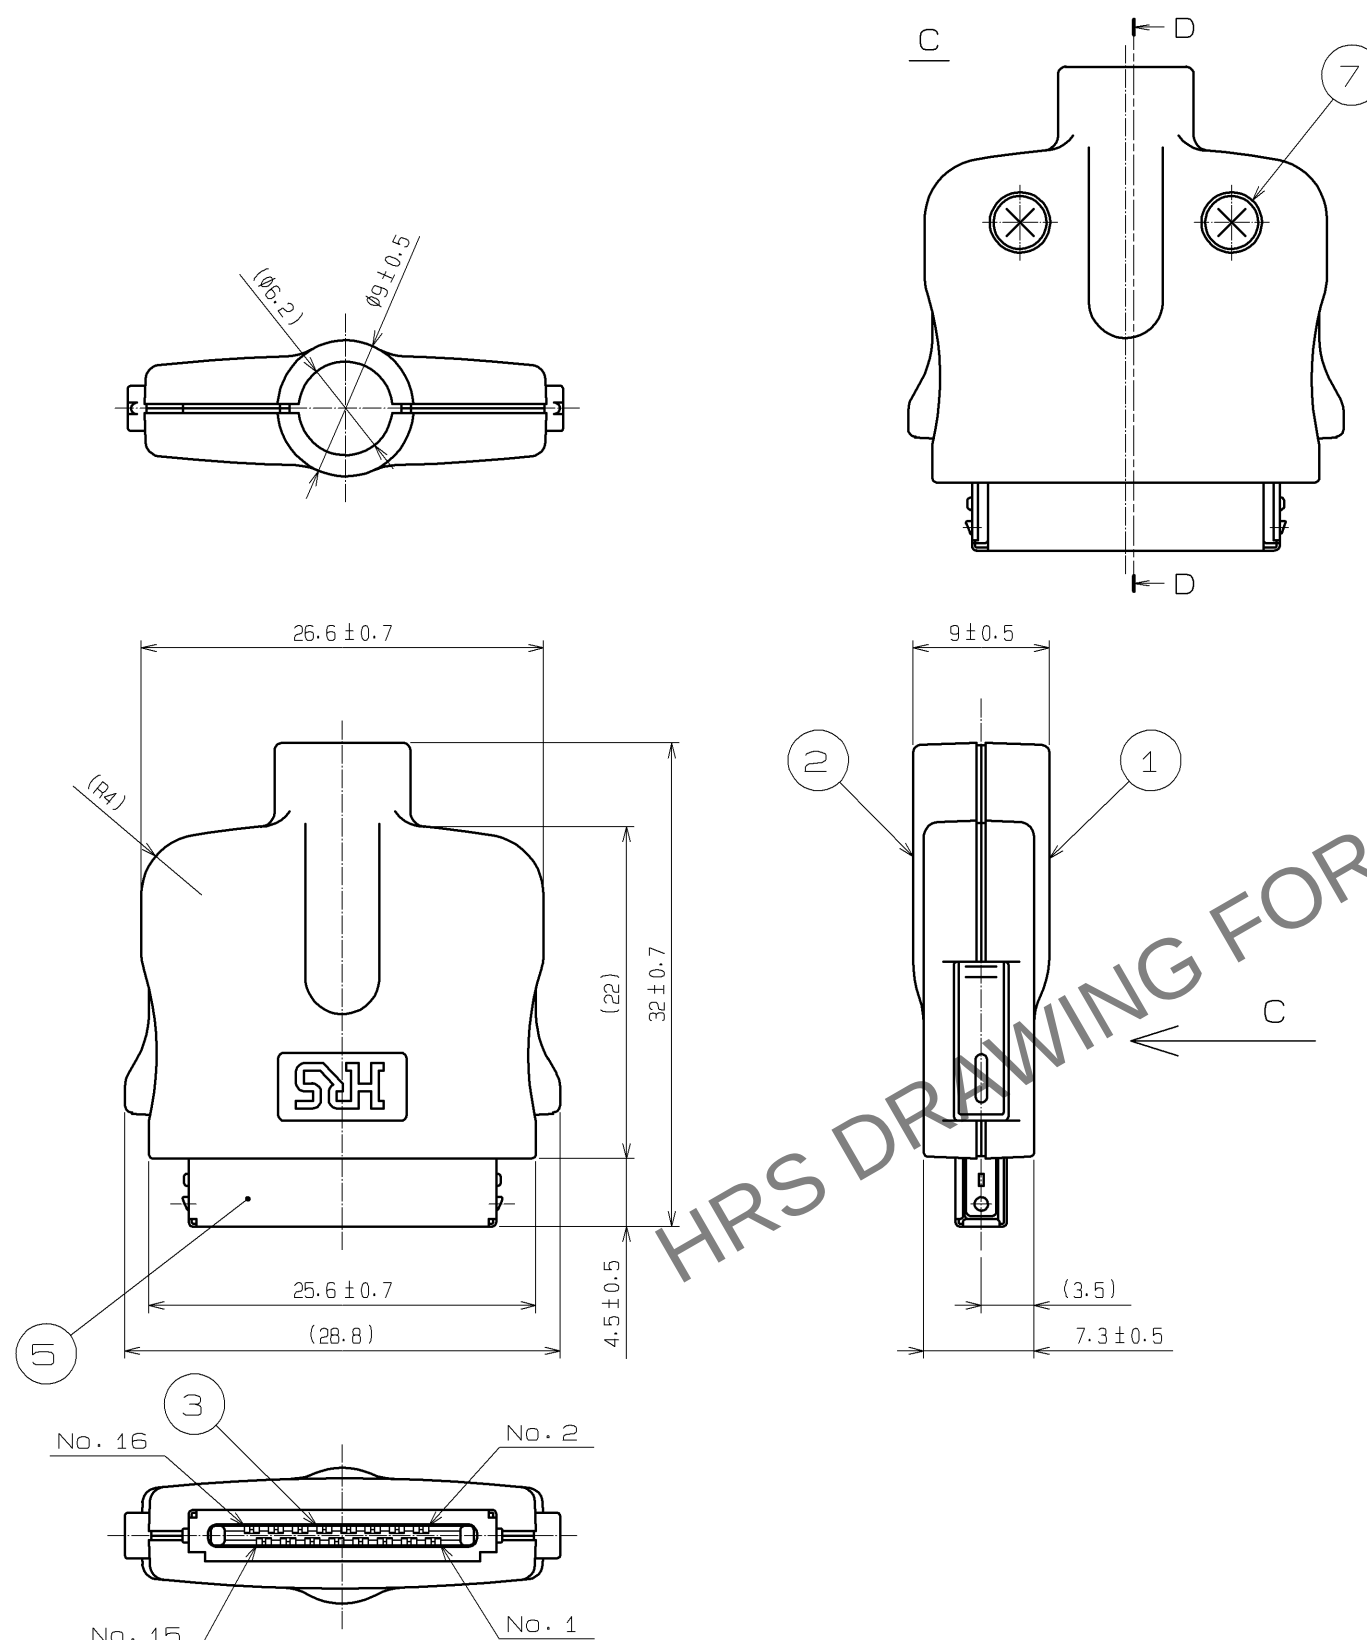


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

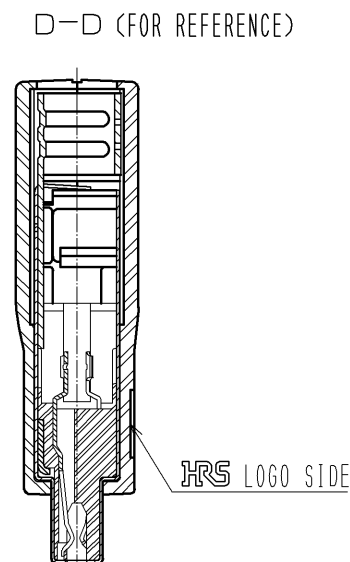


NOTES 1. THIS PRODUCT SHALL BE IN DISASSEMBLED CONDITION (EXCEPT CONNECTOR UNIT ③, ④) WHEN DELIVERED.
2. EACH TERMINATING POINT SHALL BE COVERED WITH HEAT SHRINK TUBE AFTER SOLDERING ASSEMBLY.

CONSTRUCTION INSIDE
(FOR REFERENCE)

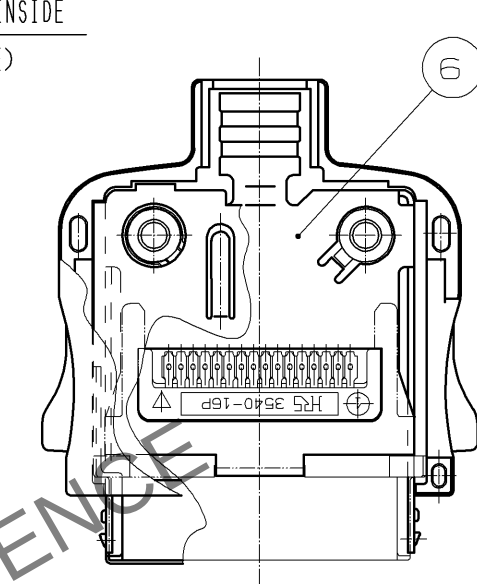

CONNECTOR UNIT

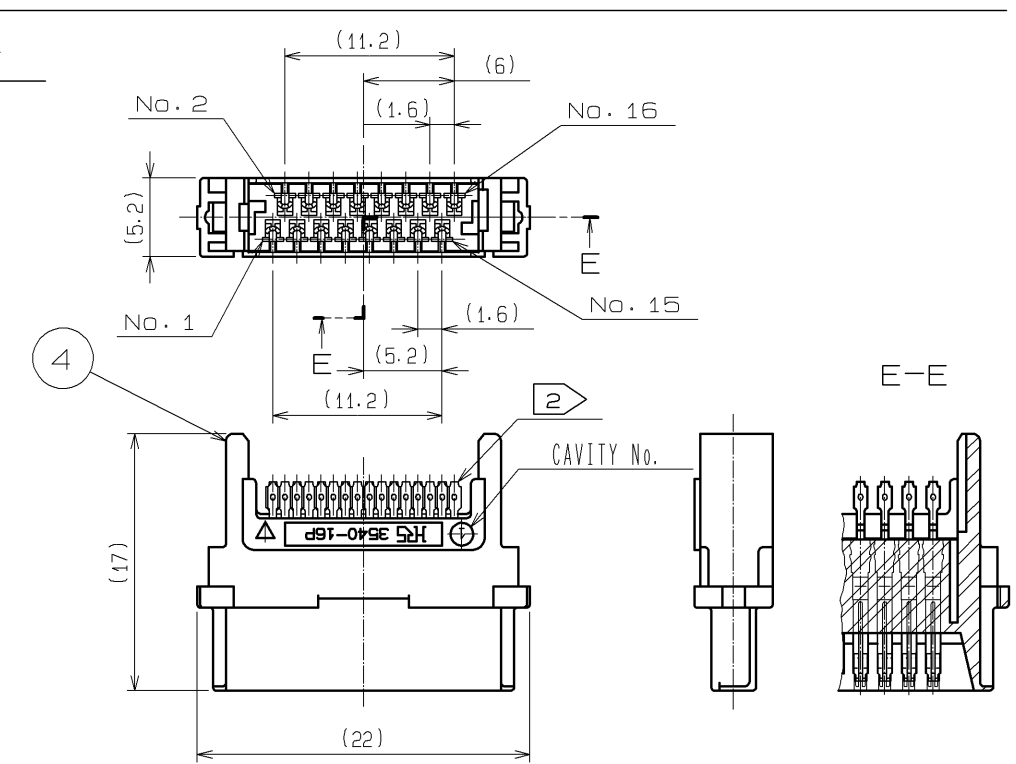

4	POLYAMIDE	BLACK	UL94V-0				
3	COPPER ALLOY	SELECTIVE GOLD PLATING 0.2μm		7	STEEL	BLACK	TAPPING SCREW
2	POLYCARBONATE	BLACK	UL94V-0	△	6	STAINLESS STEEL	
1	POLYCARBONATE	BLACK	UL94V-0	△	5	STAINLESS STEEL	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
				2	DIS-E-004505	TA. ASO	NM. NISHIMATSU	13. 02. 05
HIROSE ELECTRIC CO., LTD.				APPROVED : HO. MIWA	05. 01. 05	DRAWING NO. EDC3-120517-01		
				CHECKED : YH. ENAMI	05. 01. 05	PART NO. 3540-16P-CV(50)		
				DESIGNED : TU. TANIGUCHI	05. 01. 05	CODE NO. CL235-0004-1-50		
				DRAWN : TU. TANIGUCHI	05. 01. 05	1/1		