




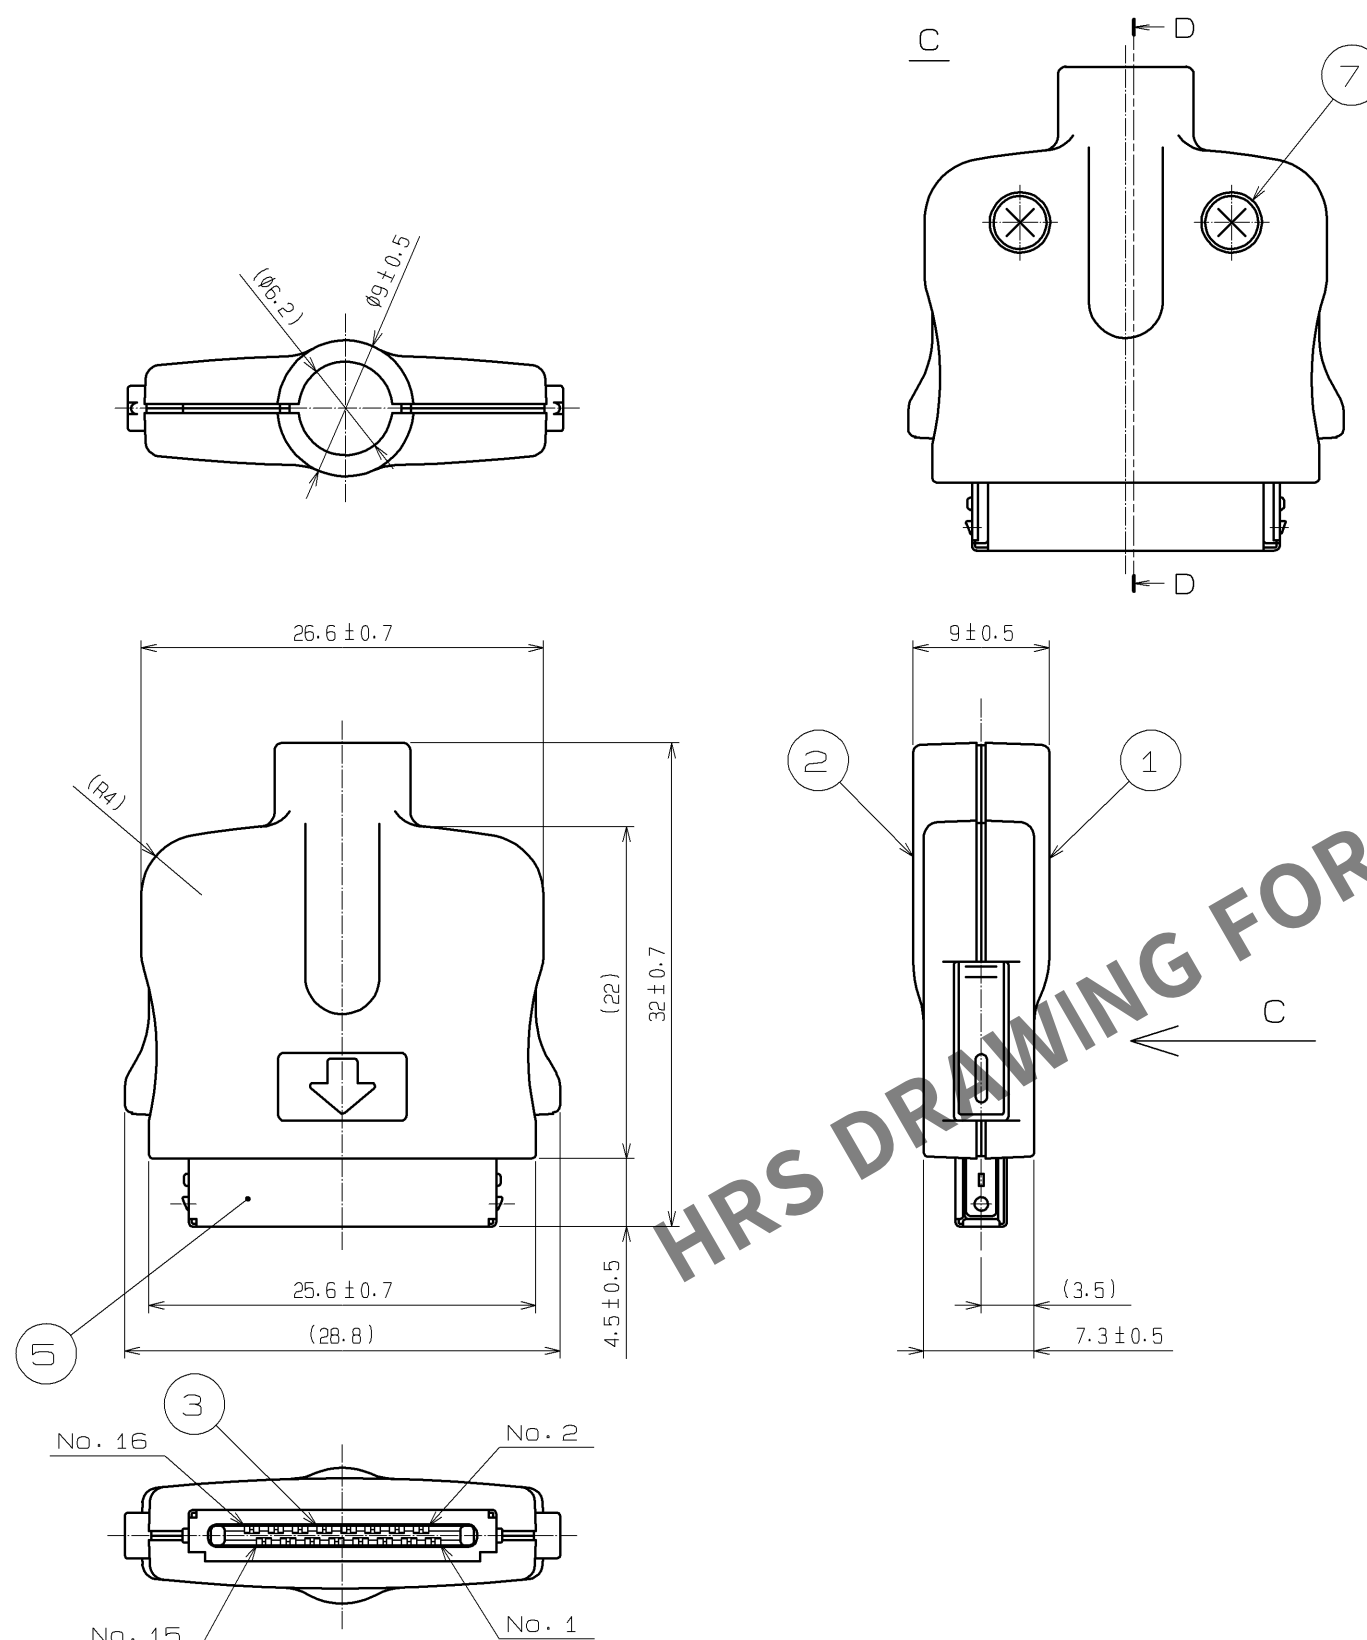

CONSTRUCTION INSIDE
(FOR REFERENCE)

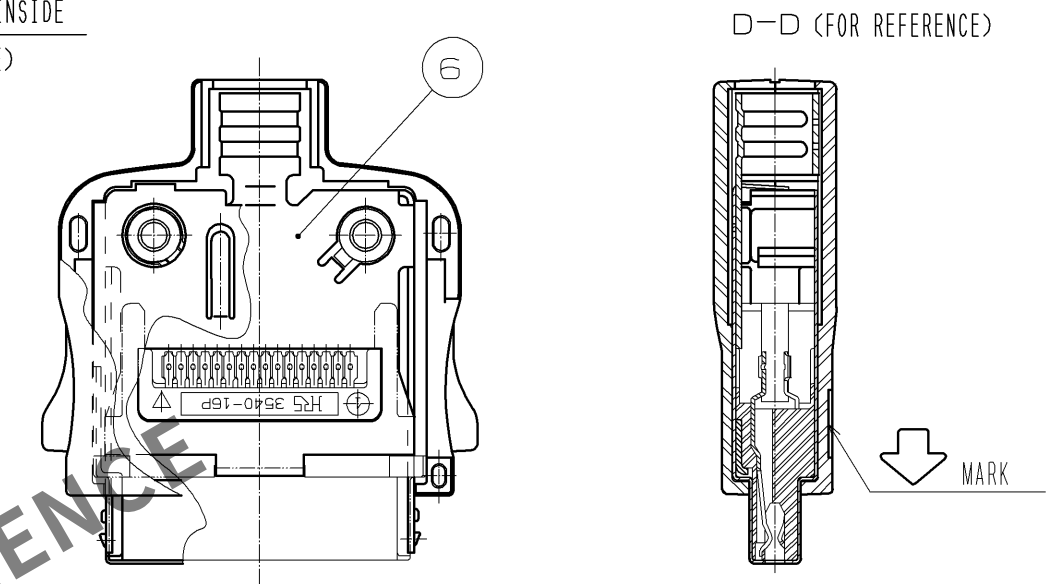

CONNECTOR UNIT

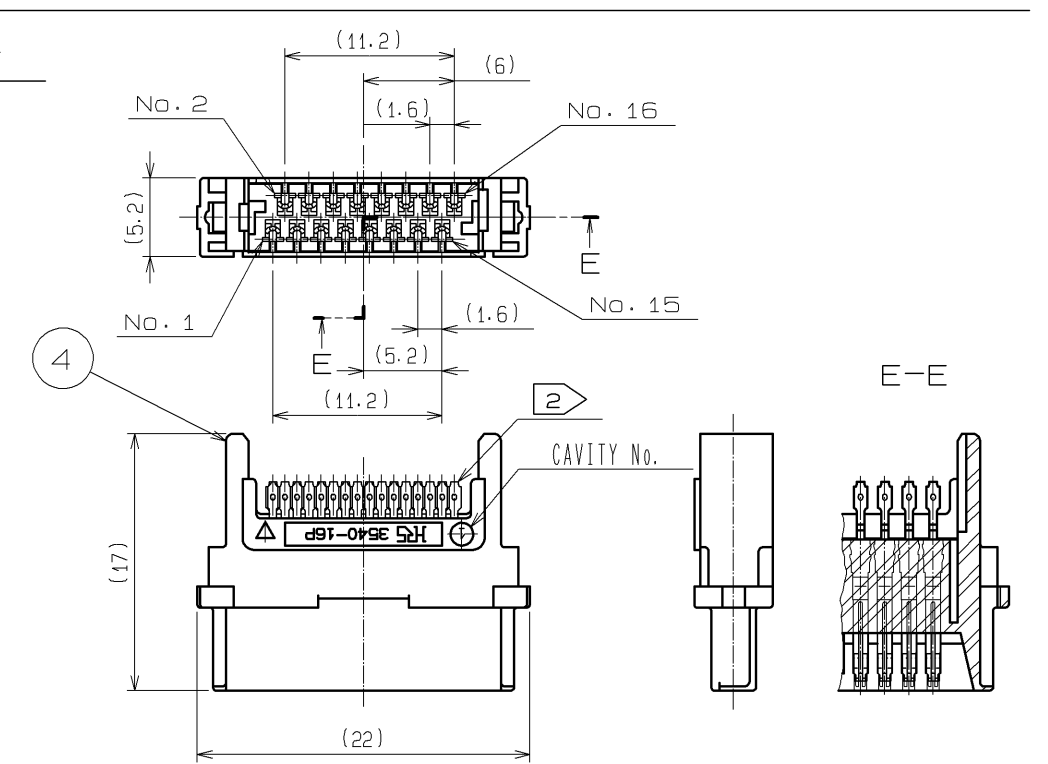

NOTES 1. THIS PRODUCT SHALL BE IN DISASSEMBLED CONDITION
(EXCEPT CONNECTOR UNIT ③, ④) WHEN DELIVERED.
2. EACH TERMINATING POINT SHALL BE COVERED WITH
HEAT SHRINK TUBE AFTER SOLDERING ASSEMBLY.

3	COPPER ALLOY	CONTACT: GOLD PLATING 0.2μm MIN			7	STEEL	BLACK	TAPPING SCREW	
		PALLADIUM PLATING 0.7μm MIN							
		LEAD : GOLD PLATING 0.03μm MIN							
		UNDER : NICKEL PLATING 1.27μm MIN			6	STAINLESS STEEL			
2	POLYCARBONATE	BLACK	UL94V-0	△	5	STAINLESS STEEL			
1	POLYCARBONATE	BLACK	UL94V-0	△	4	POLYAMIDE	BLACK	UL94V-0	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-E-004505		DESIGNED TA. ASO	CHECKED NM. NISHIMATSU	DATE 13.02.05
HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI			08.09.29		DRAWING NO. EDC3-120517-03		
		CHECKED : KI. NAGANUMA			08.09.29		PART NO. 3540-16P-CV(51)		
		DESIGNED : MT. ITANO			08.09.29		CODE NO. CL235-0004-1-51		
		DRAWN : MT. ITANO			08.09.29				