
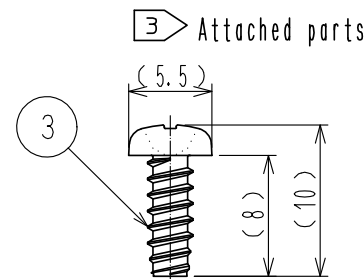
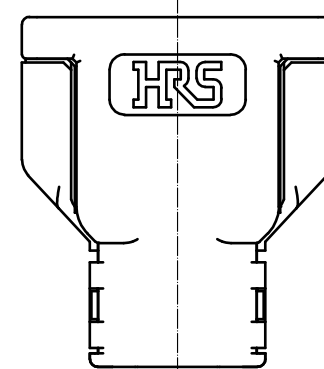
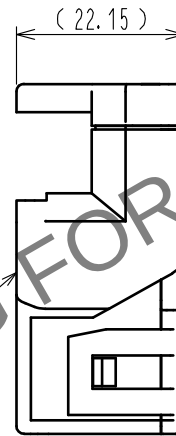

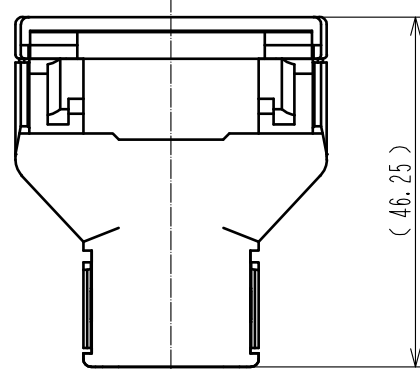




Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Note 1. Please use this product for PS3CS-B-1UP(CL236-1077-0).
Please refer ETAD-E3145 for assembly procedure.
2. Refer to ETAP-E3160 for the packaging specifications.
③ Please use the P-TITE screw for fixing Ref. ① and Ref. ②.
In case of losing P-TITE screws, please order them in PS3CS-1UP-PS(CL236-1081-0-00).
-Recommended P-TITE screw:3×8
-Recommended tightining torque:0.7 to 0.8 N・m

				3	Steel	Nickel plating											
1	PBT	Red.		UL94V-0		2	PBT	Red.		UL94V-0							
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS							
UNITS mm				SCALE 1 : 1				COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE	
 HIROSE ELECTRIC CO., LTD.				APPROVED		: NM. NISHIMATSU		17. 04. 19		DRAWING NO.		EDC-129071-01-00					
				CHECKED		: NM. NISHIMATSU		17. 04. 19		PART NO.		PS3CS-1UP-CVL(C01)					
				DESIGNED		: MO. SHIMOYAMA		17. 04. 19		CODE NO.		CL236-1078-0-01					
				DRAWN		: MO. SHIMOYAMA		17. 04. 19				1		2			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

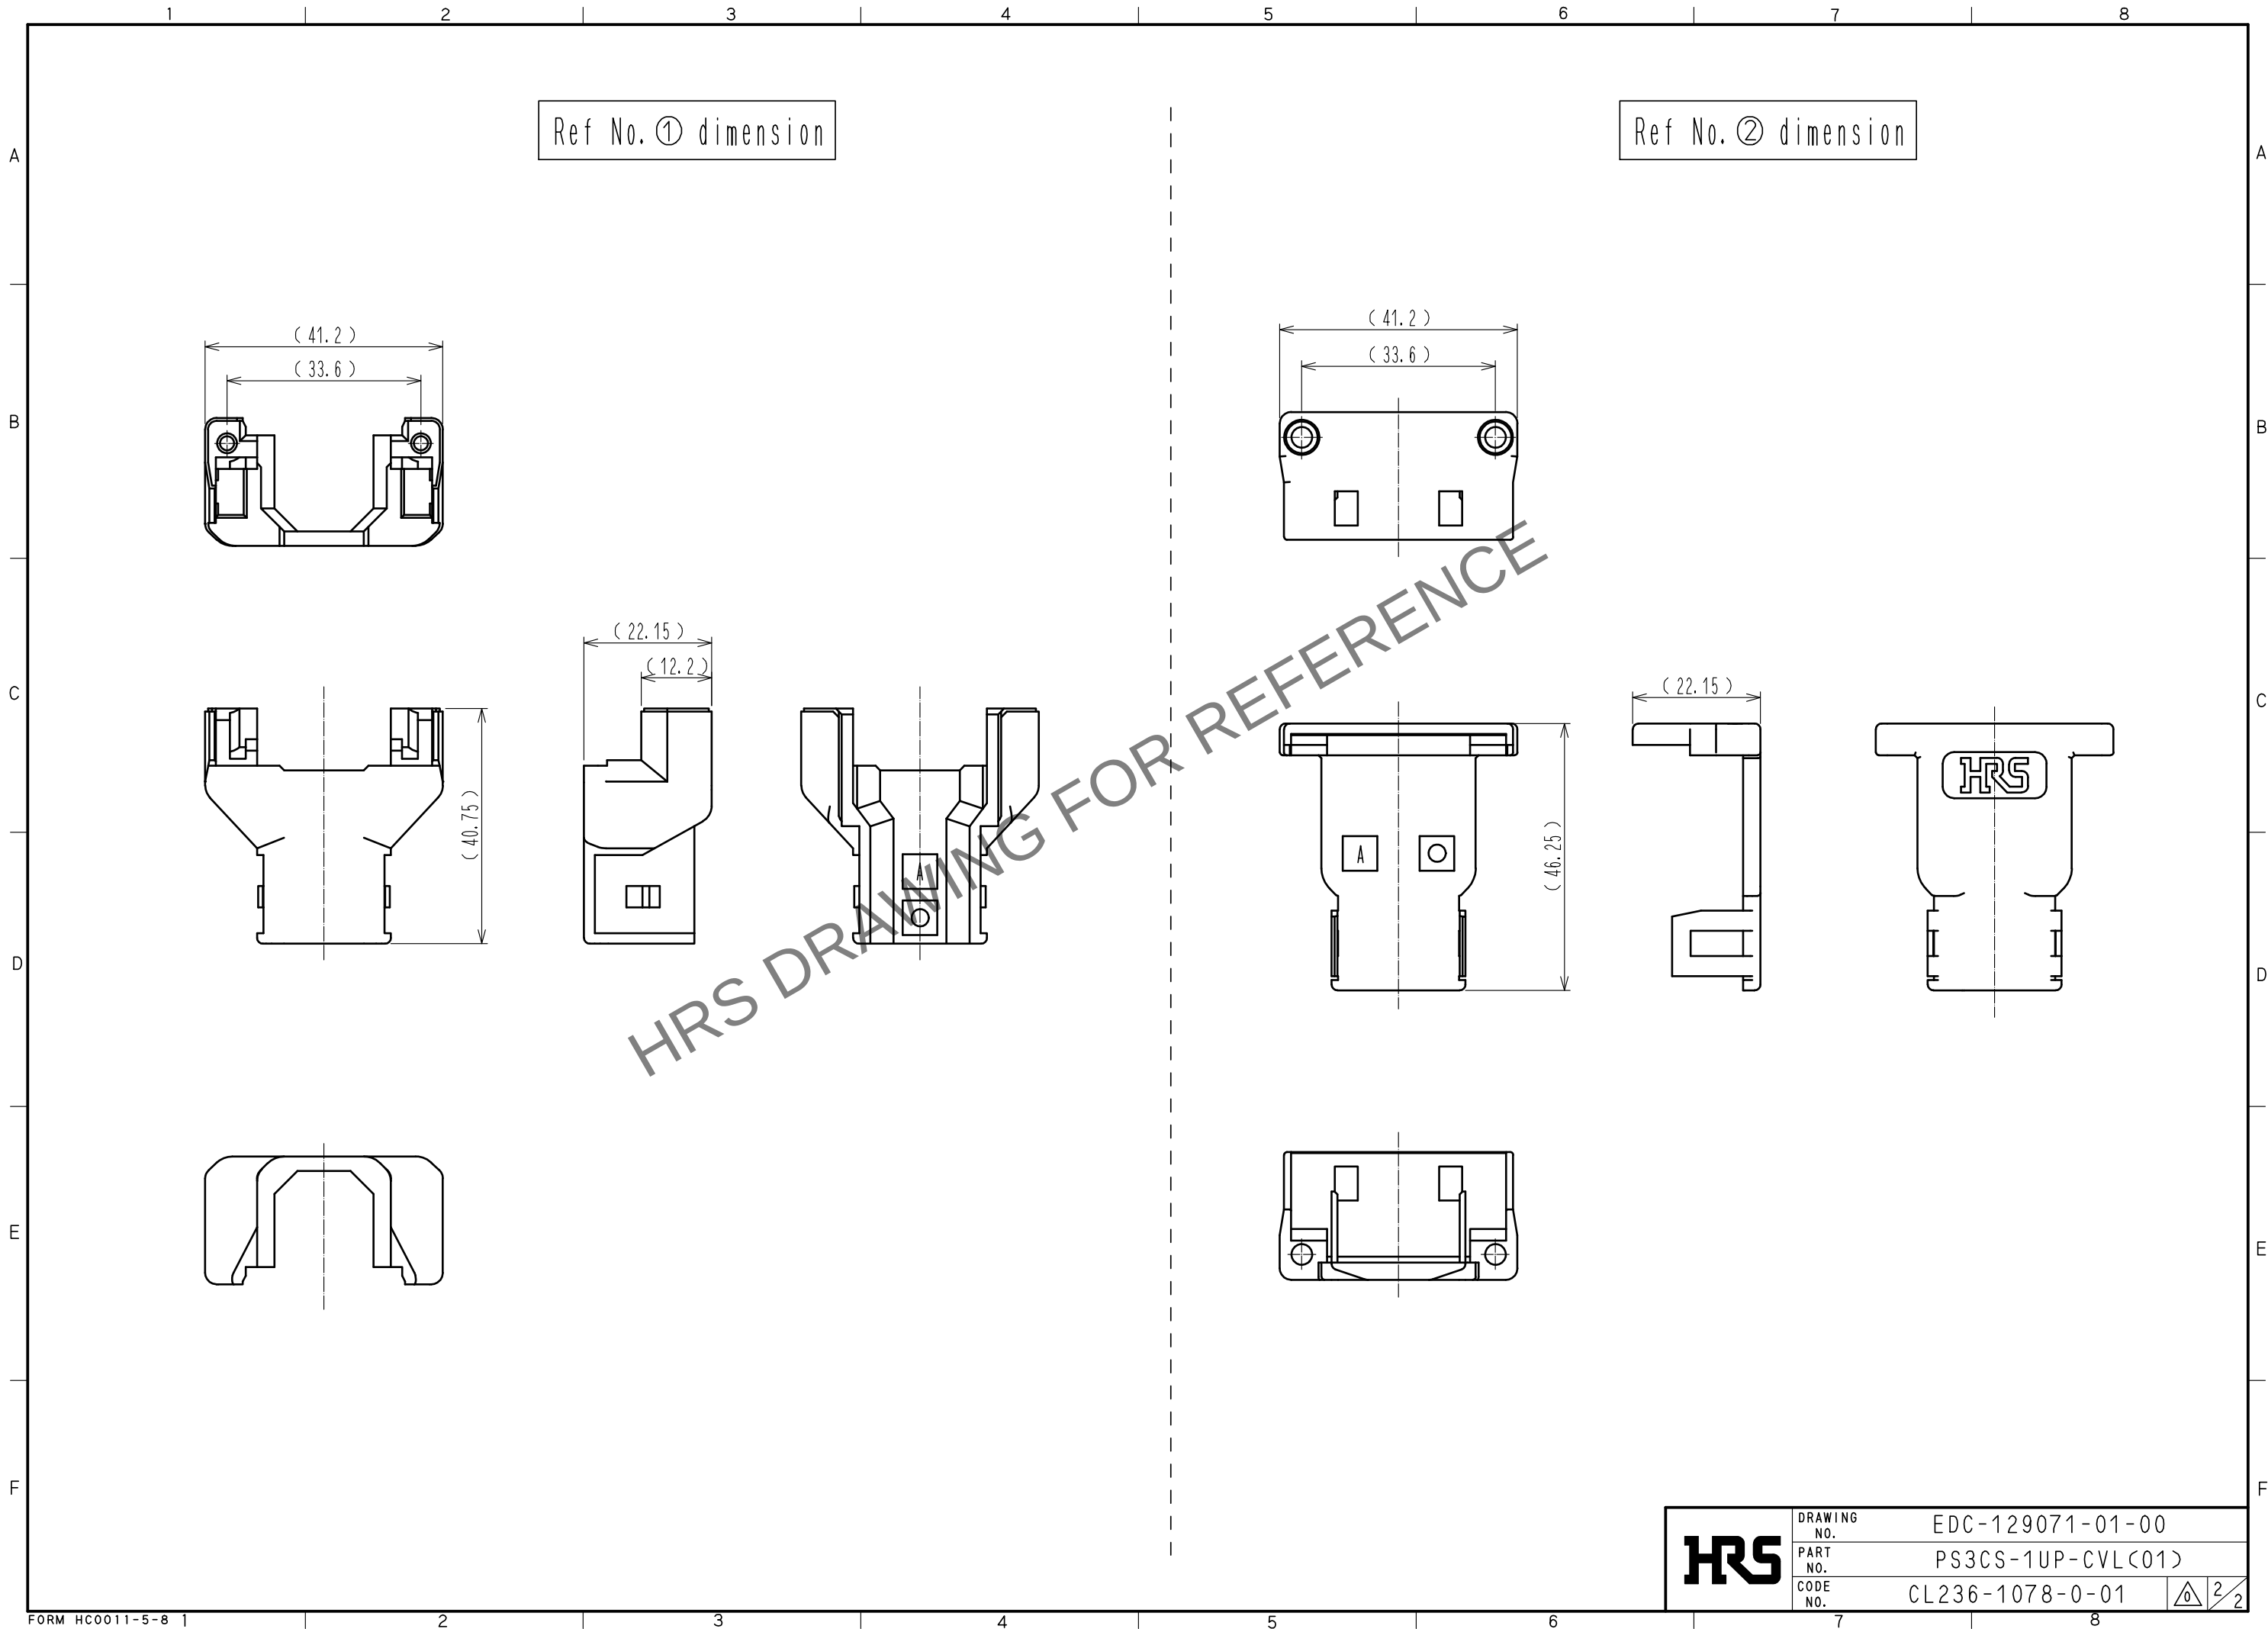

HRS

DRAWING NO.	EDC-129071-01-00
PART NO.	PS3CS-1UP-CVL(01)
CODE NO.	CL236-1078-0-01

2/2