


APPLICABLE STANDARD		IEC 61076-3-124			
Rating	Operating Temperature Range	-40°C TO +85°C(95%RH max) (note1)	Storage Temperature Range	-30°C TO +60°C(95%RH max) (note1)	
	Voltage	50 V AC / 60 V DC	Current	1.5 A/pin (all pin)	
				3 A/pin (pin No.1,2,6,7)	
SPECIFICATIONS					
ITEM	TEST METHOD		REQUIREMENTS	QT	AT
CONSTRUCTION					
General Examination	Examined visually and with a measuring instrument.		According to drawing.	X	X
Marking	Confirmed visually.		According to drawing.	X	X
ELECTRIC CHARACTERISTICS					
Contact Resistance	Measured at 100 mA max (DC or 1000 Hz).		Contact : 30 mΩ max. Shield : 100 mΩ max.	X	—
Insulation Resistance	Measured at 500 V DC.		500 MΩ min.	X	—
Voltage Proof	500 V DC applied for 1 min. Current leakage 2mA max.		No flashover or breakdown.	X	—
Insertion Loss	Measured in the range of 1 to 500 MHz.		0.02 √(f) dB max. (Whenever the formula results in a value less than 0.1 dB, the requirement shall revert to 0.1 dB.)	X	—
Return Loss	Measured in the range of 1 to 500 MHz.		68 – 20log(f) dB min. (Whenever the formula results in a value greater than 30 dB, the requirement shall revert to 30 dB.)	X	—
Near end Crosstalk	Measured in the range of 1 to 500 MHz.		94 – 20log(f) dB min. (1MHz to 250MHz) 46.04 – 30log(f/250) dB min. (250MHz to 500MHz) (Whenever the formula results in a value greater than 75 dB, the requirement shall revert to 75 dB.)	X	—
Far end Crosstalk	Measured in the range of 1 to 500 MHz.		83.1 – 20log(f) dB min. (Whenever the formula results in a value greater than 75 dB, the requirement shall revert to 75 dB.)	X	—
Transverse Conversion Loss	Measured in the range of 1 to 500 MHz.		68 – 20log(f) dB min. (Whenever the formula results in a value greater than 50 dB, the requirement shall revert to 50 dB.)	X	—
Transverse Conversion Transfer Loss	Measured in the range of 1 to 500 MHz.		68 – 20log(f) dB min. (Whenever the formula results in a value greater than 50 dB, the requirement shall revert to 50 dB.)	X	—
MECHANICAL CHARACTERISTICS					
Insertion and Withdrawal Forces	A maximum rate of 50 mm/min. Measured with an applicable connector.		Insertion force 25 N max. Withdrawal force 25 N max.	X	—
Mechanical Operation	5000 times insertions and extractions. Mating speed : 10 mm/s max. Rest : 5s, min.(unmated)		1) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 2) No damage, cracks or looseness of parts.	X	—
Vibration	Frequency 10 to 500 Hz 0.35 mm, 50 m/s ² 2hrs in each of 3 mutually perpendicular axis.		1) No electrical discontinuity of 1μs. 2) No damage, cracks or looseness of parts.	X	—
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	3 △ 1	DIS-E-00001800	JY.IGA	KI.NAGANUMA	20181005
Note				APPROVED	RI.TAKAYASU 20170331
Note 1. Non-condensing.				CHECKED	KI.NAGANUMA 20170331
Unless otherwise specified, refer to IEC 60512.				DESIGNED	SG.CHAMURA 20170331
				DRAWN	SG.CHAMURA 20170331
Note	QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO.	ELC-129430-01-00	
HRS	SPECIFICATION SHEET		PART NO.	IX61G-A-10P (01)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL251-0021-0-01	△ 1/3

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.
May.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

SPECIFICATIONS					
ITEM	TEST METHOD	REQUIREMENTS	QT	AT	
Fretting Corrosion	490 m/s ² , 30 times/min at 1000 times.	1) No electrical discontinuity of 1μs. 2) No damage, cracks or looseness of parts.	X	—	
Shock	Subject mated specimens to 300 m/s ² half-sine shock pulses of 11 milliseconds duration, 3 shocks in both directions of 3 mutually perpendicular directions (totally 18 shocks)	1) No electrical discontinuity of 1μs. 2) No damage, cracks or looseness of parts.	X	—	
Lock Strength	Applying 80 N force for the mating axis direction in state in fitted with applicable connector.	No unlocking, damage, cracks or looseness of parts.	X	—	
Wrenching Strength	Applying 25times of 30 N 1s for 2 axis direction on tip of plug case in state in fitted with applicable connector.	No damage, cracks or looseness of parts.	X	—	
ENVIRONMENTAL CHARACTERISTICS					
Rapid Change of Temperature	Subject mated specimens to 10 cycles between -55°C and 85°C with 30 minutes dwell at temp. extremes and 1 minute transition between temperatures.	1) Voltage proof : 500 V DC applied for 1 min. Current leakage 2mA max. No flashover or breakdown. 2) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 3) Insulation resistance: 500 MΩ min. (at dry) 4) No damage, cracks or looseness of parts.	X	—	
Humidity / Temperature Cycling	Low temperature 25 °C; High temperature 65 °C; Cold sub-cycle - 10 °C; Relative humidity 93 % Duration 10 / each 24 h (IEC 60068-2-38,test Z / AD)	1) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 2) Insulation resistance: 500 MΩ min. (at dry) 3) No damage, cracks or looseness of parts.	X	—	
Damp Heat, Steady State	Subject mated specimens to a relative humidity of 93 % at a temperature of 40°C during 21 days.	1) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 2) Insulation resistance: 500 MΩ min. (at dry) 3) No damage, cracks or looseness of parts.	X	—	
Dry Heat	Subject to +85 ± 2 °C, 21 days. (mating applicable connector)	1) Resistance: contact : 80 mΩ max. shield : 100 mΩ max. 2) Insulation resistance: 500 MΩ min. (at dry) 3) No damage, cracks or looseness of parts.	X	—	
Cold	Subject to -55 ± 3 °C, 10 days. (mating applicable connector)	1) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 2) Insulation resistance: 500 MΩ min. (at dry) 3) No damage, cracks or looseness of parts.	X	—	
Corrosion Salt Mist	Subject to 5 % salt water, 35 ± 2 °C, 48h. (leave under unmated condition.)	No heavy corrosion of contacts.	X	—	
Mixed Flowing Gas Corrosion	Test temperature : +25±1 °C, Relative humidity : 75±3 % H ₂ S : 10±5 ppb, NO ₂ : 200±50 ppb Cl ₂ : 10±5 ppb, SO ₂ : 200±20 ppb Leave the samples for 4 days with mated. The same is performed with unmated samples. (IEC 60512, method 4)	1) Resistance: Contact : 80 mΩ max. Shield : 100 mΩ max. 2) No damage, cracks or looseness of parts.	X	—	
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC-129430-01-00
HRS	SPECIFICATION SHEET		PART NO.	IX61G-A-10P (01)	
	HIROSE ELECTRIC CO., LTD.		CODE NO	CL251-0021-0-01	 2/3

May.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SPECIFICATIONS

ITEM	TEST METHOD	REQUIREMENTS	QT	AT
Solderability	Soldering point immersed in solder bath of $+245 \pm 3$ °C, 3 sec. (using type r flux)	Solder shall cover minimum of 95 % of The surface being immersed.	X	—
Resistance to Soldering Heat	A profile is shown in Fig-1, under 2 cycles.	No deformation or significant looseness of contacts.	X	—

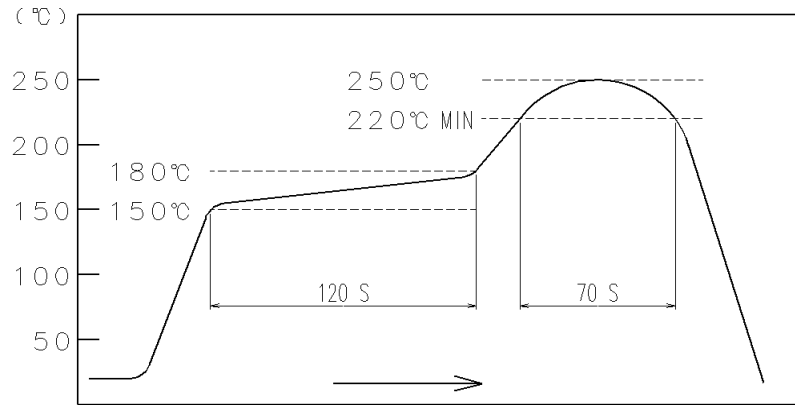


Fig – 1 Resistance to soldering heat
(temperature at top surface of connector)

Recommended profile refers to Fig – 2.
(temperature at SMT leads)

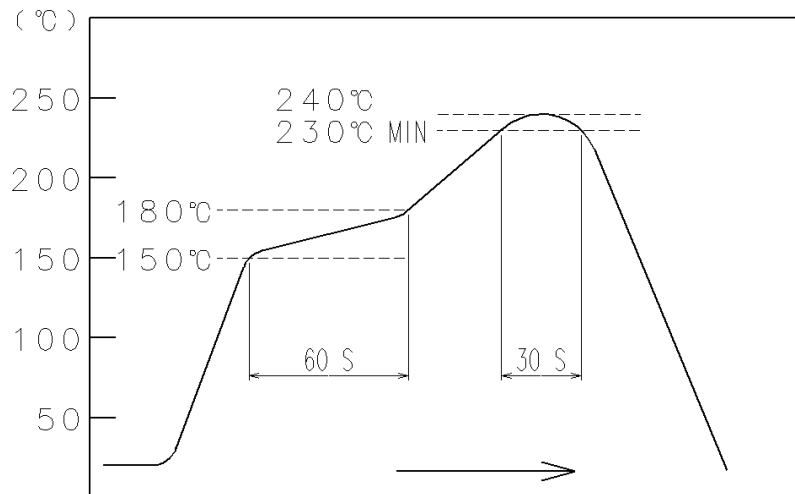


Fig – 2 Recommended reflow profile temperature

Note QT:Qualification Test AT:Assurance Test X:Applicable Test		DRAWING NO. ELC-129430-01-00	
HRS	SPECIFICATION SHEET	PART NO.	IX61G-A-10P (01)
	HIROSE ELECTRIC CO., LTD.	CODE NO	CL251-0021-0-01
			3/3