



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

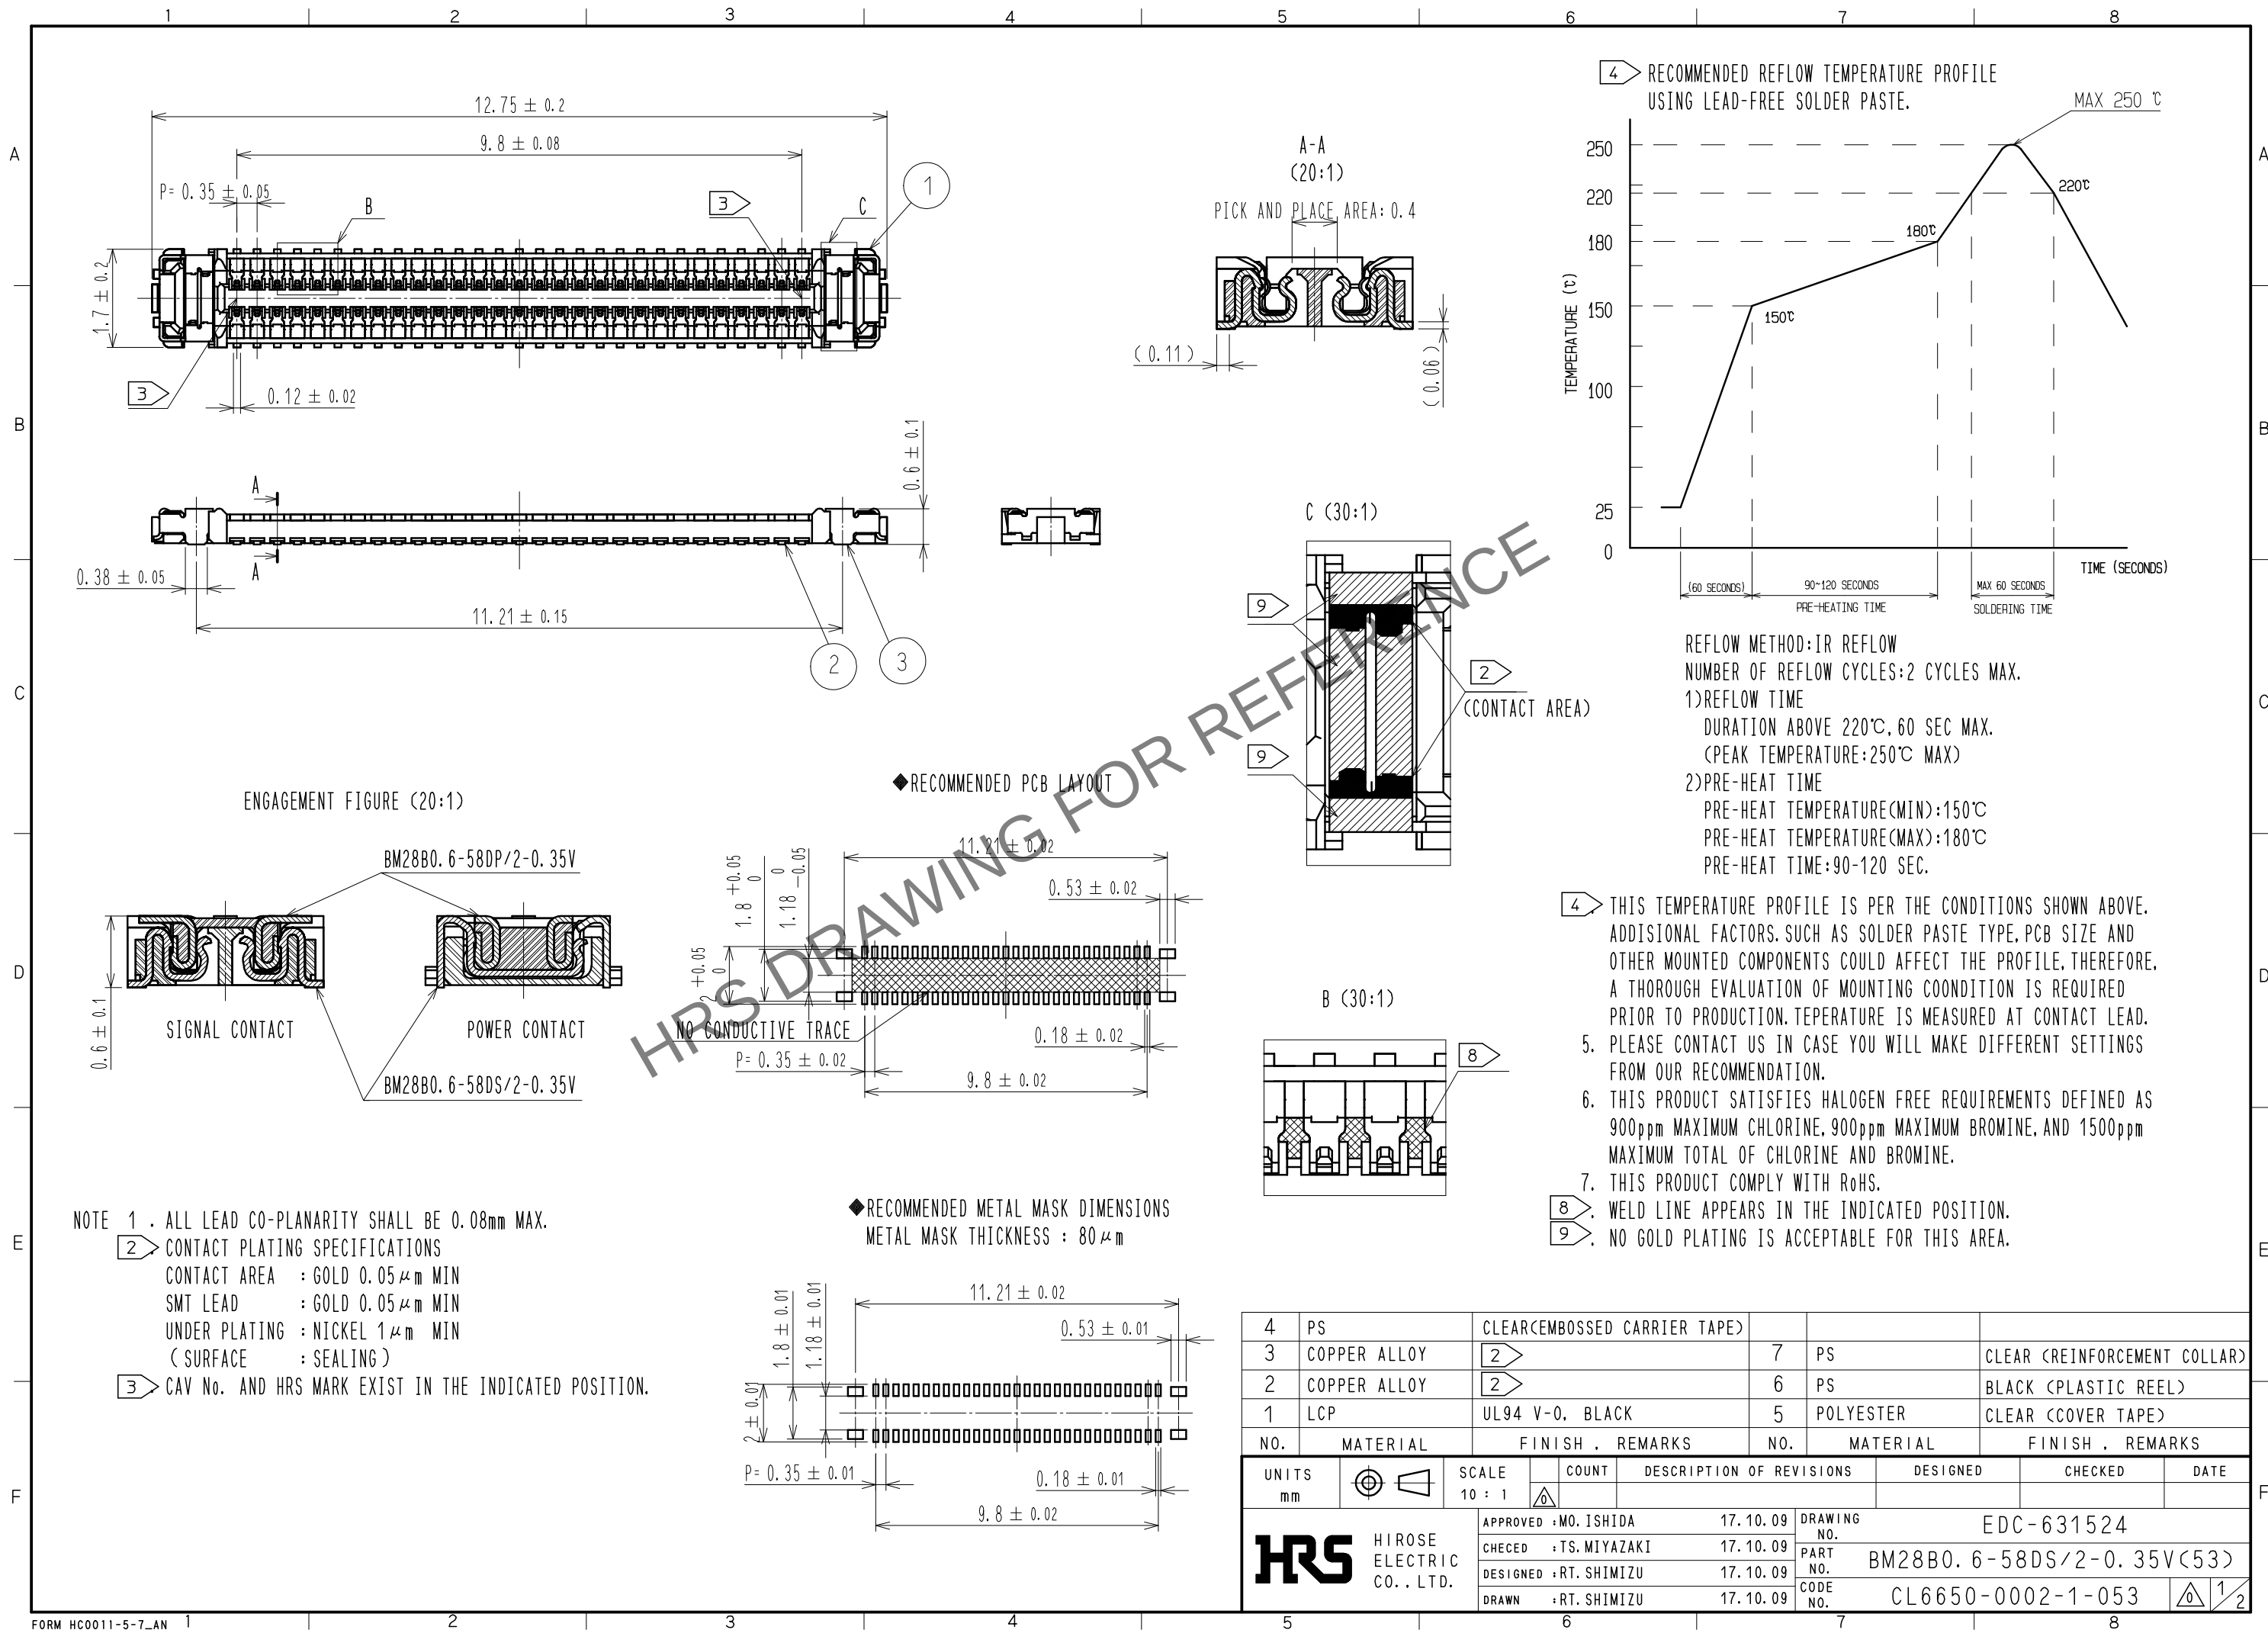


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


EMBOSSED CARRIER TAPE PACKAGING (5:1)

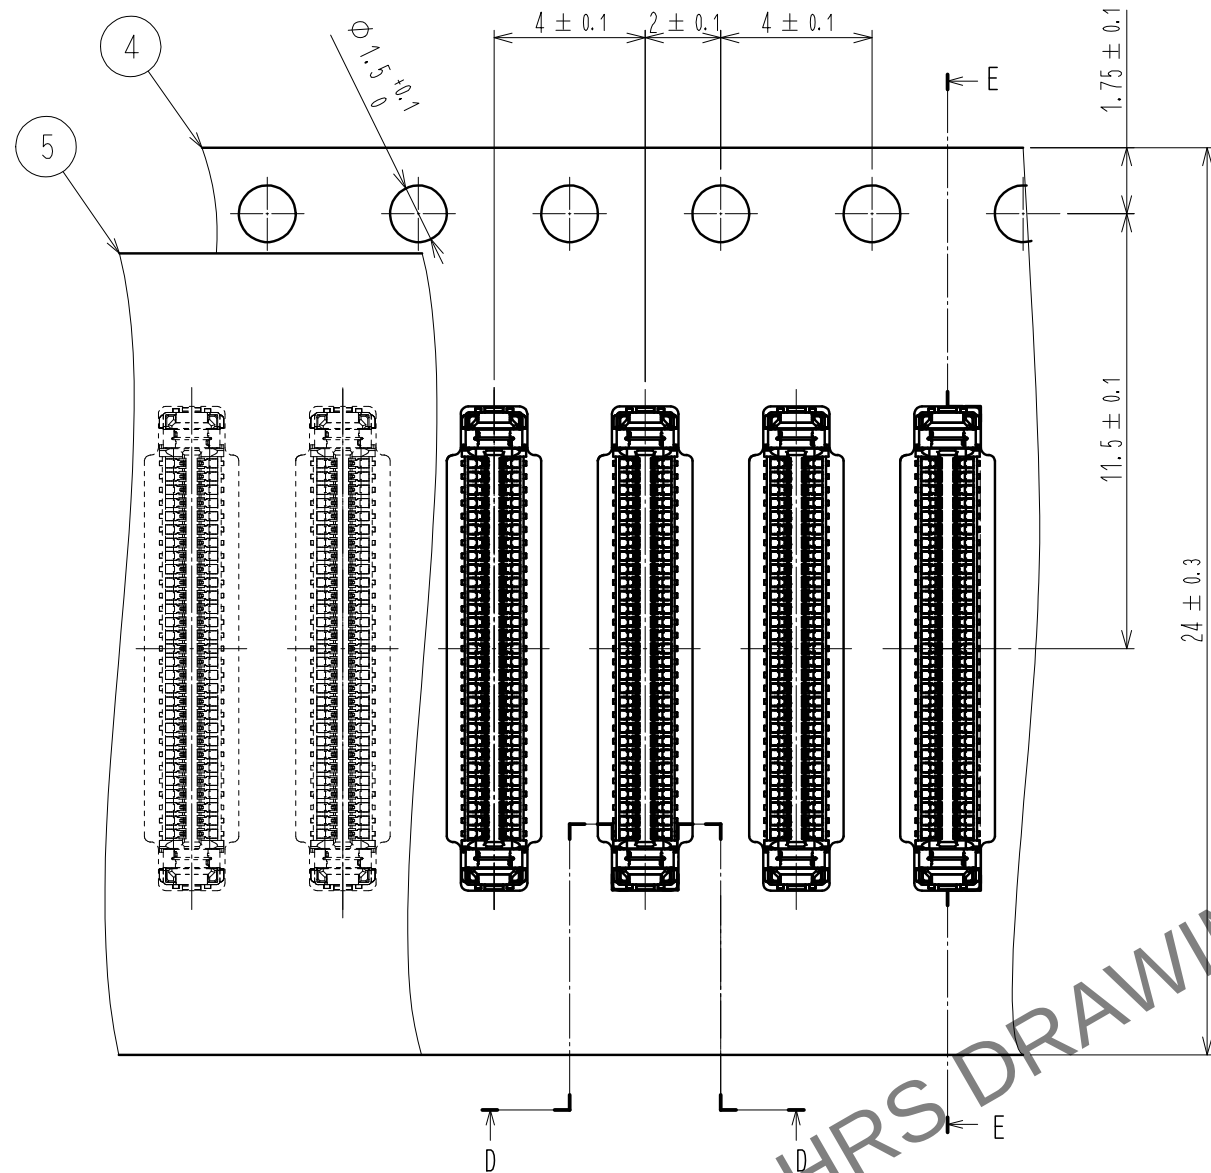


E-E (5:1)

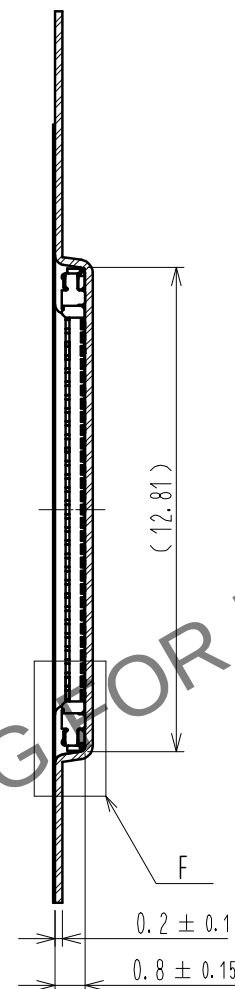



D-D (5:1)

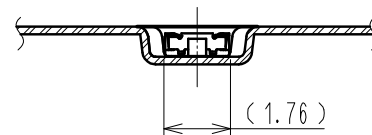

DIRECTION OF UNREELING





F (10:1)

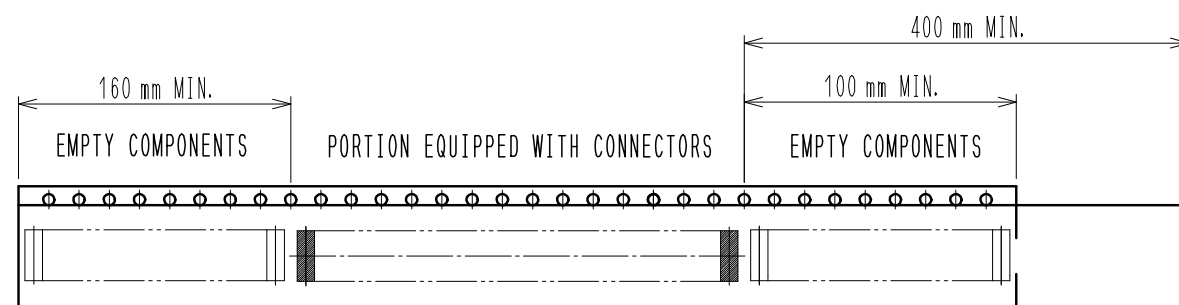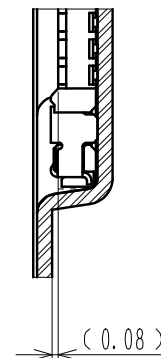

12 TAPING(FREE)

LEADER

STYLE AND DIMENSION OF REEL (FREE)

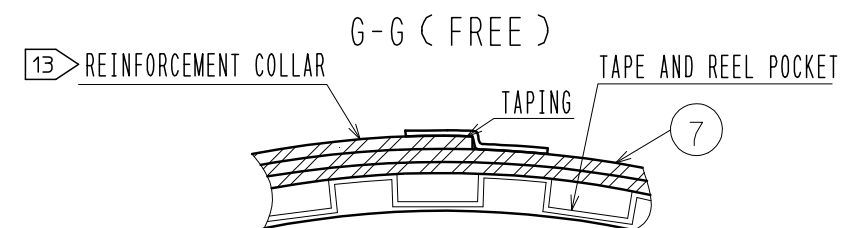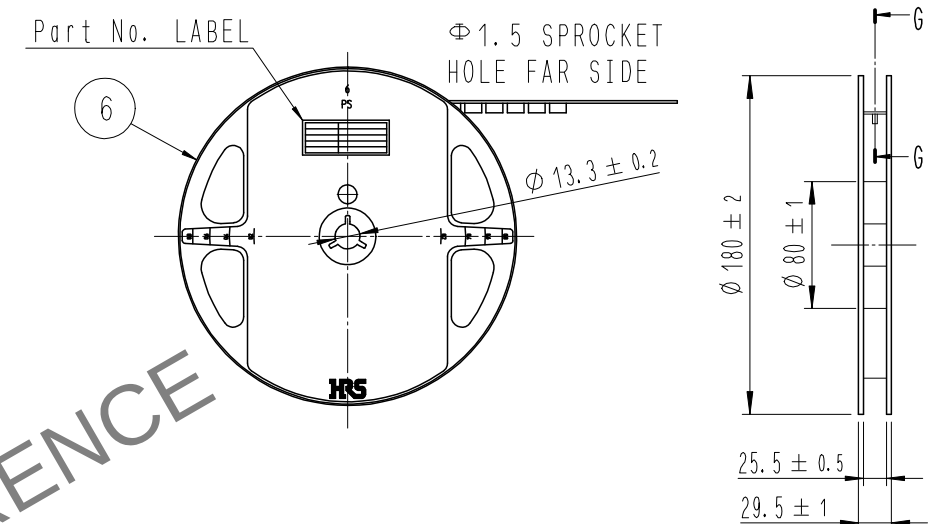

DETAIL OF PART NO. LABEL

製造年月日	** ** *
製品コード	CL6650-***-**
製品名	BM28B0.6-**
数量	1,000
納入者	ヒロセ電機(株)

DATA OF MANUFACTURED
CODE NO.
PART NO.
QUANTITY
SUPPLIER

10. PER REEL 1,000 CONNECTORS.
11. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
12. REFER TO JIS C 0806, IEC 60286-3(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)
13. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC3-631524
PART NO.	BM28B0.6-58DS/2-0.35V(53)
CODE NO.	CL6650-0002-1-053