

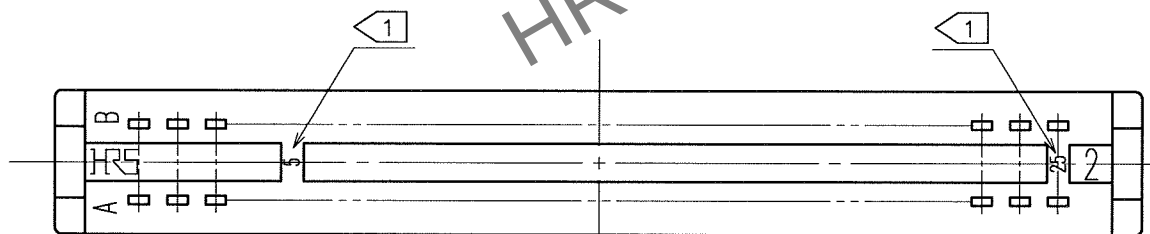
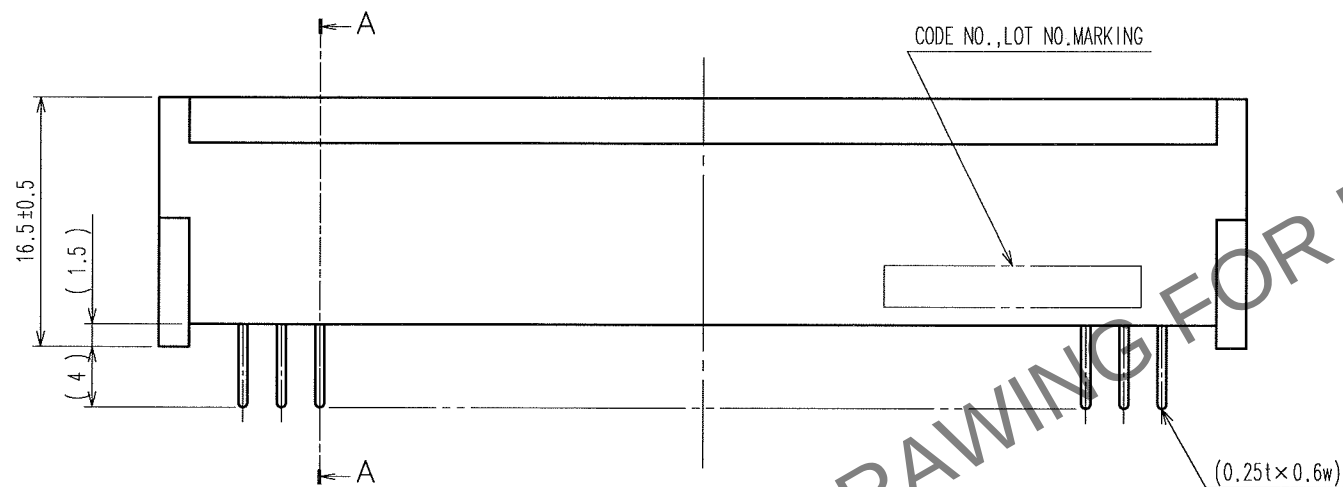


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


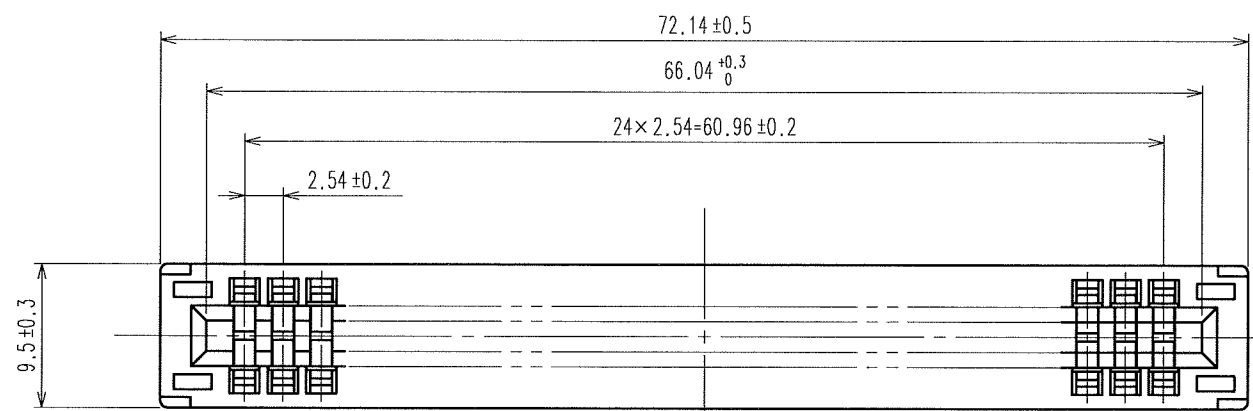


- NOTE 1 CONTACT NO. (5, 10, 15, 20, 25)
2 A POLARIZING KEY INSERTED BETWEEN THE FOLLOWING CONTACT POSITIONS.
(5~6), (10~11), (15~16), (20~21)

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

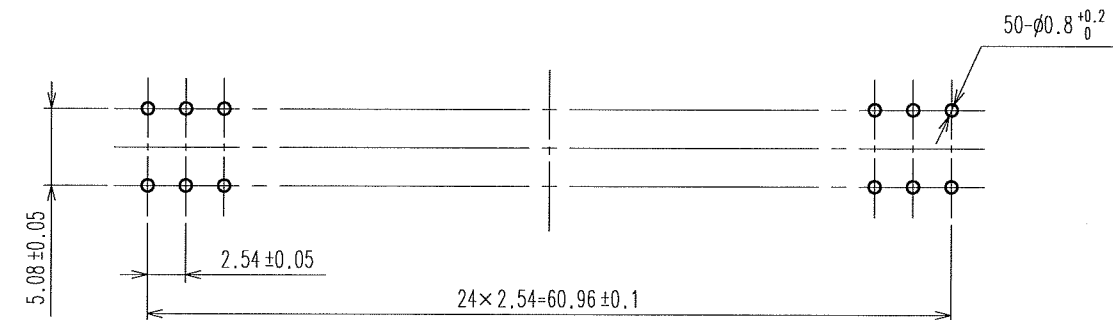

RECOMMENDED PC BOARD HOLE PATTERN(t=1.6±0.1)

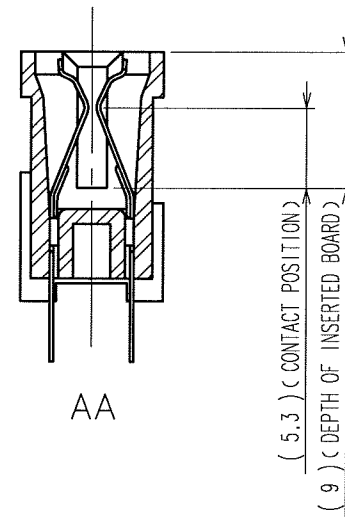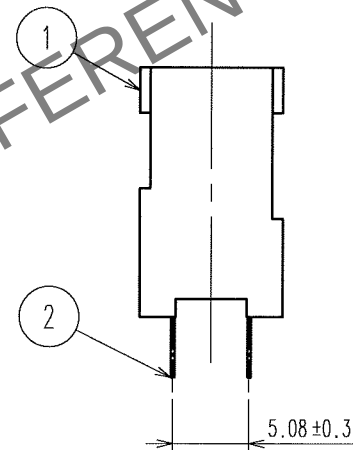

2	PHOSPHOR BRONZE	CONTACT AREA: Ni2.5μ m+Au0.03μ m
		DIP AREA: Ni2.5μ m+Sn2μ m
1	PBT	BLACK UL94V-0
NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN H. Saitou 06.06.06	DESIGNED H. Saitou 06.06.06	CHECKED J. Tomieda 06.06.19	APPROVED K. Higuma 06.06.19	RELEASED .
SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-017785-01 HRS HIROSE ELECTRIC CO., LTD		PART NO. CR22A-50D-2.54DS(70) CODE NO. CL522-0004-0-70		

1/1