

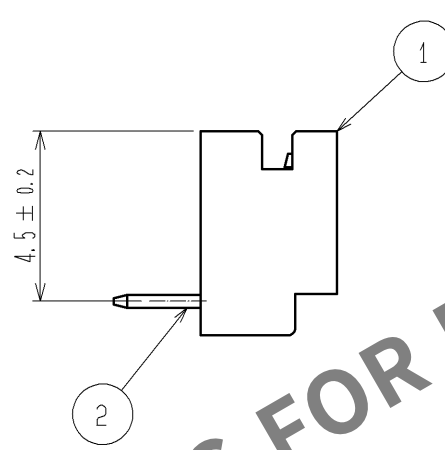
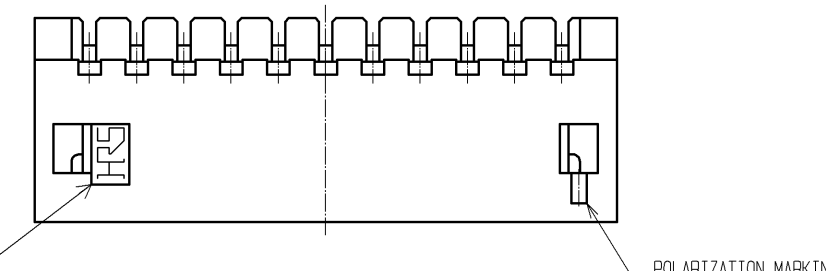
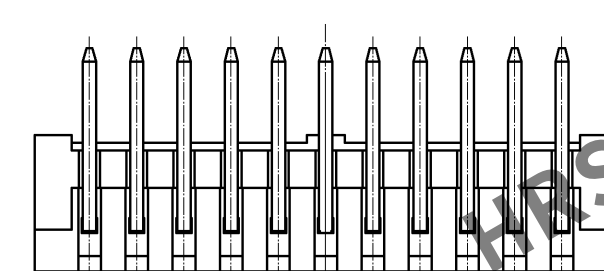
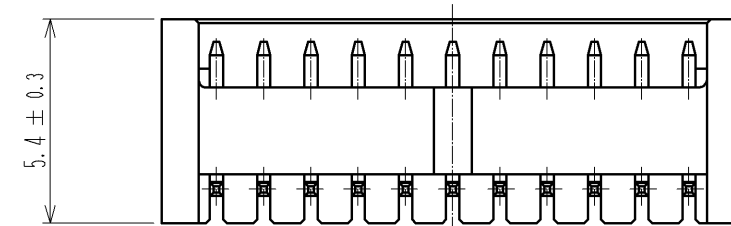



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

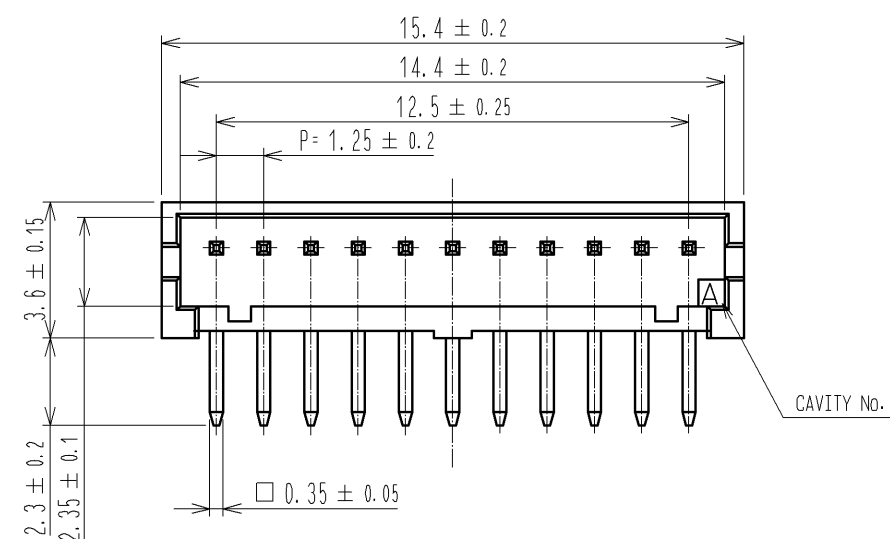

1 APPLICATION FIGURE

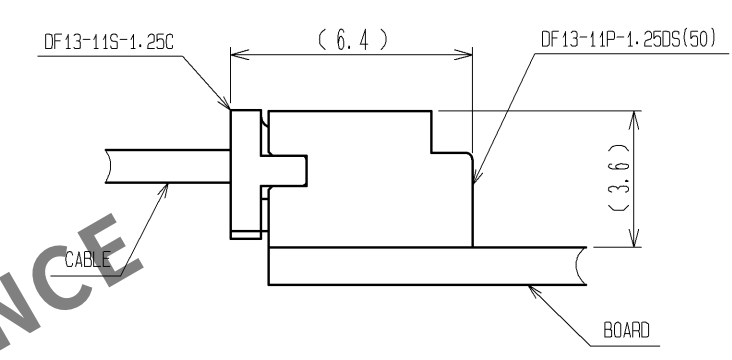

RECOMMENDED PATTERN (BOARD THICKNESS 1mm)

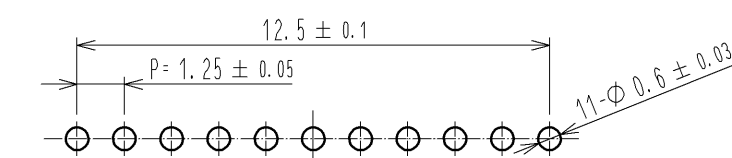

NOTE 1 WHEN THIS CONNECTOR MATES WITH DF13-11S-1.25C, THE MATING LENGTH IS 6.4mm.

2	BRASS	SURFACE:GOLD PLATED 0.2μm min. UNDER:NICKLE PLATED 0.5μm min.		4	ELASTOMER	STOPPER, GRAY			
1	POLYAMIDE	BEIGE(NATURAL), UL94V-0		3	P S	ELECTROSTATIC PROTECTION, CLEAR			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA		08.09.01	DRAWING NO.		EDC3-081824-02		
		CHECED : TS. KUMAZAWA		08.08.29	PART NO.		DF13-11P-1. 25DS(50)		
		DESIGNED : SN. KOBAYASHI		08.08.28	CODE NO.		CL536-0160-8-50		
		DRAWN : SN. KOBAYASHI		08.08.28			 1/2		
5			6		7		8		

