

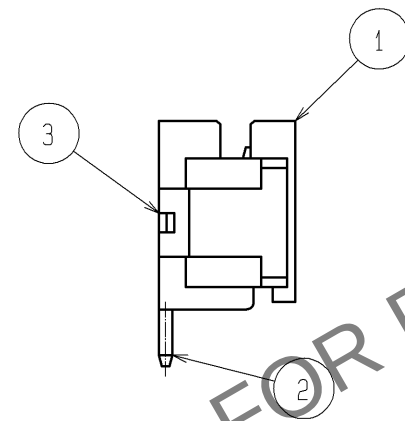



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

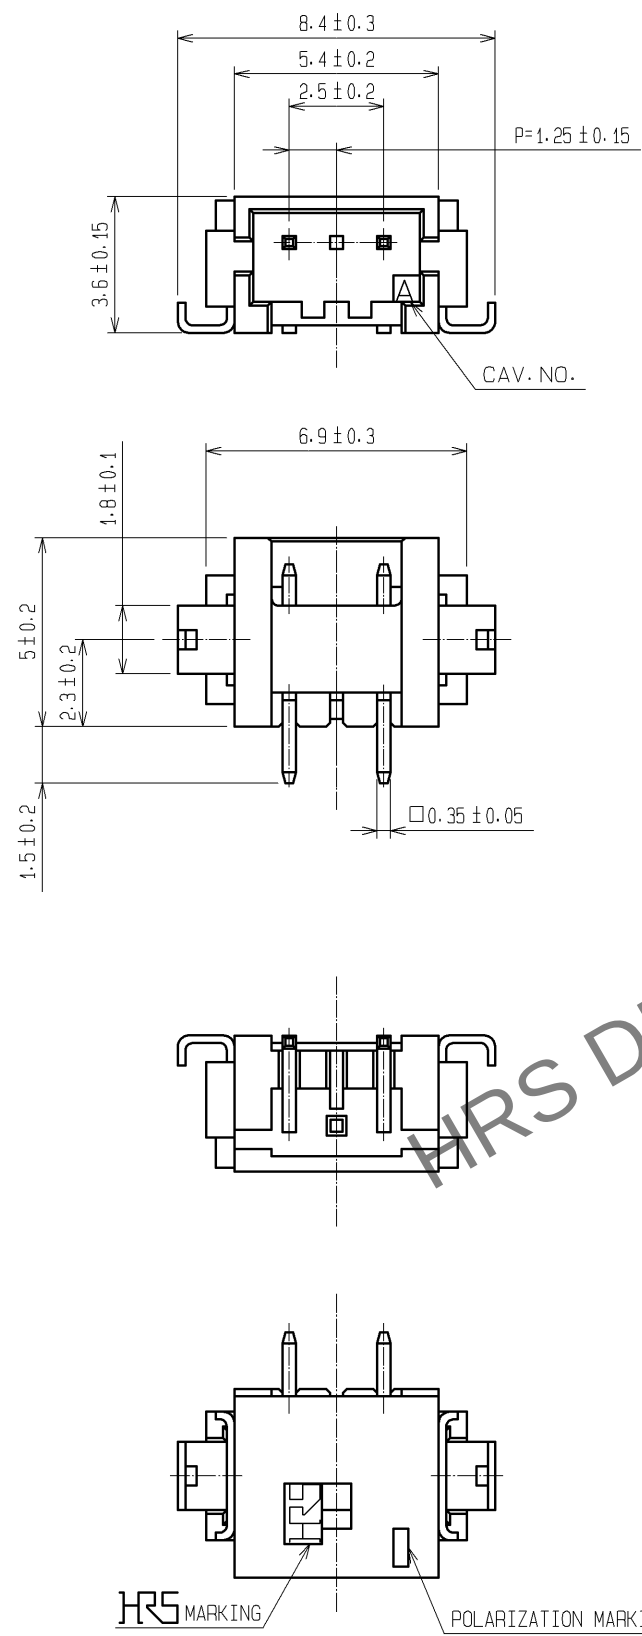


3 APPLICATION DRAWING

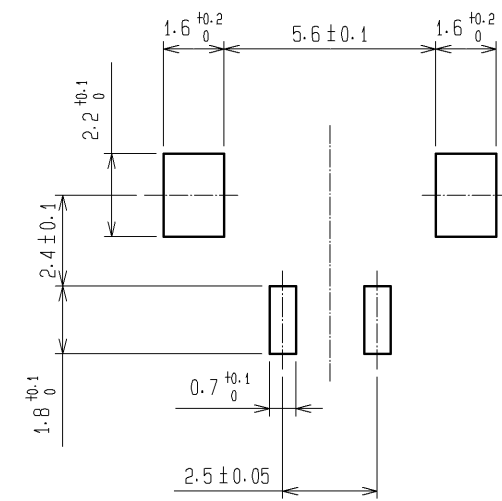


1 RECOMMENDED PATTERN

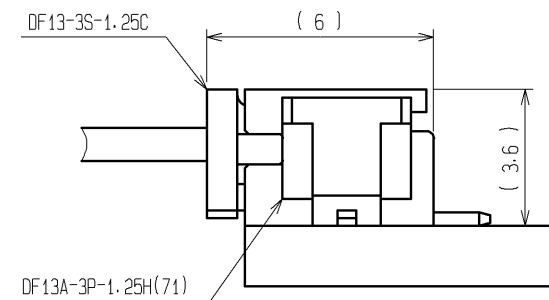

- NOTE 1: WHEN THIS CONNECTOR MATES WITH DF13-3S-1.25C
THE MATING LENGTH IS 3.6 mm.
- 2: FLATNESS OF LEAD WITH REINFORCED METAL FITTINGS SHALL BE WITHIN
0.1mm.
- 3: RECOMMENDED THICKNESS OF CREAM SOLDER PASTE: 0.15-0.2mm
OPEN AREA RATION: 100%

2	BRASS	SURFACE : TIN PLATED 1#mm min. UNDER PLATING:COPPER PLATED 1#mm min	5	POLYESTER	COVER TAPE. CLEAR			
1	POLYAMIDE	BEIGE (UL94V-0)	4	PS	EMBOSSED CARRIER TAPE , CLEAR			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED : HK. UMEHARA		11.09.22		DRAWING NO.	EDC3-083459-02		
	CHECKED : HK. UMEHARA		11.09.22		PART NO.	DF13A-3P-1. 25H(71)		
	DESIGNED : HT. SATO		11.09.22		CODE NO.	CL536-0302-0-71		
	DRAWN : MI. SAKIMURA		11.09.20					

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

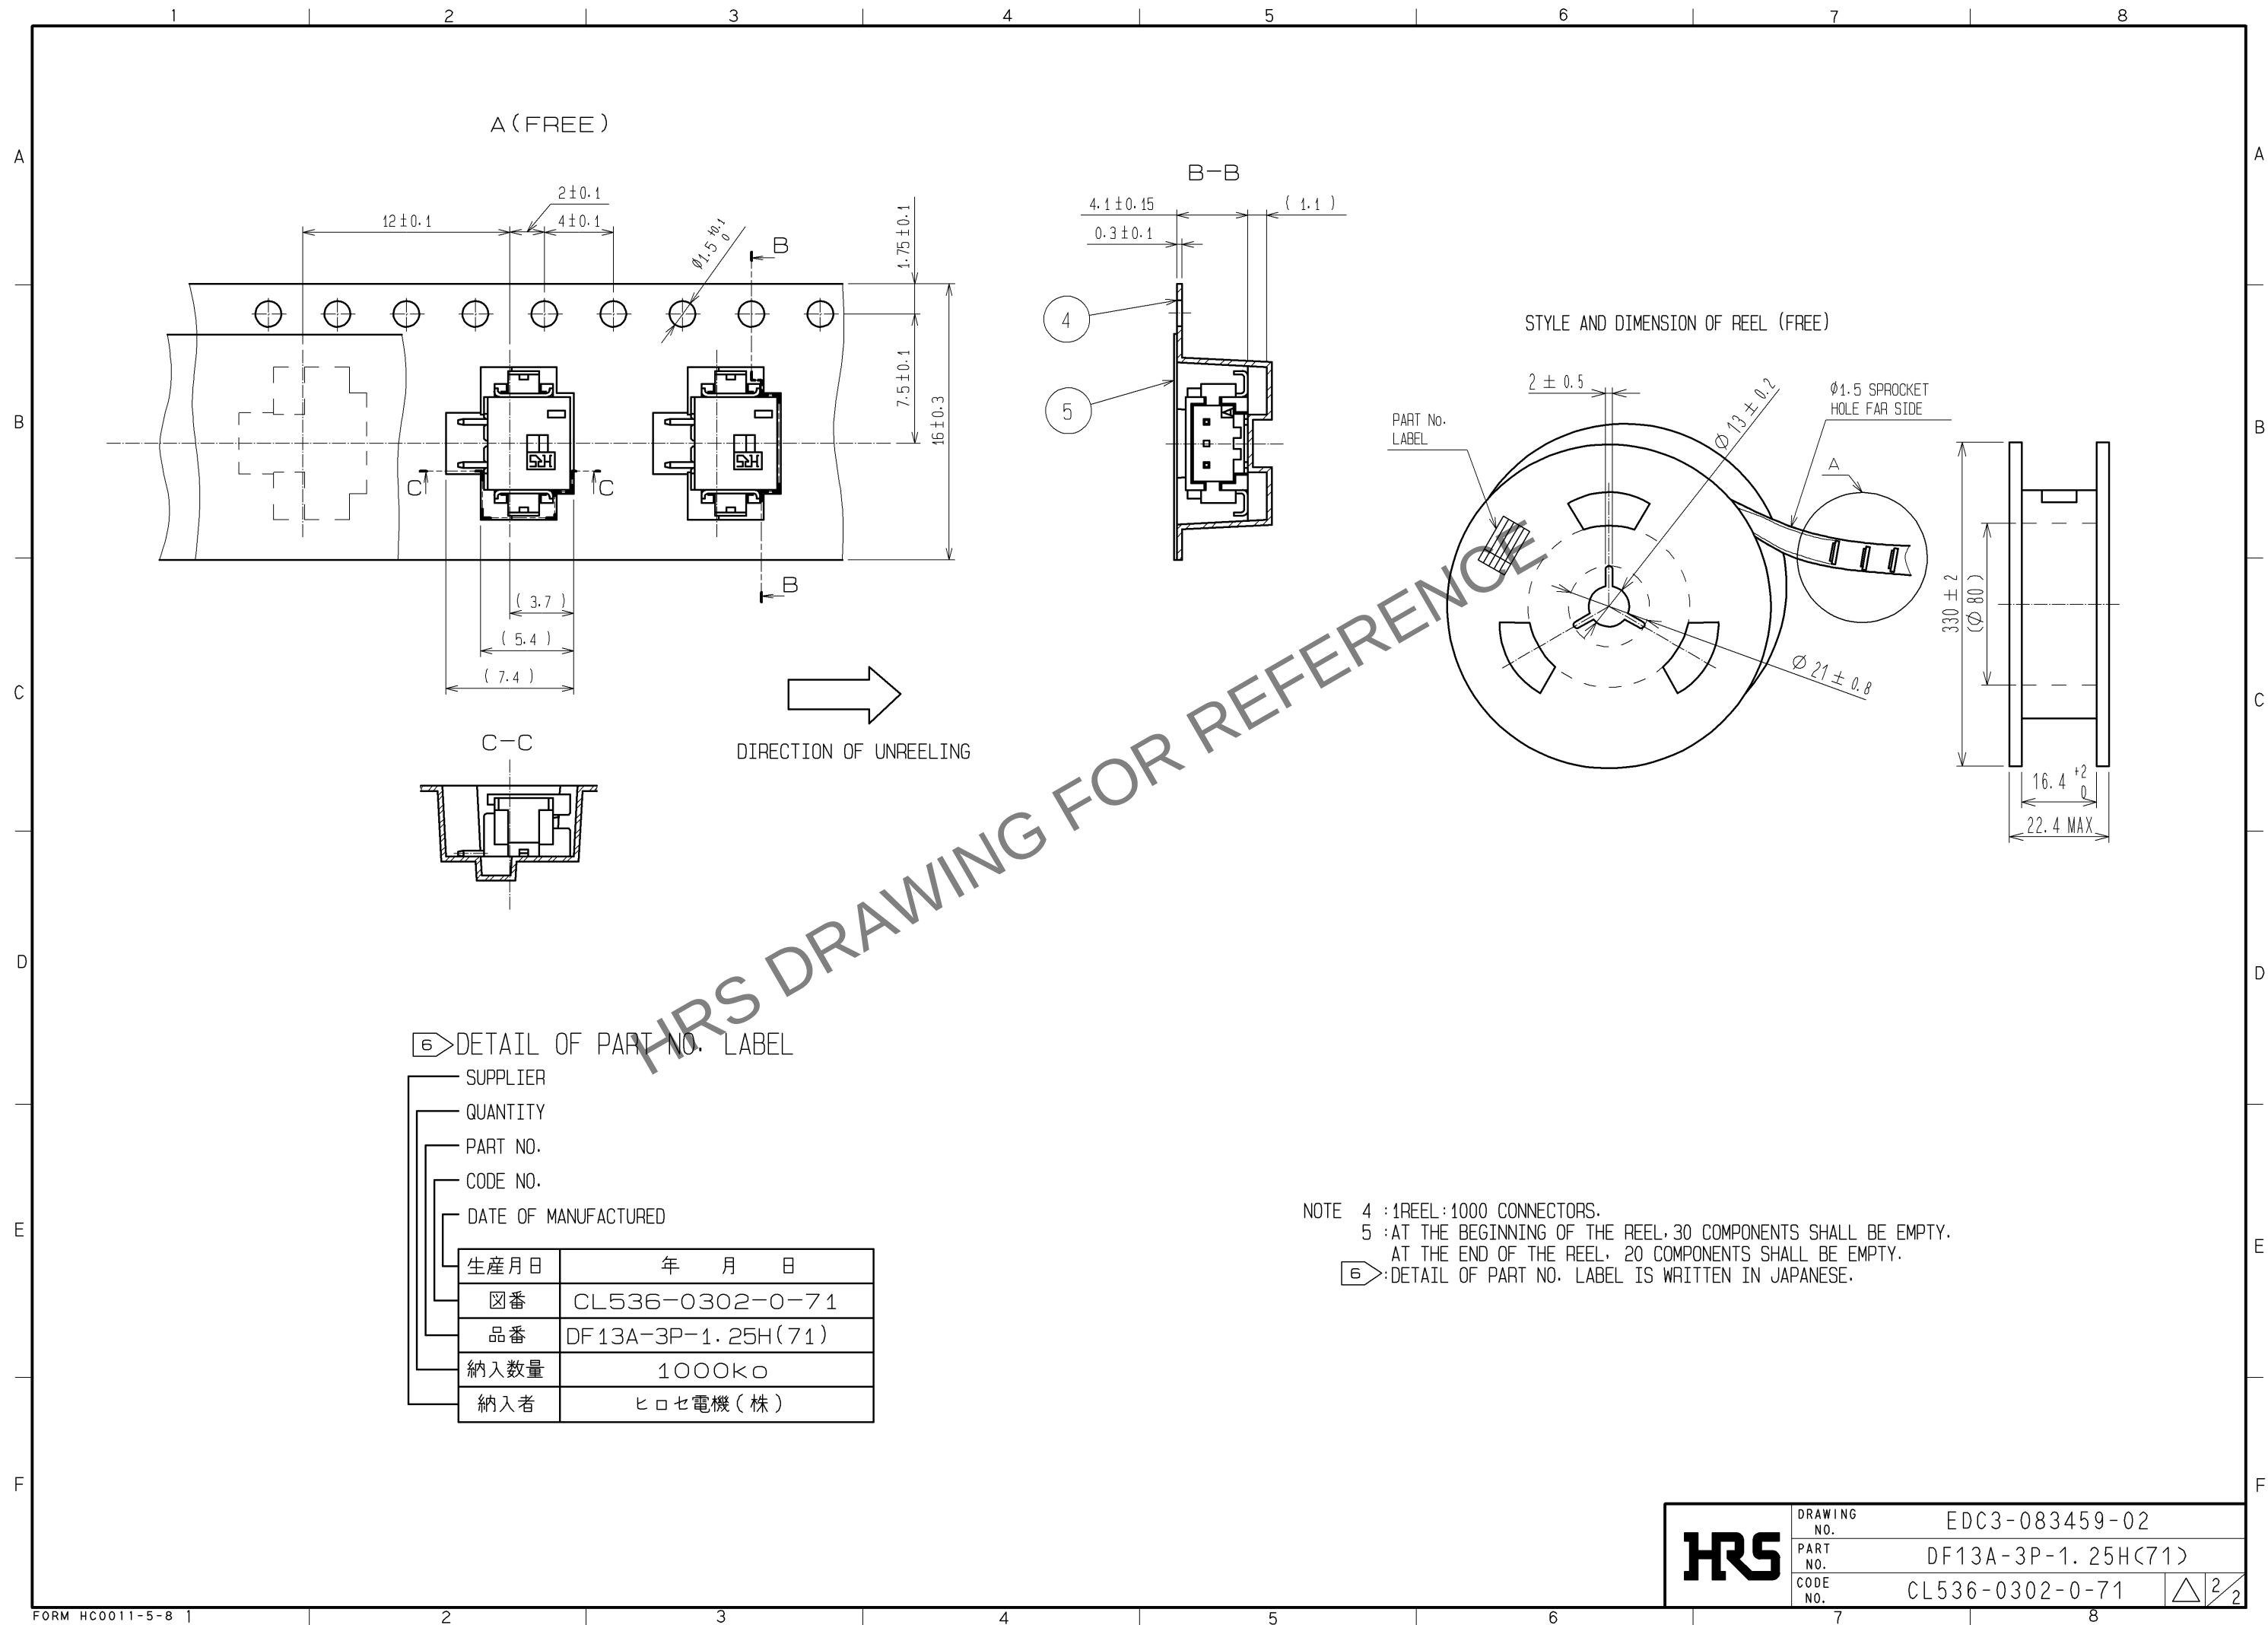

HRS	DRAWING NO.	EDC3-083459-02
	PART NO.	DF13A-3P-1.25H(71)
	CODE NO.	CL536-0302-0-71
		$\triangle$ 2/2