

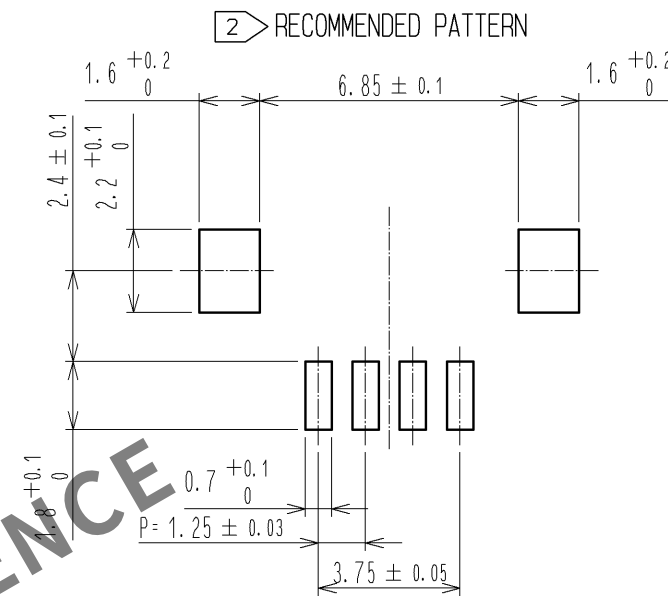
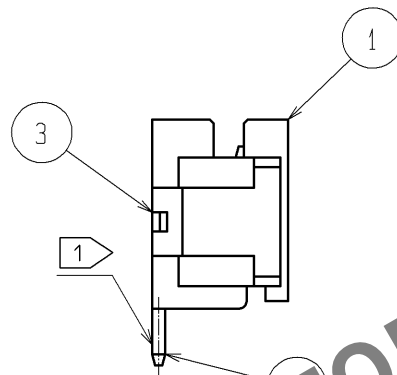
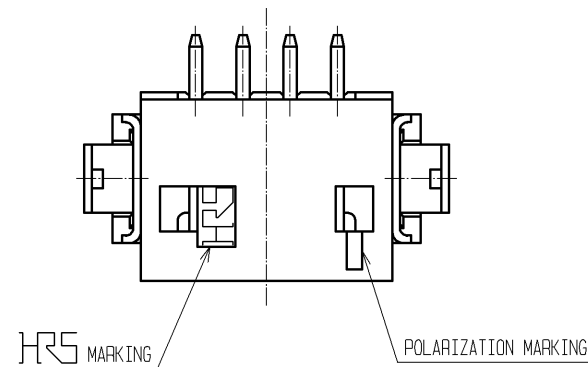
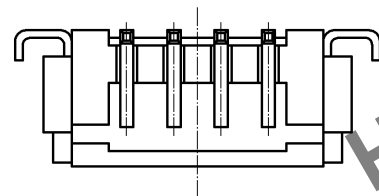
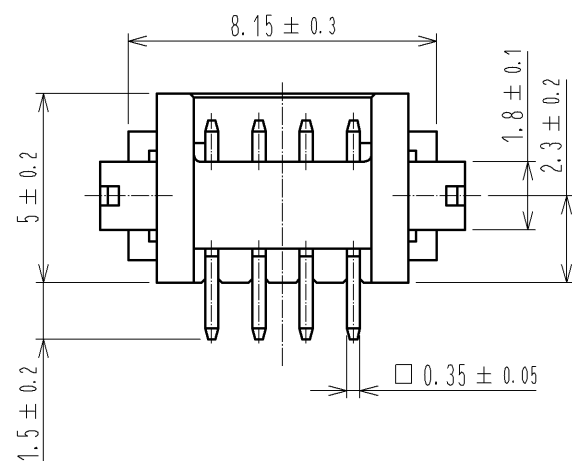



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

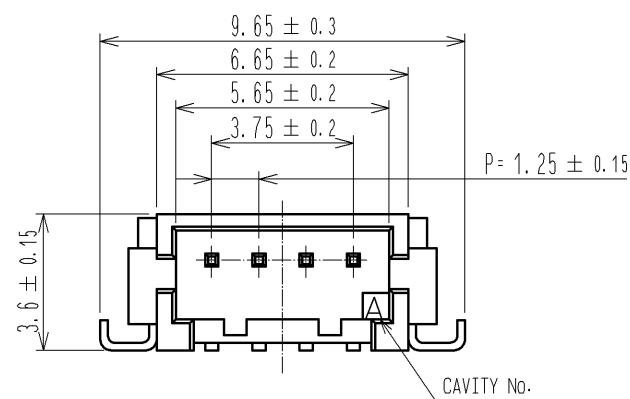

APPLICATION DRAWING

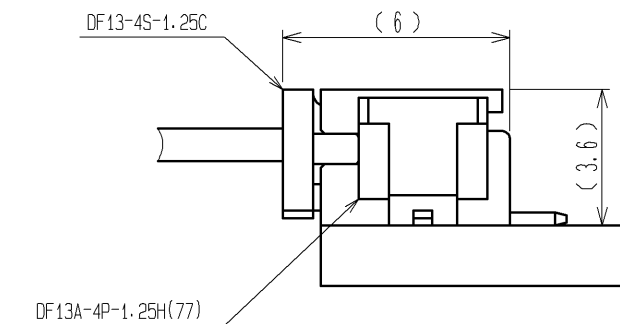

- NOTE 1: FLATNESS OF LEAD WITH REINFORCED METAL FITTINGS SHALL BE WITHIN 0.1mm.
2: RECOMMENDED THICKNESS OF CREAM SOLDER PASTE: 0.15~0.2mm
OPEN AREA RATION: 100%

2	BRASS	SURFACE:GOLD PLATED 0.76μm min. UNDER:NICKEL PLATED 0.5μm min.		5	POLYESTER	COVER TAPE. CLEAR			
1	POLYAMIDE	BEIGE(UL94V-0)		4	PS	EMBOSSED CARRIER TAPE , CLEAR			
				3	PHOSPHOR BRONZE	SURFACE : TIN PLATED 1μmm min.			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		13. 09. 13		DRAWING NO. EDC3-083460-02			
		CHECKED : HK. UMEHARA		13. 09. 12		PART NO. DF13A-4P-1. 25H(77)			
		DESIGNED : TS. KUMAZAWA		13. 09. 12		CODE NO. CL536-0303-3-77			
		DRAWN : TS. KUMAZAWA		13. 09. 12		 1/2			

