

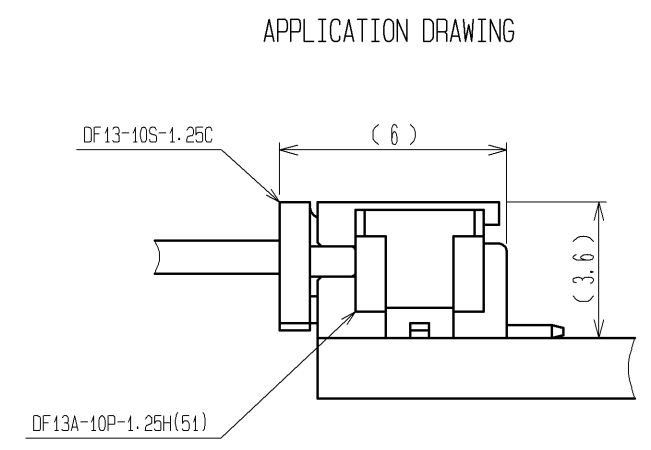


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

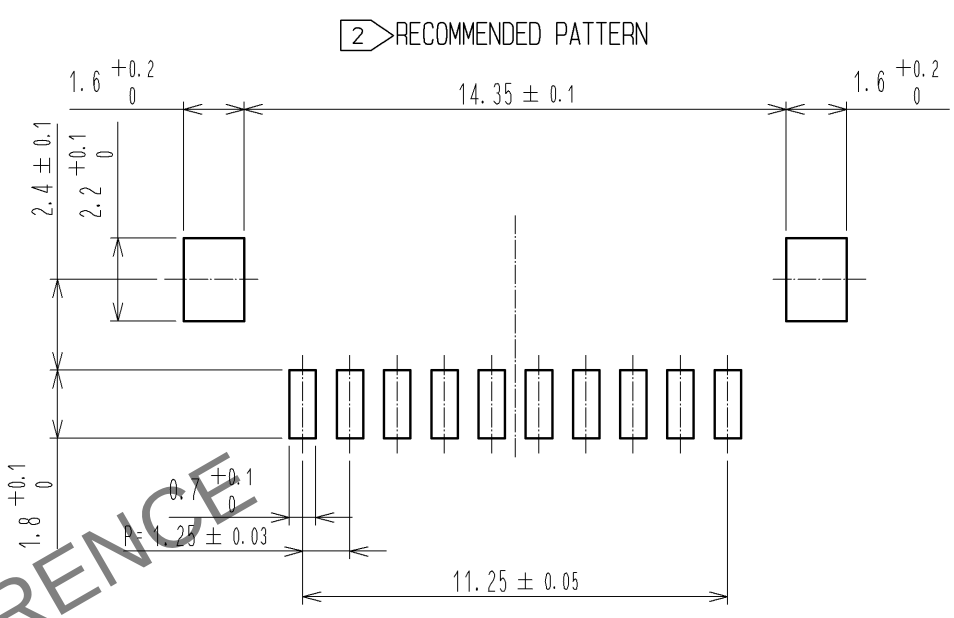

NOTE 1: FLATNESS OF LEAD WITH REINFORCED METAL FITTINGS SHALL BE WITHIN 0.1mm.
2: RECOMMENDED THICKNESS OF CREAM SOLDER PASTE: 0.15~0.2mm
OPEN AREA RATION: 100%

3	PHOSPHOR BRONZE	SURFACE : TIN PLATED 1μm min.						
2	BRASS	SURFACE : GOLD PLATED 0.2μm min. UNDER : NICKEL PLATED 1μm min.		5	POLYESTER	COVER TAPE, CLEAR		
1	POLYAMIDE	BEIGE(UL94V-0)		4	PS	EMBOSSED CARRIER TAPE , CLEAR		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA	08.09.11	DRAWING NO. EDC3-083466-02				
		CHECKED : TS. SAKATA	08.09.11	PART NO. DF13A-10P-1.25H(51)				
		DESIGNED : SN. KOBAYASHI	08.09.10	CODE NO. CL536-0309-0-51				
		DRAWN : YK. NAKATSU	08.09.10	1/2				

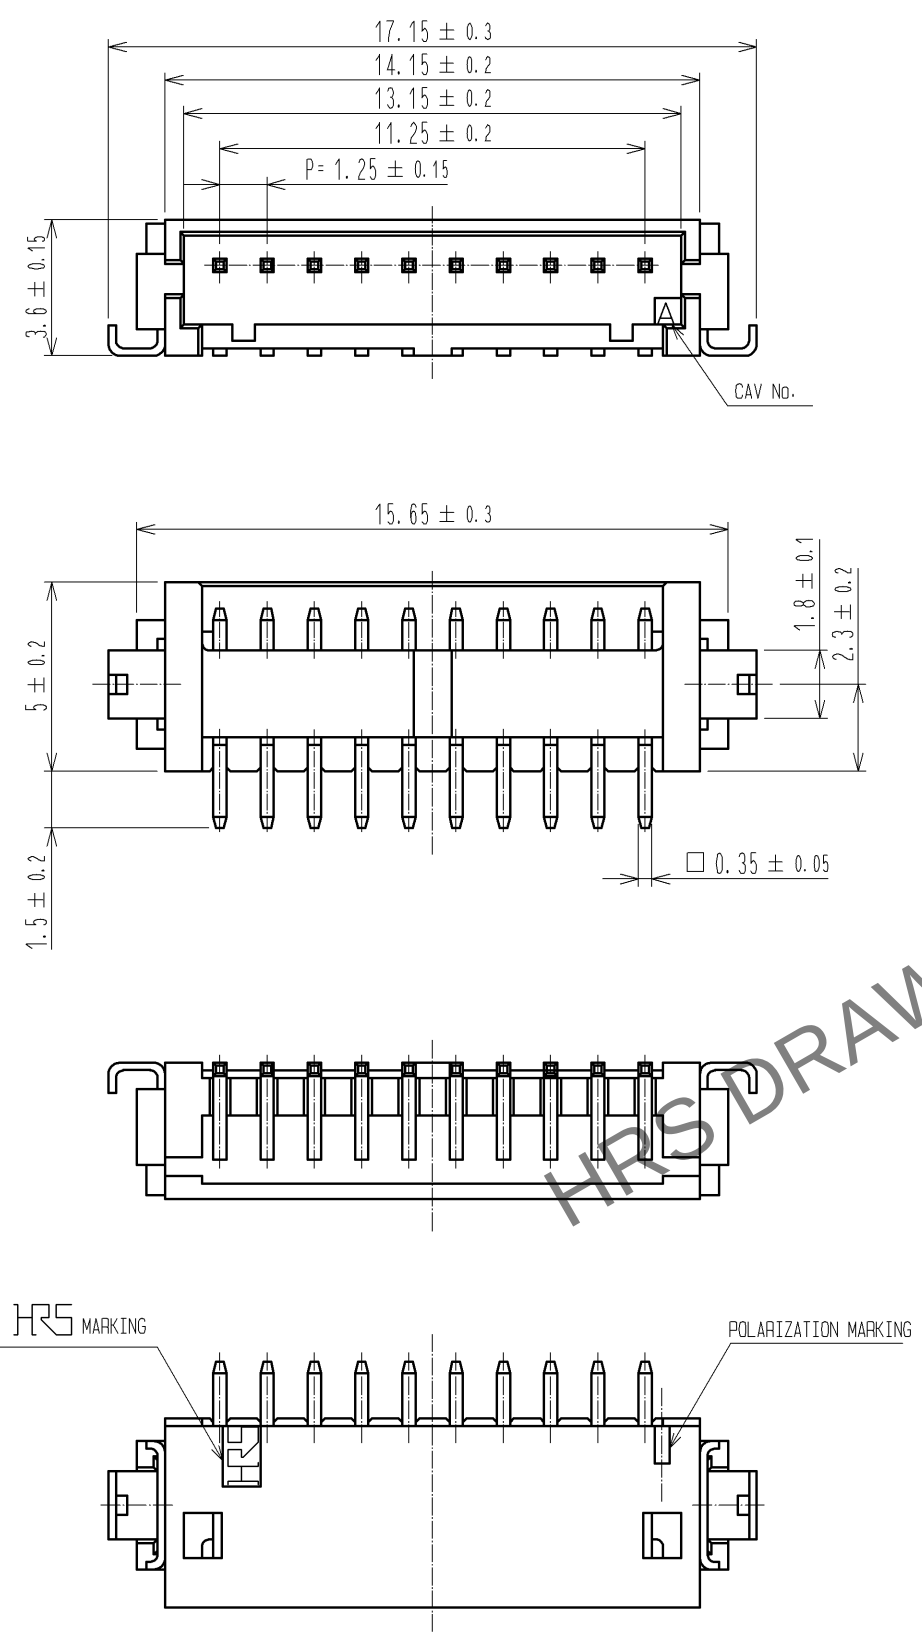