Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

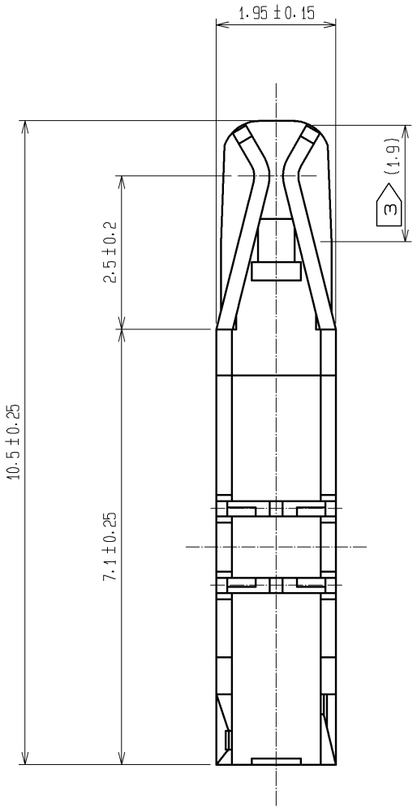


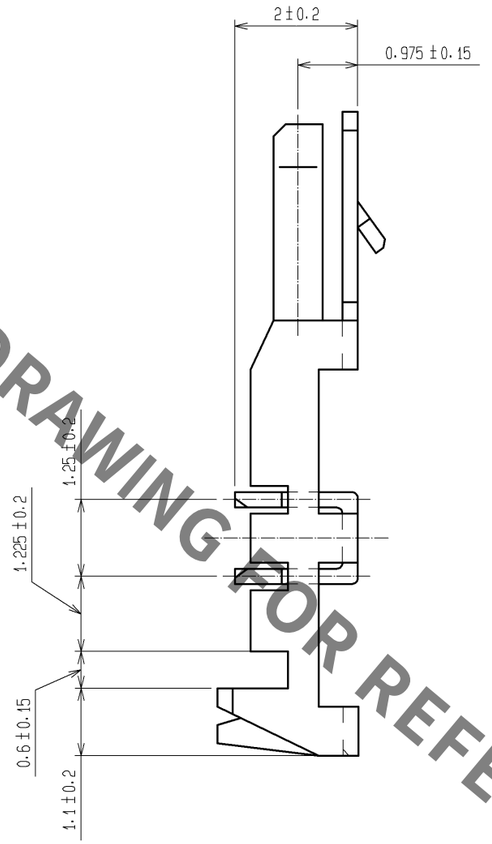


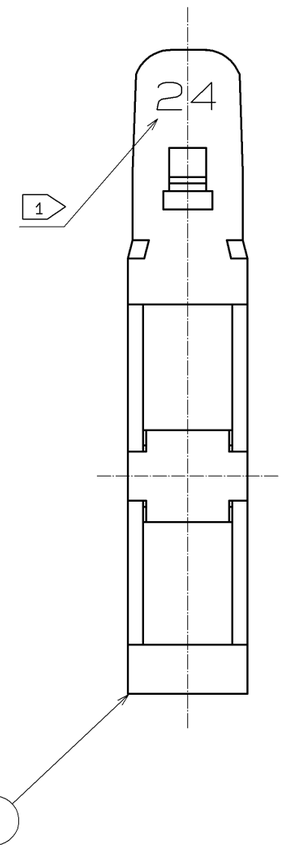


| HRS No. | PART NO. | 1 STAMPED CHARACTER | 2 APPLICABLE CABLE |
|---|---|---|---|
| CL541-0266-4-06 | DF1B-R28A(06) | 28 | UL1007 AWG28 |

NOTES
1. INDICATE APPLICABLE CABLE AWG No.
2. JACKET DIAMETER φ0.9 to φ1.39.
3. RANGE OF GOLD PLATED.
4. 1PACK:100 CONNECTORS.

| NO. | MATERIAL | FINISH , REMARKS |
|---|---|---|
| 1 | PHOSPHOR BRONZE | CONTACT AREA:GOLD PLATED 0.2μm min<br>OTHER AREA:TIN PLATED 2.0μm min<br>UNDER PLATING:NICKEL PLATED 1.0μm min |

| UNITS | SCALE | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|---|---|---|---|---|---|---|
| mm | 10:1 | | | | | |

HIROSE ELECTRIC CO., LTD.

| | | |
|---|---|---|
| APPROVED | KI. AKIYAMA | 12.10.22 |
| CHECKED | HK. UMEHARA | 12.10.22 |
| DESIGNED | KY. SHIMAKURA | 12.10.22 |
| DRAWN | MI. SAKIMURA | 12.10.19 |

| | |
|---|---|
| DRAWING NO. | EDC3-020660-01 |
| PART NO. | DF1B-R28A(06) |
| CODE NO. | CL541-0266-4-06 |

△ 1/1