

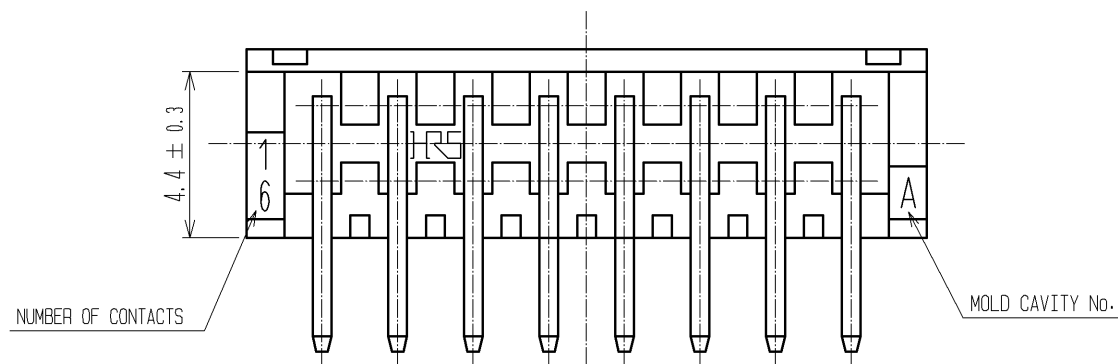
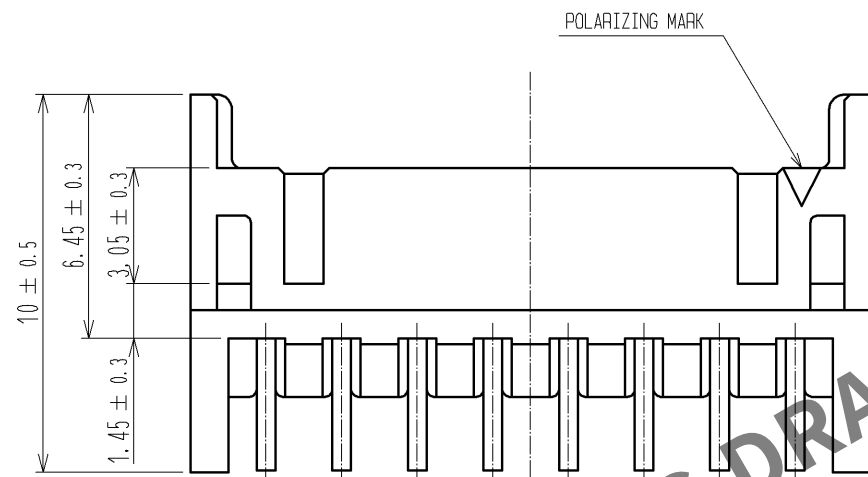
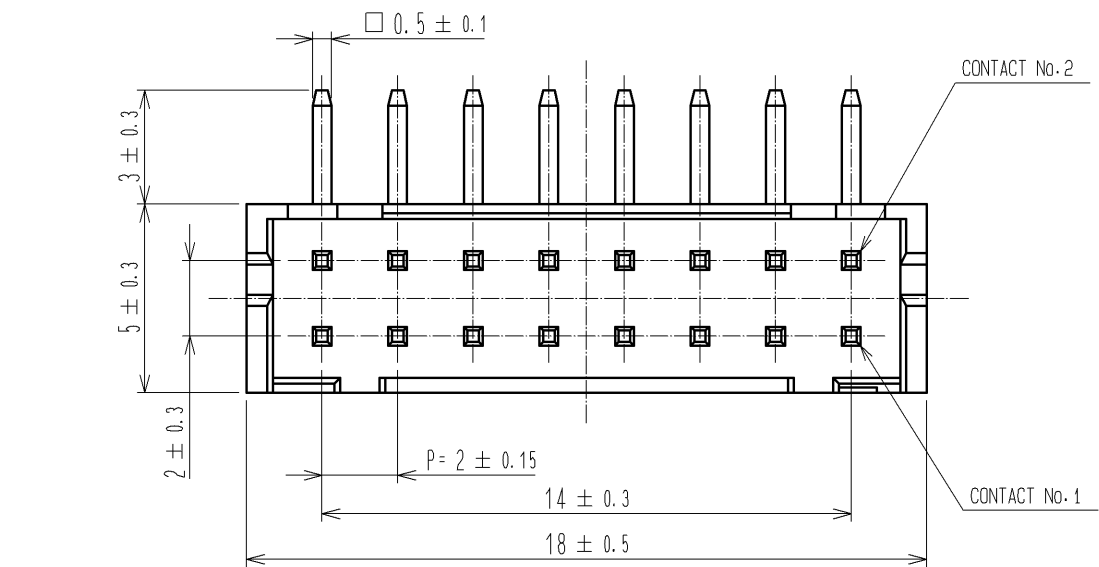



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

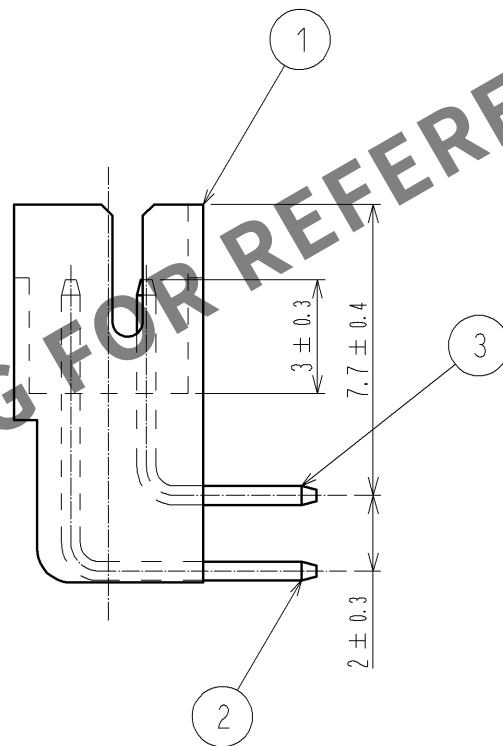


RECOMMENDED PATTERN (BOARD THICKNESS $t=1.6\text{mm}$)

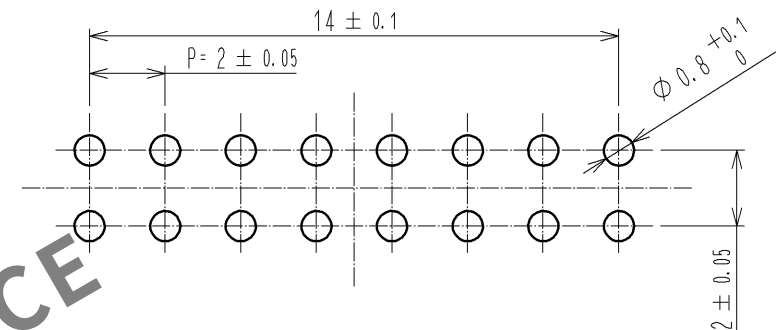

			5	EPT-R-M		STOPPER: GRAY	
2	BRASS	SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min		4	PS	ELECTROSTATIC PROTECTION: CLEAR	
1	POLYAMIDE	UL94V-0: BLACK		3	BRASS	SURFACE:TIN PLATED 1μm min  UNDER PLATING:NICKEL PLATED 0.5μm min	
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-005308	DESIGNED MI. SAKIMURA	CHECKED TS. FUKUSHIMA	DATE 10.11.18
 HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA		08.10.28	DRAWING NO. EDC3-020839-01			
		CHECKED : TS. KUMAZAWA		08.10.28	PART NO. DF11-16DP-2DS(24)			
		DESIGNED : KT. ISHII		08.10.21	CODE NO. CL543-0539-8-24			
		DRAWN : KT. ISHII		08.10.21	 1/2			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

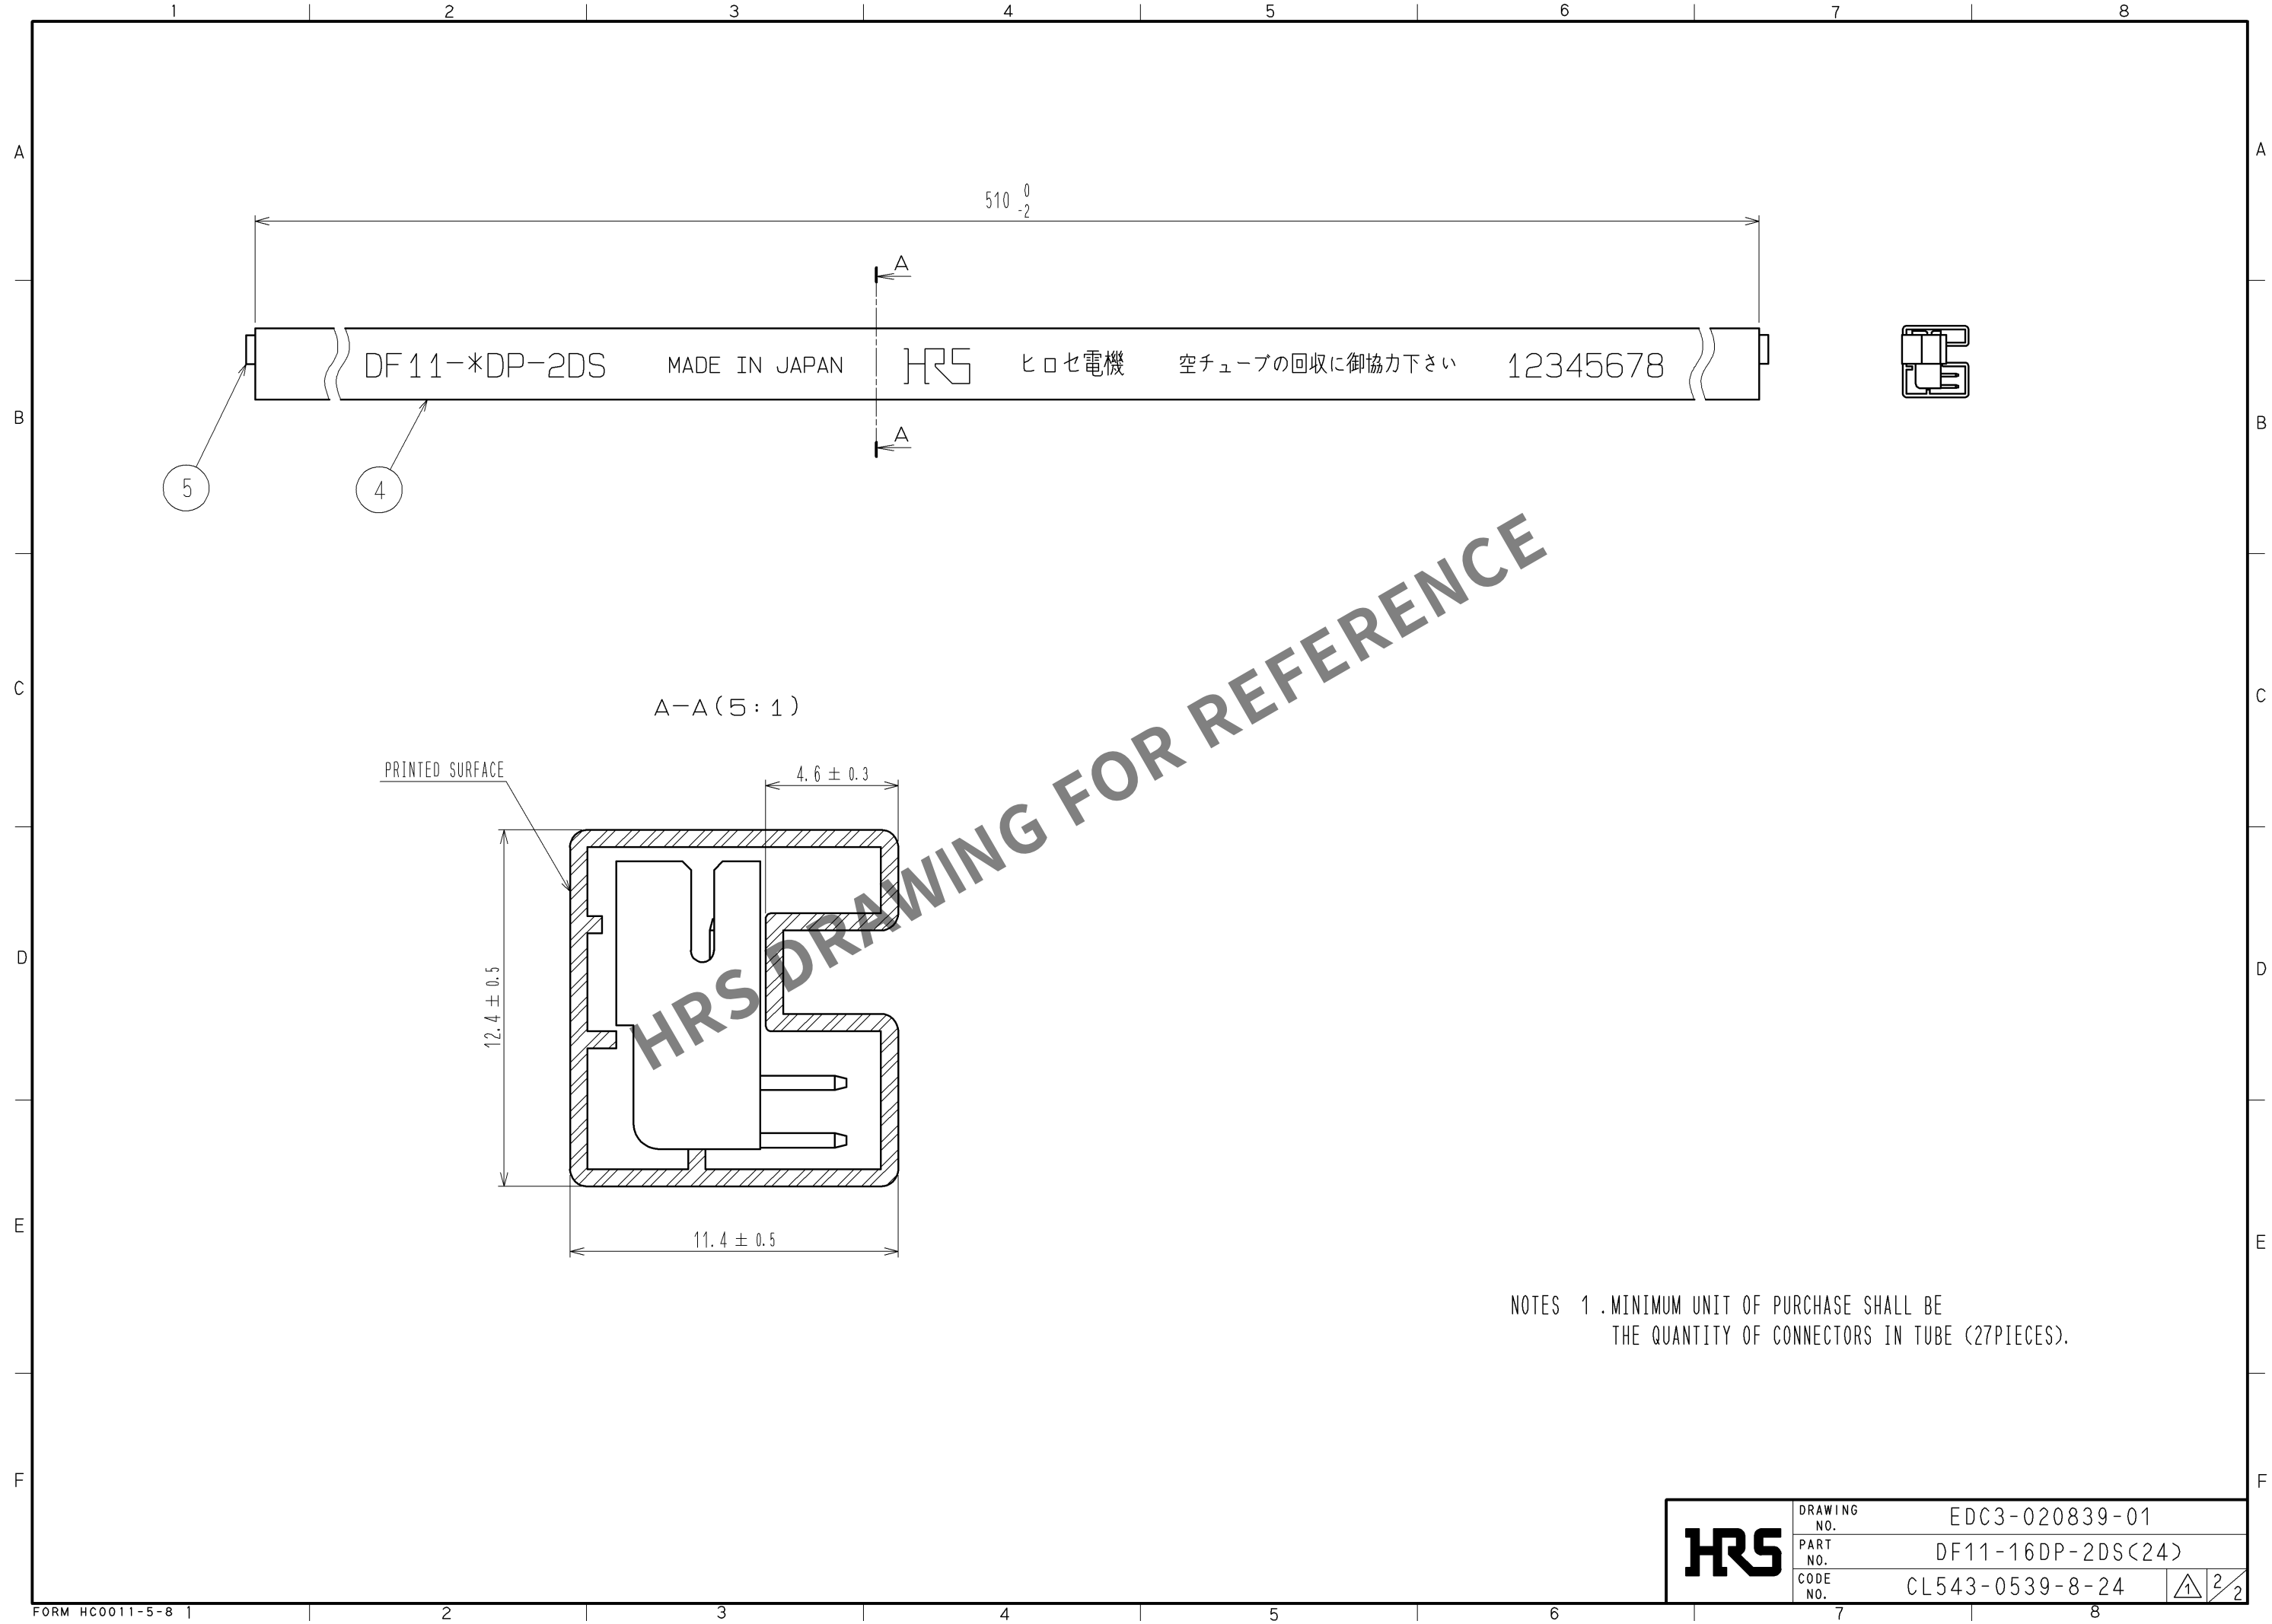

NOTES 1 .MINIMUM UNIT OF PURCHASE SHALL BE
THE QUANTITY OF CONNECTORS IN TUBE (27PIECES).

HRS	DRAWING NO.	EDC3-020839-01	
	PART NO.	DF11-16DP-2DS(24)	
	CODE NO.	CL543-0539-8-24	2/2