
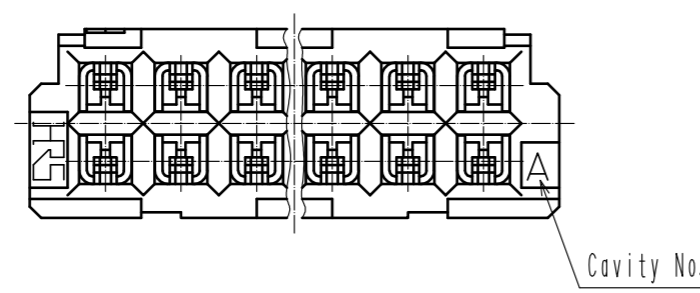
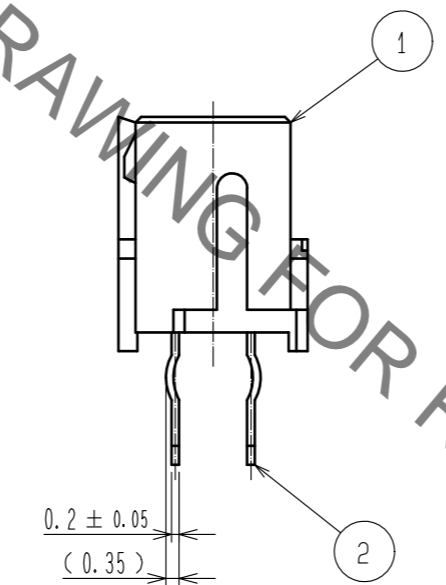
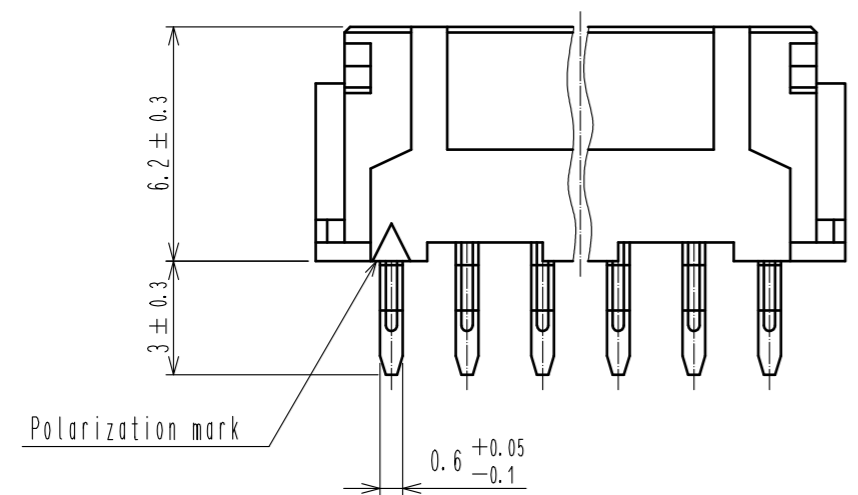
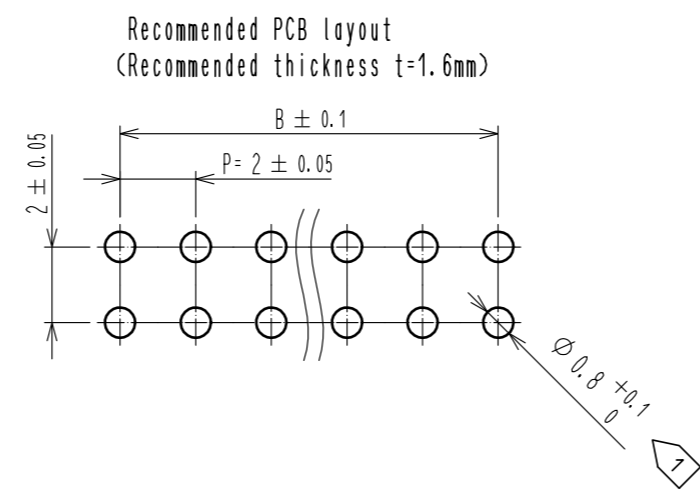


Oct.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

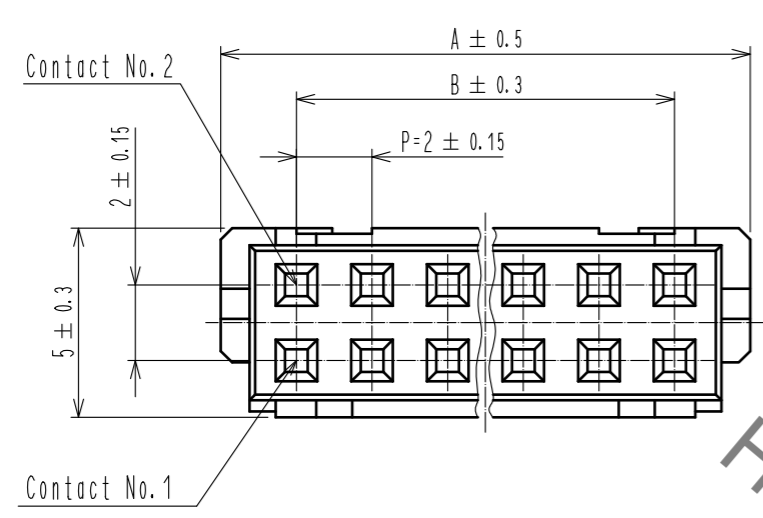

CODE No.	PART No.	Number of Contact	A	B	
—	DF11- 6DS-2DSA (56)	6	8.0	4.0	
—	DF11- 8DS-2DSA (56)	8	10.0	6.0	
—	DF11-10DS-2DSA (56)	10	12.0	8.0	
△	543-0556-7-56	DF11-12DS-2DSA (56)	12	14.0	10.0
—	DF11-14DS-2DSA (56)	14	16.0	12.0	
—	DF11-16DS-2DSA (56)	16	18.0	14.0	
—	DF11-18DS-2DSA (56)	18	20.0	16.0	
543-0560-4-56	DF11-20DS-2DSA (56)	20	22.0	18.0	
—	DF11-22DS-2DSA (56)	22	24.0	20.0	
—	DF11-24DS-2DSA (56)	24	26.0	22.0	
—	DF11-26DS-2DSA (56)	26	28.0	24.0	
—	DF11-28DS-2DSA (56)	28	30.0	26.0	
—	DF11-30DS-2DSA (56)	30	32.0	28.0	
—	DF11-32DS-2DSA (56)	32	34.0	30.0	

Notes ① If pre-fixation to PCB before flow soldering is required, through hole dimension shall be  $\phi 0.8^{+0.05}$ .  
2. The minimum order quantity is by the one pack amount '100 pieces'.

1	Polyamide	UL94V-0, Black	2	Phosphor bronze	Contact area : Gold plated 0.76 $\mu$ m min. Lead area : Gold plated 0.05 $\mu$ m min. Under plating : Nickel plated 0.5 $\mu$ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00003531	DESIGNED TS. MIYAKI
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 17.07.18	DRAWING NO. EDC-162401-56-00		
		CHECKED : TS. FUKUSHIMA 17.07.18	PART NO. DF11- *DS-2DSA (56)		
		DESIGNED : TS. MIYAKI 17.07.18	CODE NO. CL543-		
		DRAWN : MI. SAKIMURA 17.07.14	①/1		